SIEMENS

Data sheet 3RT2926-1MR00



Surge suppressor, diode combination with LED, 24 V DC, for motor contactors Size S0,

General technical data		
product brand name		SIRIUS
product designation		surge suppressor
size of contactor		S0
design of the surge suppressor		with diode assemblies
ambient temperature		
● during storage	°C	-40 ... +80
● during operation	°C	-25 ... +60
Control circuit/ Control		
type of voltage of the control supply voltage		DC
control supply voltage 1		
● at DC rated value	V	24
Installation/ mounting/ dimensions		
mounting position		any
fastening method		clip-on
width	mm	30
height	mm	19
depth	mm	12
Certificates/ approvals		
certificate of suitability		CE / UL / CSA / CCC

General Product Approval	EMC	Declaration of Conformity
CSA, UR, EAC, RCM		Miscellaneous, EG-Konf.

Test Certificates		Shipping Approval			
Special Test Certificate	Type Test Certificates/Test Report	BUREAU VERITAS	PRS	RINA	RMRS

other	Railway


Subject to change without notice
© Copyright Siemens

Confirmation


Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-1MR00
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-1MR00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-1MR00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-1MR00&lang=en

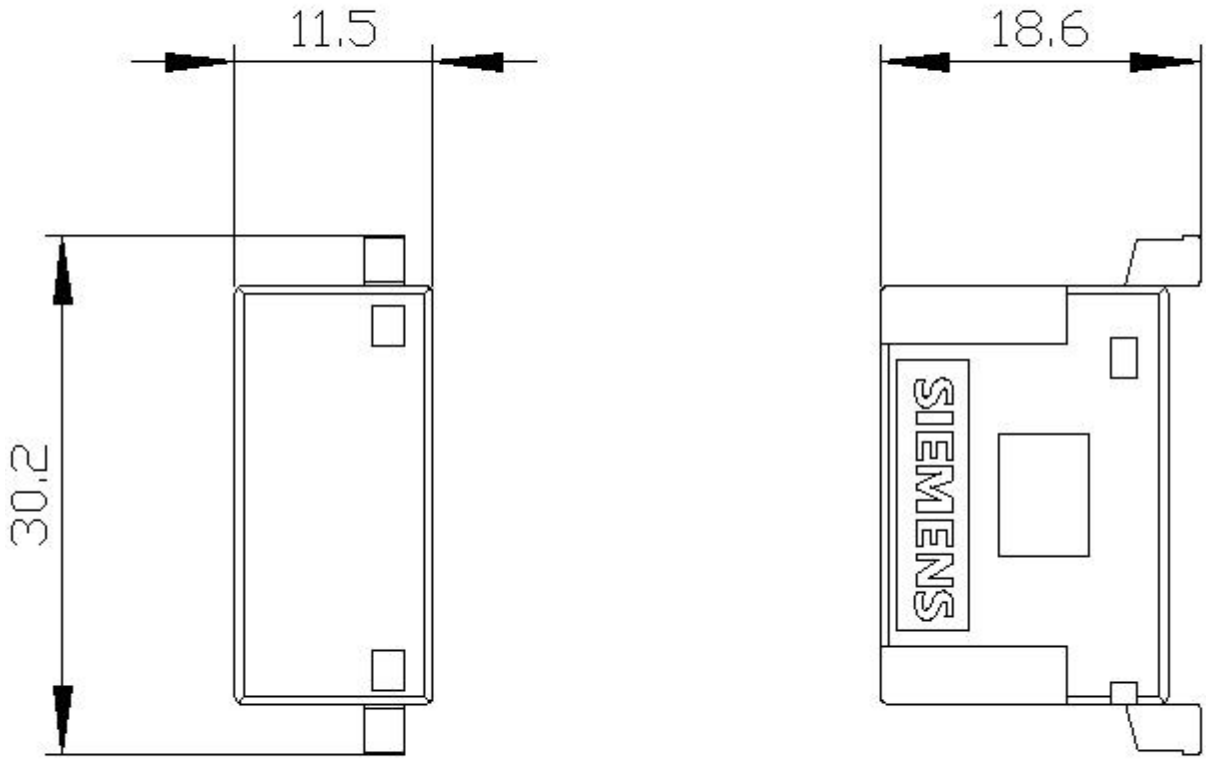

© Copyright Siemens

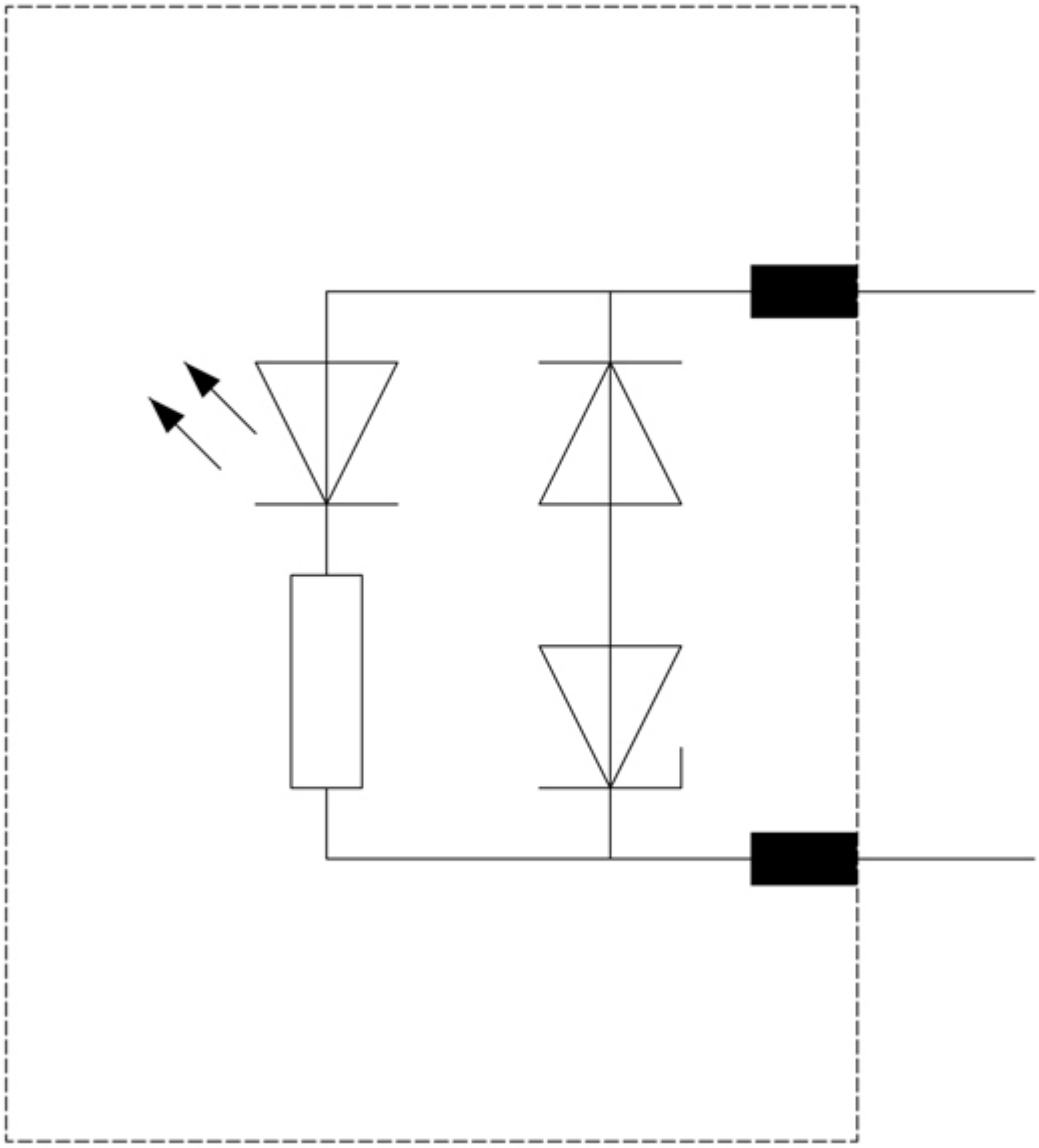

last modified: 5/15/2020

Subject to change without notice
© Copyright Siemens