ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

10826-10886 MHz Cavity Bandpass Filter

Part Number: AB10856B1071

ISO 9001 REGISTERED FIRM

FL12

Electrical specifications

Passband: 10826～10886MHz
Passband Insertion Loss: ≤12.0dB
Passband Ripple: ≤0.5dB
Passband Return Loss: ≥12dB
Passband Group Delay ripple: ≤35 nsec
Rejection 1: ≥55dB@10796MHz,10916MHz
Rejection 2: ≥70dB@10766MHz,10946MHz
Rejection 3: ≥75dB@10736MHz,10976MHz
Rejection 4: ≥80dB@10706MHz,11006MHz
Rejection 5: ≥80dB@10676MHz,11036MHz
Rejection 6: ≥30dB@1000-10000MHz
Rejection 7: ≥35dB@11500-16500MHz
Rejection 8: ≥40dB@16500-23000MHz
Power Handling: 1W(CW)
Input / Output Impedance: 50 Ohms


Mechanical

Connector Type: SMA (F)
Dimensions: 5.80 x .51 x .43 inches

Environmental

Operating Temperature: +15 to +30 deg. C
Storage temperature: -65 to +95 deg.C
Shock: 20 G's, ½ sine, 11ms
Vibration: 10 G's, 10-2000Hz
Relative Humidity: 0-95%

Outline Drawing:

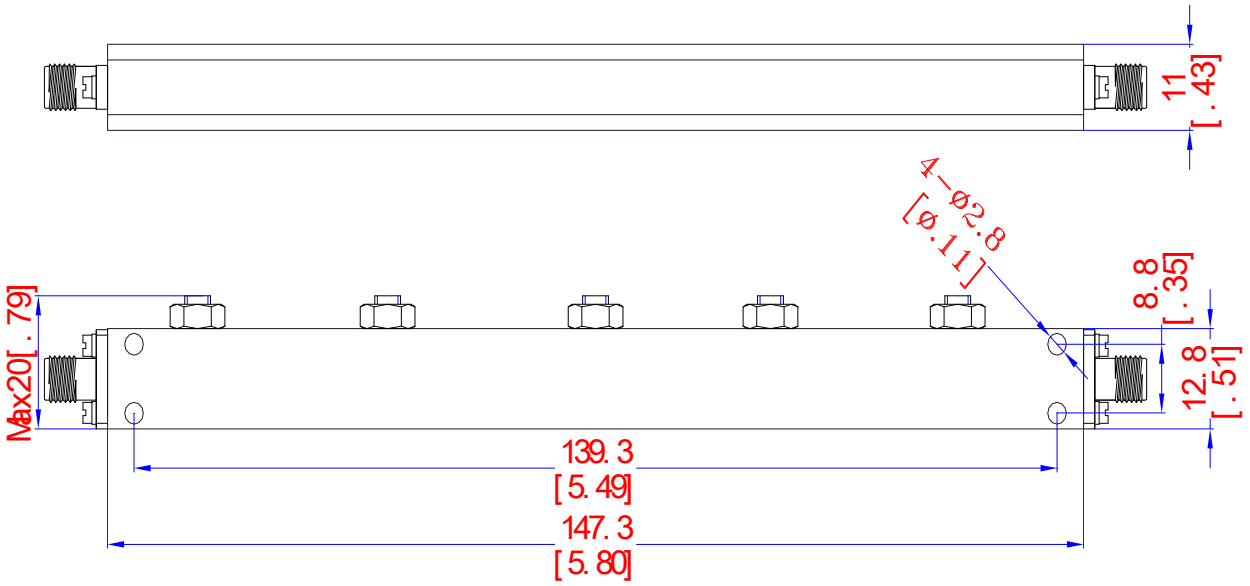

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com