ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1616-1627.5 MHz Cavity Bandpass Filter

Part Number: AB1621B863

ISO 9001 REGISTERED FIRM

Electrical specifications

Center Frequency: 1621.75 MHz
Passband: 1616-1627.5 MHz
Bandwidth: 11.5 MHz
Insertion Loss: 2.5 dB Max
Retun loss: 15 dB Min
Rejection: >45 dB @ 1598 MHz
>45 dB @ 1640 MHz


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N Female
Dimensions: 6.46 x 3.31 x 1.97 Inches

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

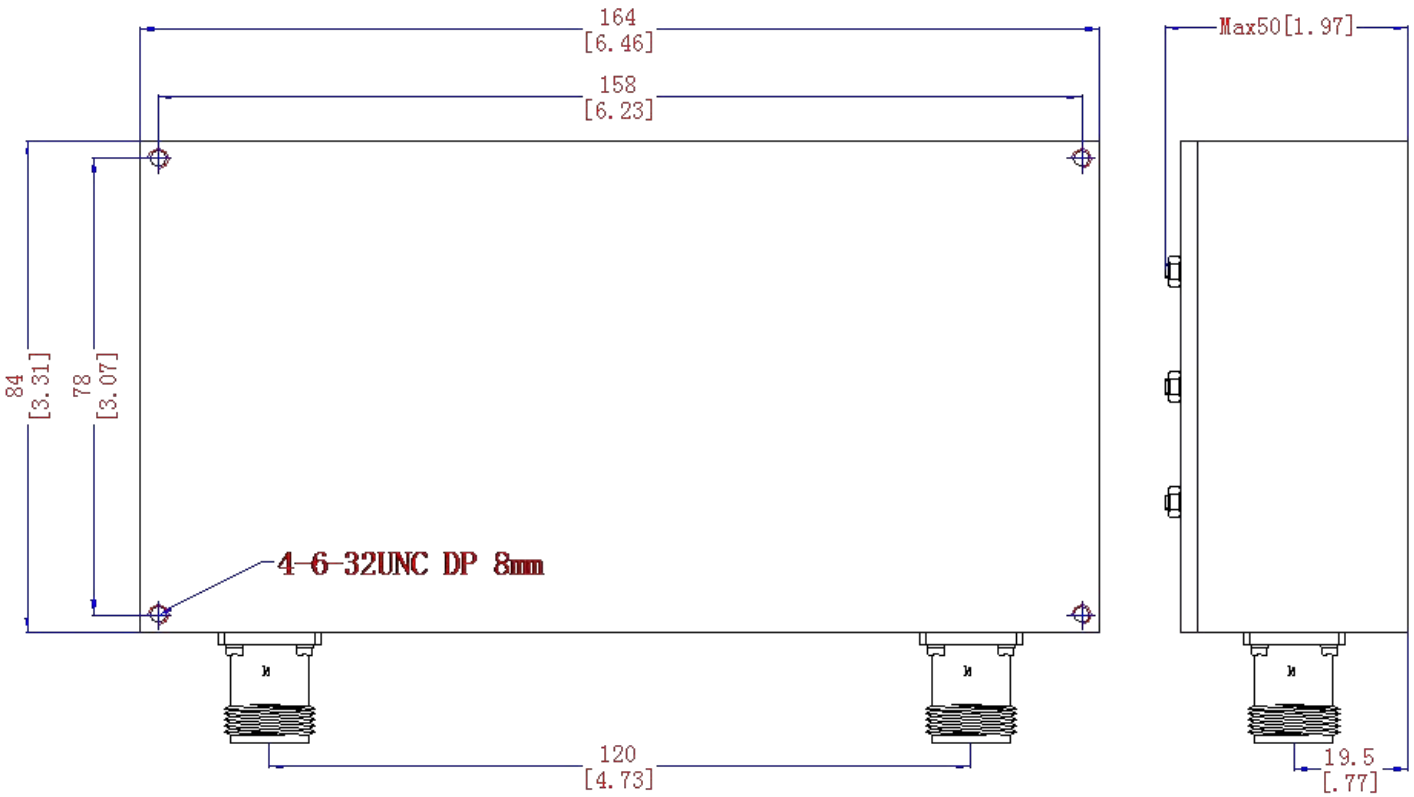

70 Outwater Lane
Garfield, NJ 07026
Phone: (973) 772-4242
Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com