ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1656.8 MHz Cavity Bandpass Filter

Part Number: AB1656B719

ISO 9001 REGISTERED FIRM

Electrical specifications

Center Frequency: 1656.8 MHz
1.5 dB bandwidth: 20 MHz min
Insertion loss in PB: 2.5 dB max
Return loss: 15 dB min
Rejection 1: 50 dBc@ 1578 MHz
Rejection 2: 50 dBc@ 1736 MHz


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 6.4 x 3.3 x 2.2 in

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

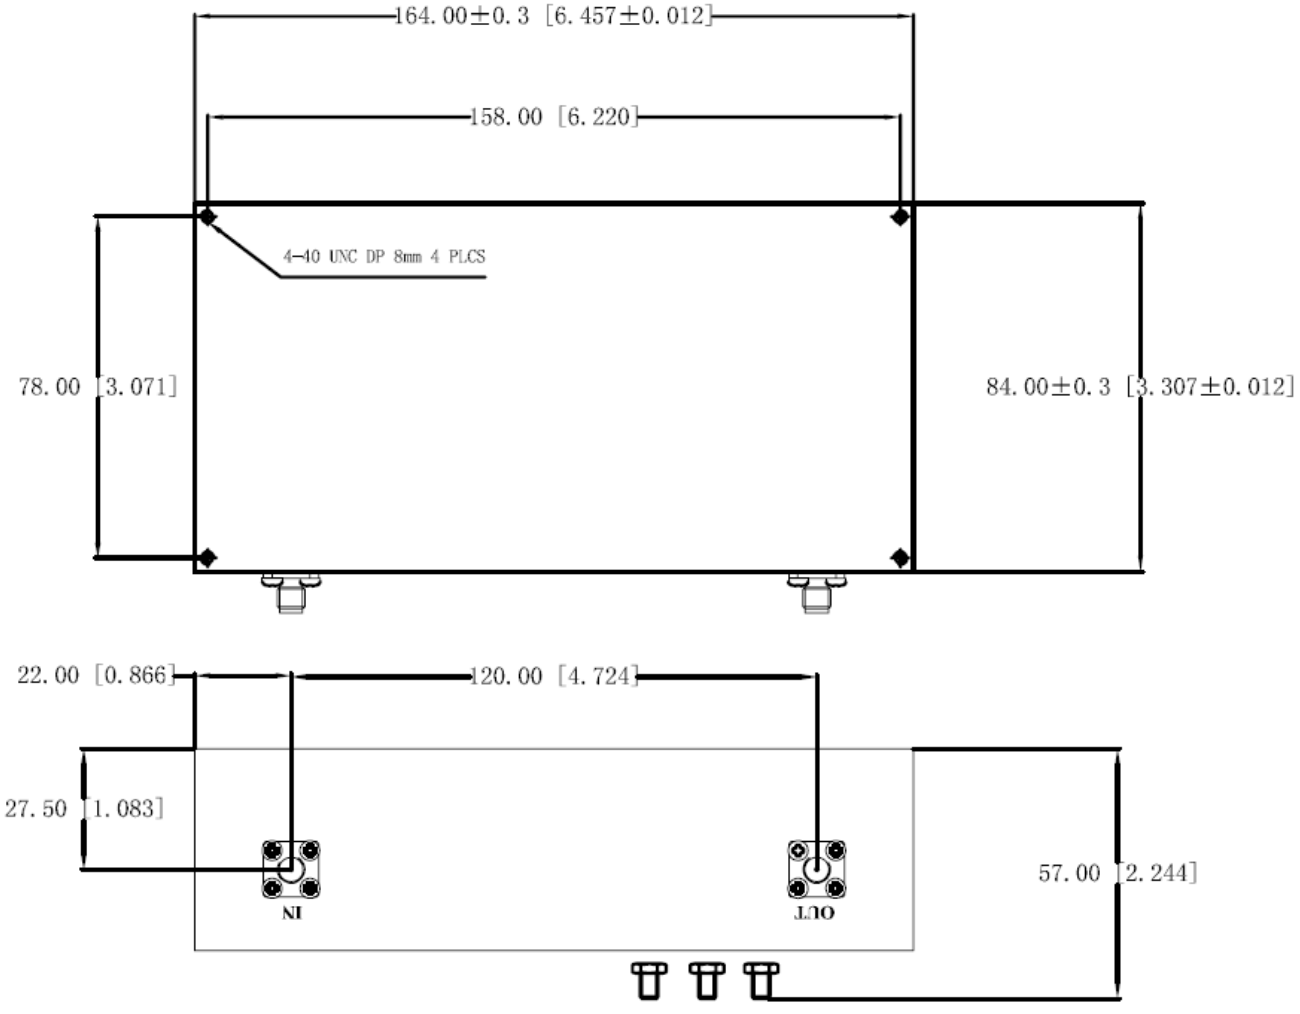

70 Outwater Lane
Garfield, NJ 07026
Phone: (973) 772-4242
Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com


ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1656.8 MHz Cavity Bandpass Filter

Part Number: AB1656B719

ISO 9001
REGISTERED FIRM

Plot:

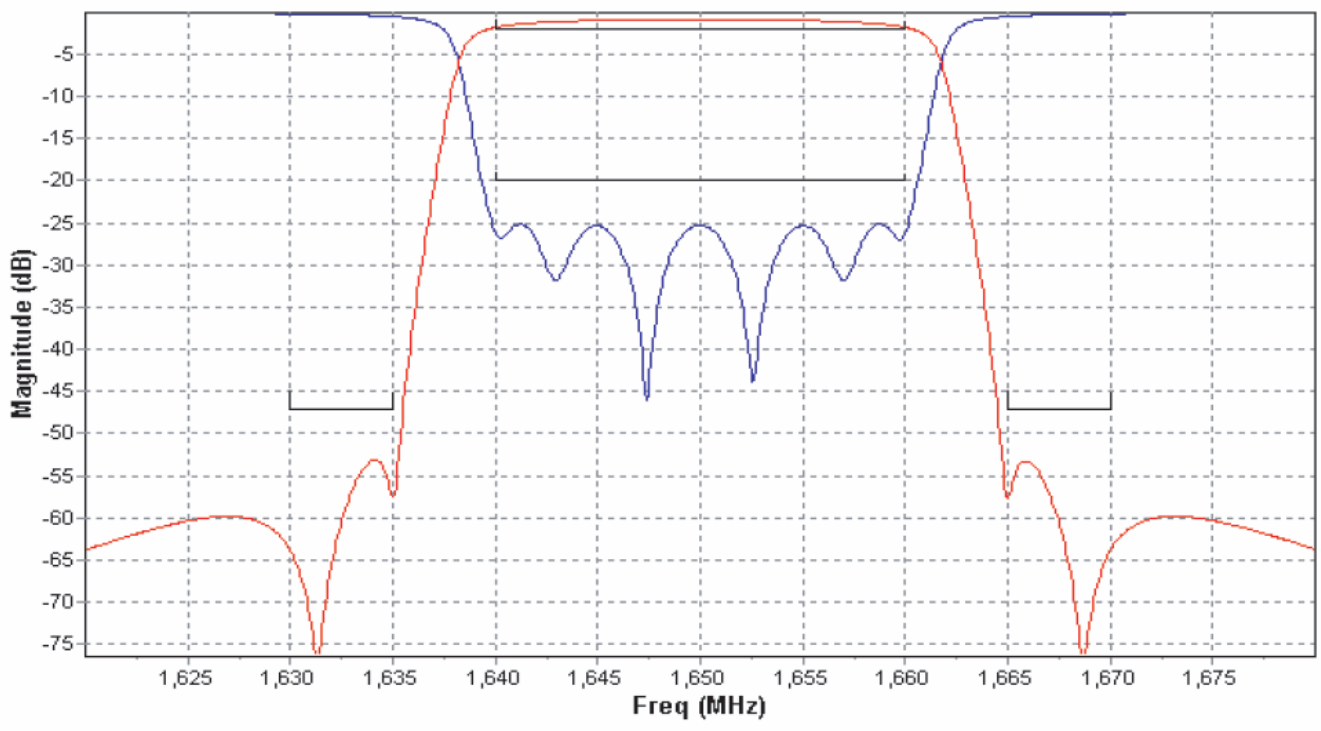

1631 1636 1641 1646 1651 1656 1661 1666 1671 1676 1681

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com