ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1855-1880 MHz Cavity DCS Bandpass Filter

Part Number: AB1867B597

ISO 9001 REGISTERED FIRM

Electrical specifications

RX passband Frequency: 1855-1880 MHz
Insertion loss @ PB: 0.75 dB
Return loss @ PB: 18 dB
Rejection Frequency: 70 dB@1760-1785 MHz


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA (F)
Dimensions: 4.12” X 1.50” X 1.00” in

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

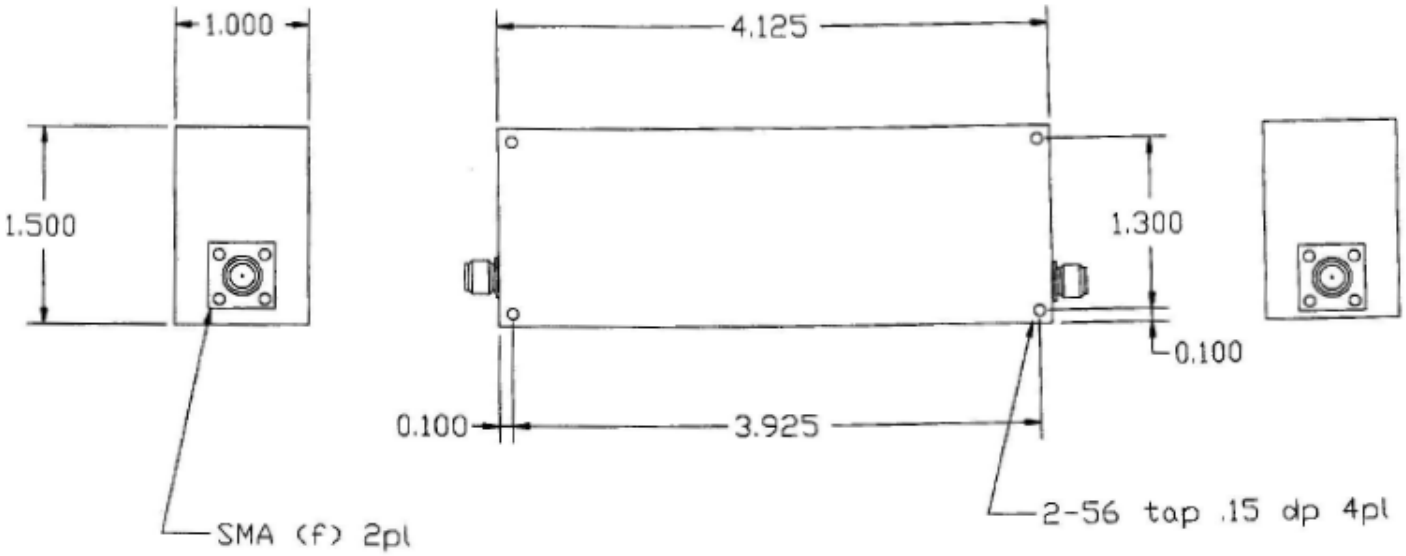

70 Outwater Lane
Garfield, NJ 07026
Phone: (973) 772-4242
Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com