ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

225 MHz Cavity Band Pass Filter

Part Number: AB225B1351-S

ISO 9001 REGISTERED FIRM

Electrical Specifications

Center Frequency: 225 MHz
Bandwidth: 30 MHz
Passband: 210-240 MHz
Insertion Loss: 0.8 dB Max
VSWR: 1.5:1 Max
Attenuation: >30 dB @ DC~200 MHz
>30 dB @ 250~1000 MHz
Impedance: 50 Ω
Input Power: 150 Watts


Mechanical

Connector Type: SMA (F)
Dimensions: 10.44 x 4.85 x 2.96 Inches

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C

Outline Drawing:

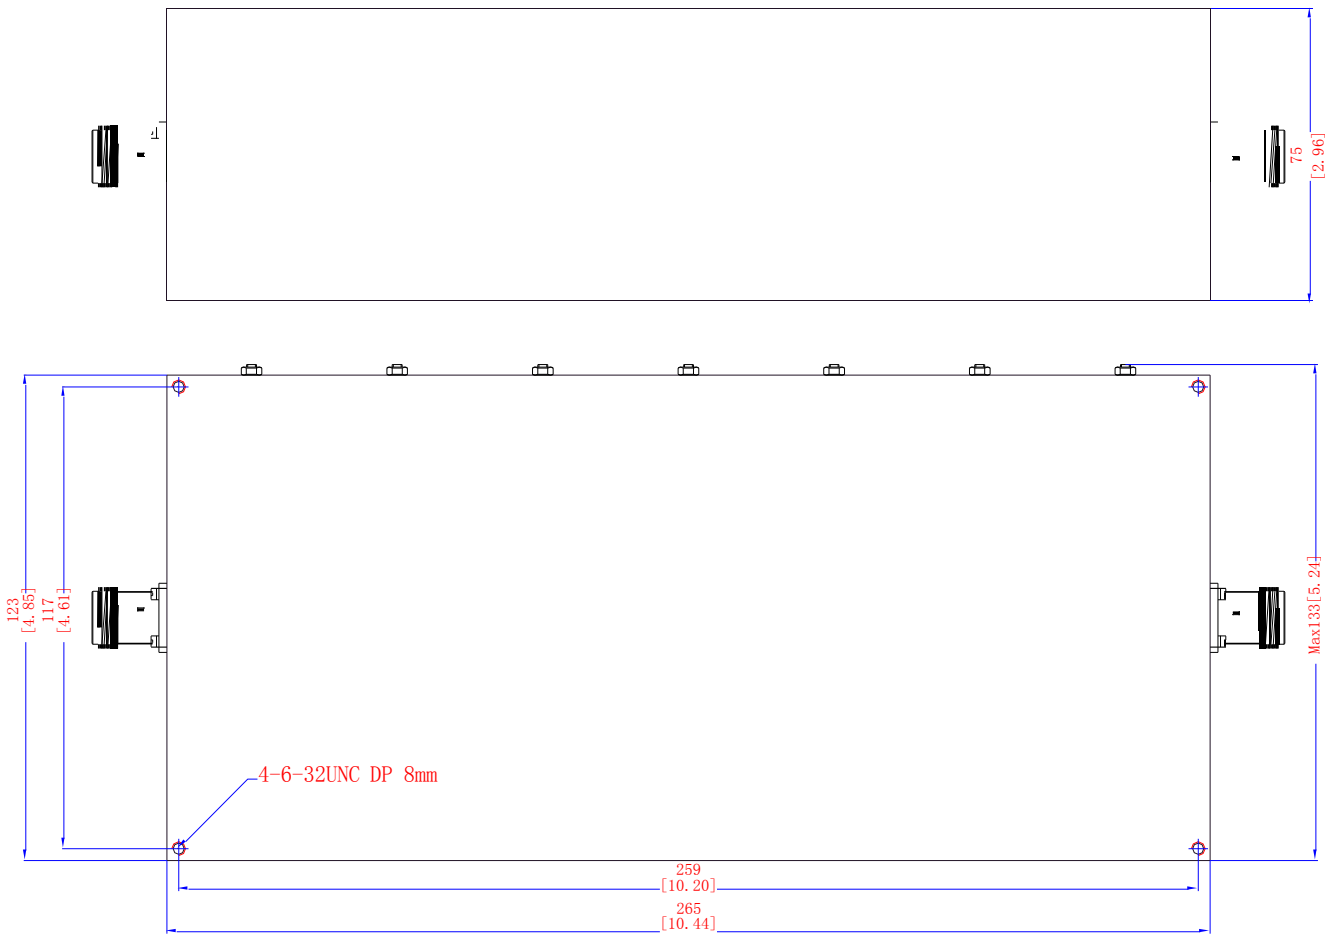

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com


ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

225 MHz Cavity Band Pass Filter

Part Number: AB225B1351-S

ISO 9001 REGISTERED FIRM

Response Plot:

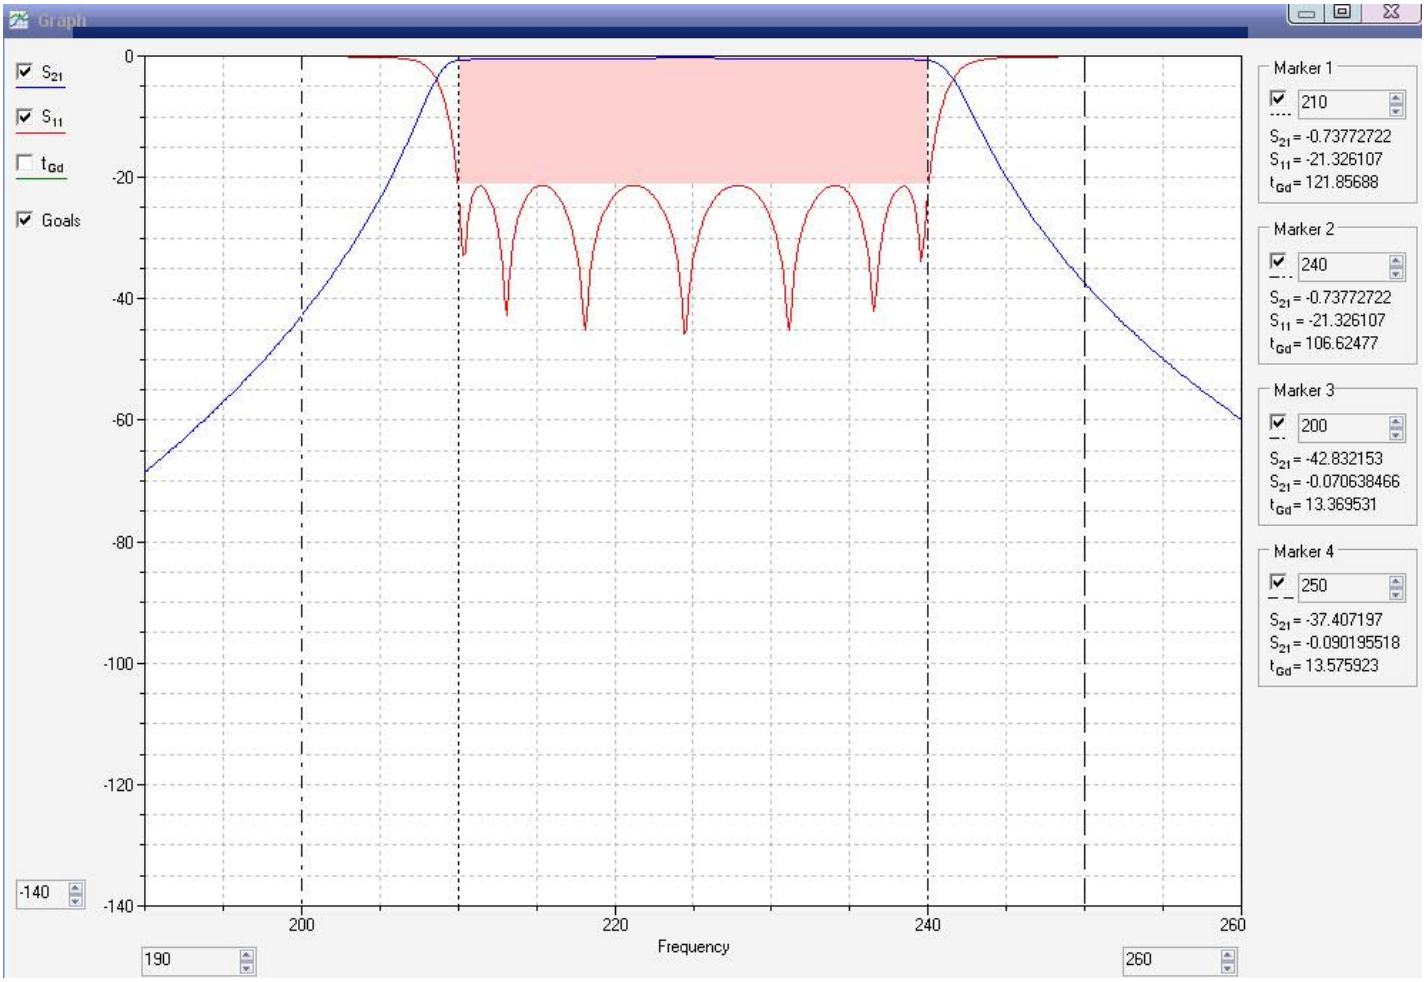

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com