ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2600 MHz Cavity Bandpass Filter

Part Number: AB2600B711

ISO 9001 REGISTERED FIRM

Electrical specifications

Center frequency (Fo): 2600 MHz
Insertion loss@Fo: =/<1.5 db
Ripple: =/<0.5 dB
Return loss@Fo: =/>15 dB
Rejection frequency on low side(Fs-): 2150 MHz
Rejection frequency on low side(Fs+): 3050 MHz
Attenuation at Fs-: =/>40 dB
Attenuation at Fs+: =/>40 dB


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA female
Dimensions: 2.32” x 2.16” x 1.42” in

Environmental

Operating Temperature: -45 to +85º C
Storage Temperature: -55 to +95º C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

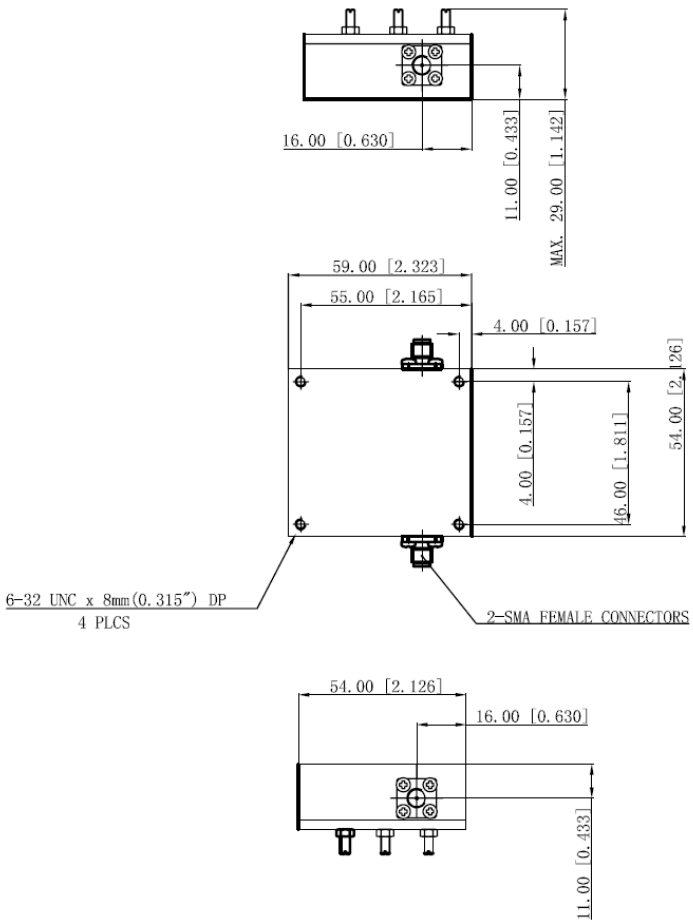

70 Outwater Lane
Garfield, NJ 07026
Phone: (973) 772-4242
Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com


ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2600 MHz Cavity Bandpass Filter

Part Number: AB2600B711

ISO 9001 REGISTERED FIRM

Plot:

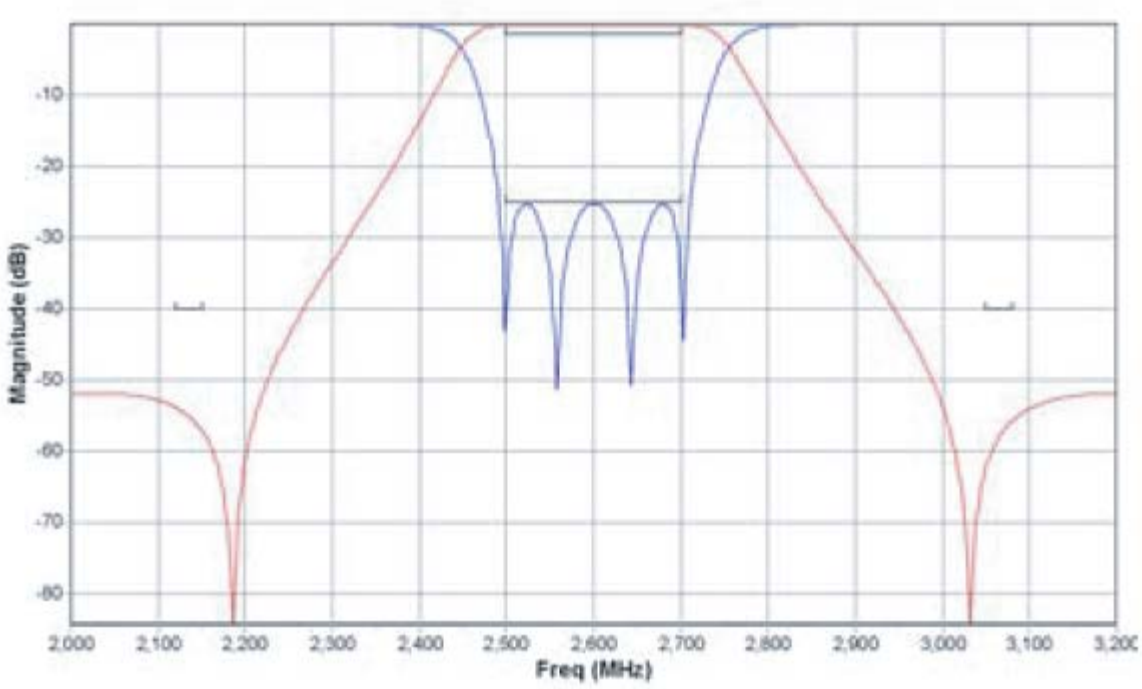

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com