ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

770 MHz Cavity Bandpass Filter

Part Number: AB770B844

ISO 9001 REGISTERED FIRM

Electrical specifications

Passband Frequency: 770 MHz
Equiripple Bandwidth: 12.3 MHz
Insertion Loss: ~2 dB
Stopband Attenuation 1: 50dBc@755 MHz
Stopband Attenuation 2: 50dBc@785 MHz
Power Handling: 50 W


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 4.72” X 2.36” X 1.96” in

Environmental

Operating Temperature: -45 to +85º C
Storage Temperature: -55 to +95º C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

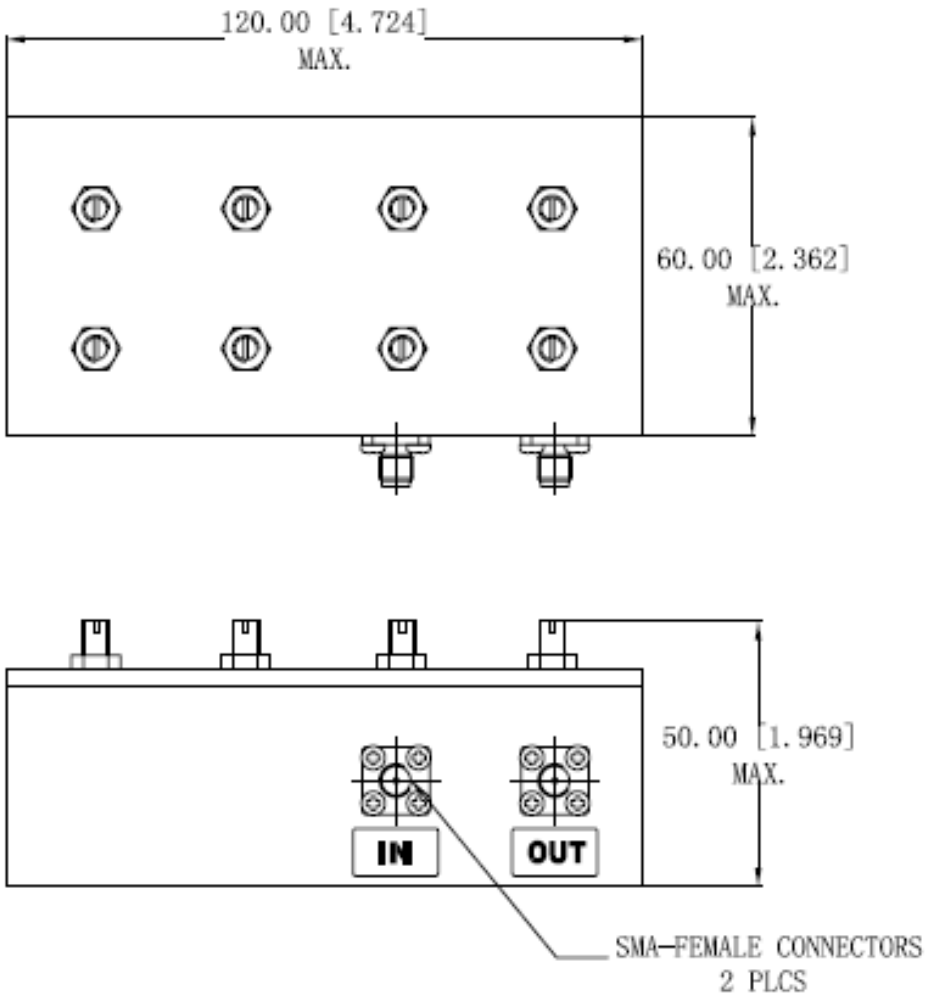

70 Outwater Lane
Garfield, NJ 07026
Phone: (973) 772-4242
Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com


ANATECH ELECTRONICS INC
RF & Microwave Filters & Products


770 MHz Cavity Bandpass Filter

Part Number: AB770B844

ISO 9001 REGISTERED FIRM

Plot:

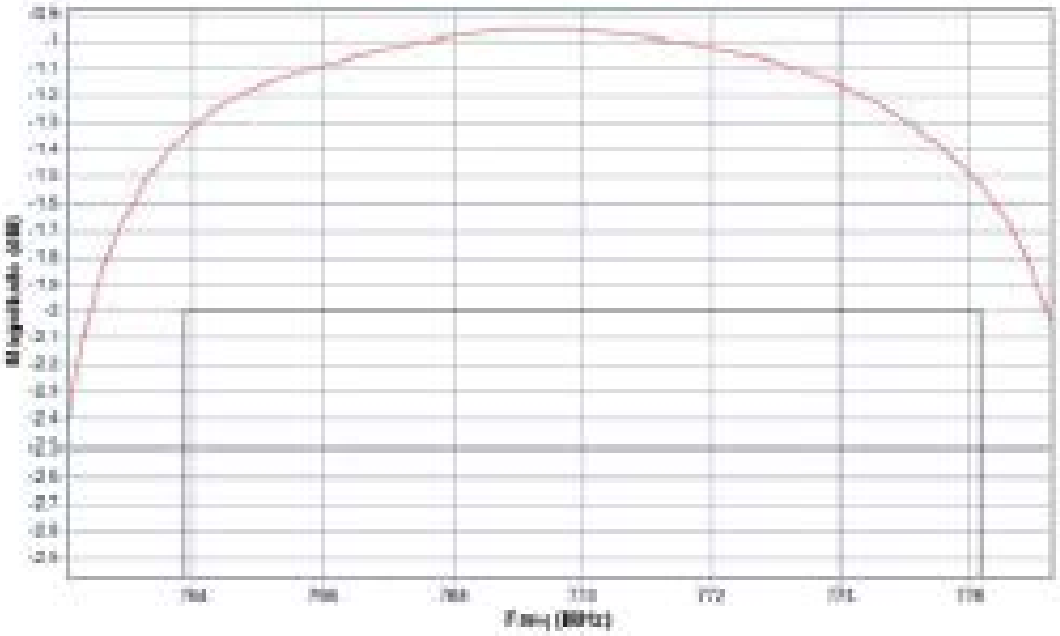

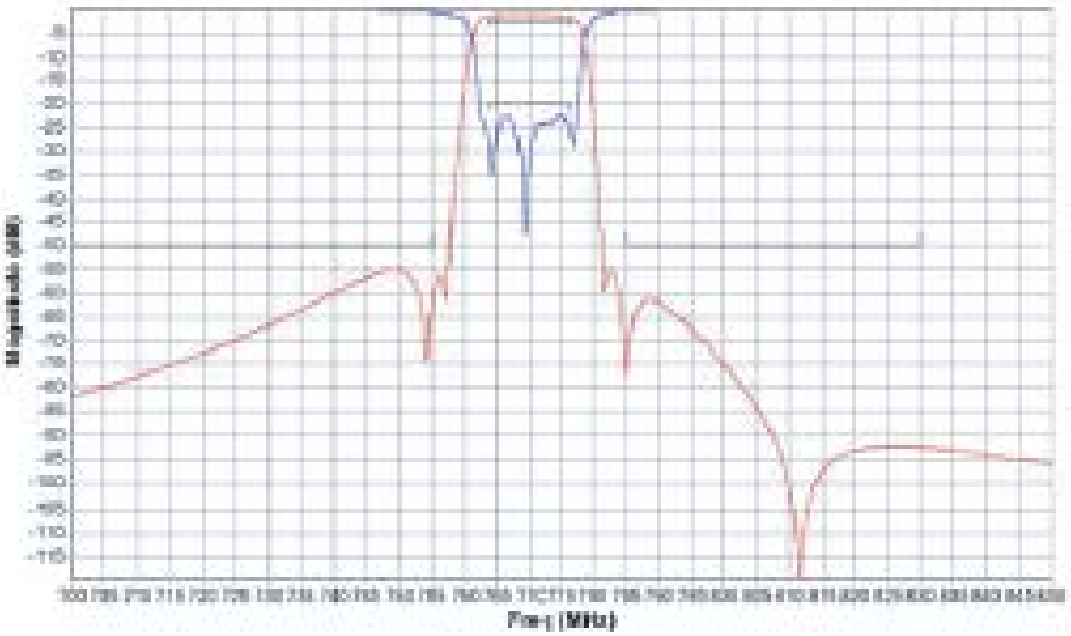

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com