


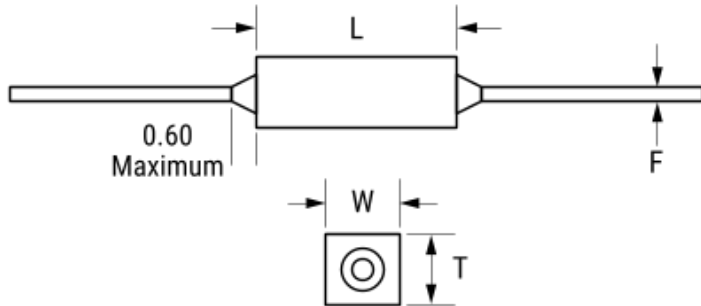

General Information

Series	ACA Indust COG HT200C
RoHS	No
Prop 65	⚠ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov .
Termination	Lead (SnPb)
Failure Rate	N/A
Testing and Reliability	MIL-PRF-20 Group A
Qualifications	MIL-PRF-20 Group A
AEC-Q200	No
Notes	Lead Length Shown Is For Parts Supplied In Bulk, See Packaging Specifications For Lead Lengths When Not Provided In Bulk.

Specifications

Capacitance	10 pF
Capacitance Tolerance	10%
Voltage DC	50 VDC
Dielectric Withstanding Voltage	125 VDC
Temperature Range	-55/+200°C
Temperature Coefficient	COG
Dissipation Factor	0.15% 1 MHz 1.0Vrms
Insulation Resistance	100 GOhms

Click [here](#) for the 3D model.

Dimensions

L	4.32mm MAX
W	2.03mm MAX
T	2.03mm MAX
LL	3.175mm MIN
F	0.508mm +/-0.051mm

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	1