



Component Specification

C03905

PC/104 and PC/104 Plus Connectors
November 2021

SECTION	TITLE	PAGE
1	Description of Connector and Intended Application	2
2	Ratings	2
Appendix 1	Press-fit plated through holes	4

1. DESCRIPTION OF CONNECTOR AND INTENDED APPLICATION

PC/104 and PC/104 Plus connectors are an industry-standard connector system used in PC/104 Embedded PC module stack applications. The PC/104 module stack is designed to use less space and at a lower cost than an equivalent backplane system, by utilising stackthrough connectors to interconnect PC boards within a stack. Standard height between module boards is 0.6" (15.24mm).

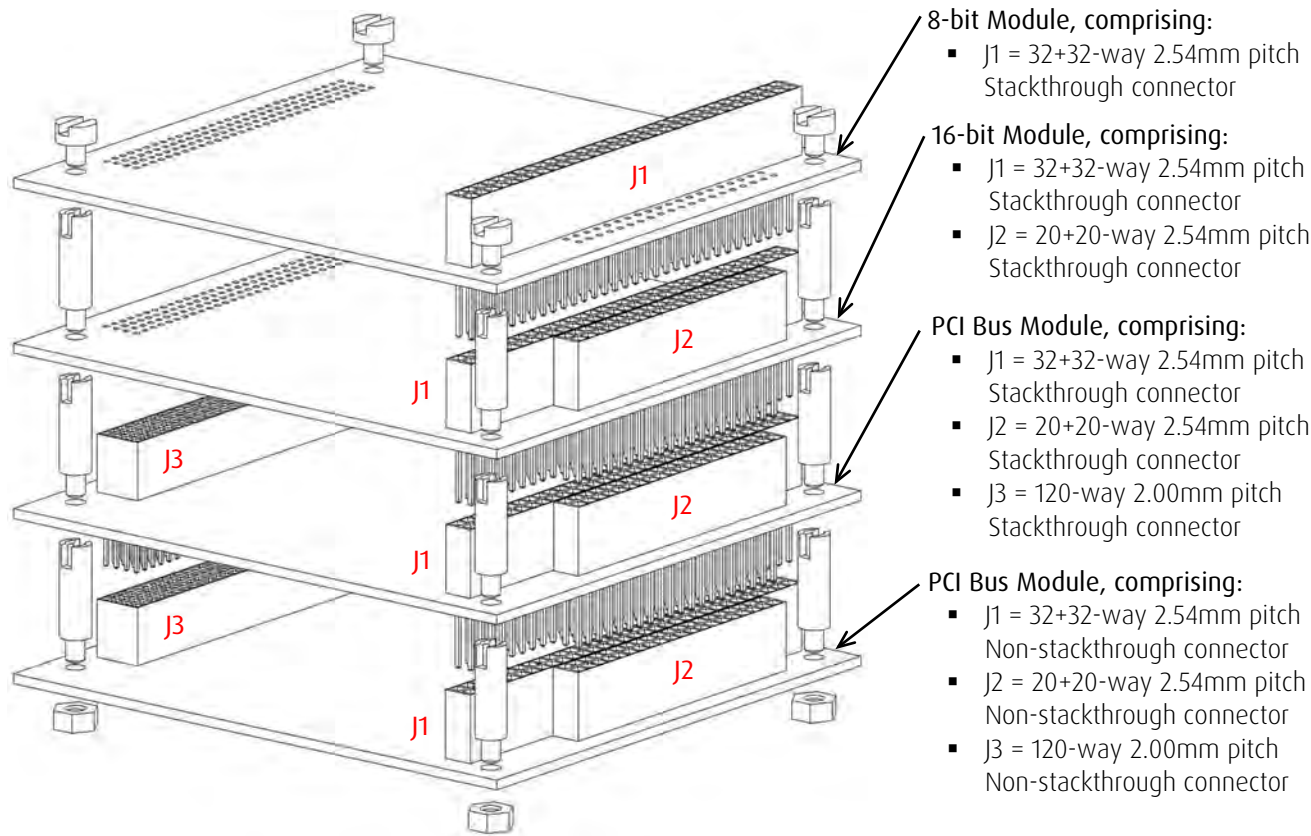


Figure 1 – PC/104 Stack

PC/104 connectors are 2.54mm pitch, either 32+32 or 20+20 ways. PC/104 Plus connectors are 2.00mm pitch, 4 x 30 (120) ways. The sockets have a tuning-fork style of contact. Solder or press-fit tail options are available, as are accessories for the range.

2. RATINGS

2.1. Materials

Housing:	
PC/104 Solder Tail connectors (M20)	Nylon 6T, UL94V-0, black
PC/104 Plus Solder Tail connectors (M22)	Nylon 6T, UL94V-0, black
Press-fit Tail connectors (M20/M22)	PPS, UL94V-0, black
PC/104 Plus Shroud (M22-604)	PBT, UL94V-0, black
Contact:	
Female	Phosphor Bronze
Male	Brass
Finish:	
Solder Tail connectors	0.08µ Gold over Nickel

Solder Tail header/socket (M22-602/603)	Gold flash over Nickel on contact area, tin on tails
Press-fit Tail connectors	0.25μ Gold over Nickel

2.2. Electrical Characteristics

Current (per contact through all contacts, 20°C ambient):	
PC/104 Solder Tail connectors (M20)	3A max
PC/104 Plus Solder Tail connectors (M22)	1A max
Press-fit Tail connectors (M20/M22)	1A max
Voltage Rating	12V DC
Dielectric Strength:	
PC/104 connectors (M20)	1,000V AC for 1 minute
PC/104 Plus connectors (M22)	800V AC for 1 minute
Contact Resistance:	
Initial	30mΩ max
After conditioning	50mΩ max
Insulation Resistance (1,000V AC for 1 minute)	5,000MΩmin

2.3. Environmental Characteristics

Temperature Range:	
PC/104 connectors (M20)	-55°C to +105°C
PC/104 Plus Solder Tail connectors (M22)	-55°C to +105°C
PC/104 Plus Press-Fit Tail connectors (M22-605/606)	-40°C to +85°C

2.4. Mechanical Characteristics

Durability of Mating Contacts	10 operations
Durability of Press-fit Section into PCB	3 operations
Contact Retention in Housing	5N min
Insertion Force (individual contact mating):	
PC/104 connectors (M20) with 0.64mm square gauge	2.0N max
PC/104 Plus Solder Tail connectors (M22) with 0.50mm square gauge	2.0N max
PC/104 Plus Press-Fit Tail connectors (M22-605/606) with 0.50mm square gauge	1.2N max
Withdrawal Force (individual contact mating):	
PC/104 connectors (M20) with 0.64mm square gauge	0.25N min
PC/104 Plus Solder Tail connectors (M22) with 0.50mm square gauge	0.3N min
PC/104 Plus Press-Fit Tail connectors (M22-605/606) with 0.50mm square gauge	0.2N min
Press-fit Insertion Force (to PCB):	
PC/104 – individual contact	80N max
PC/104 – 40-way connector	3,000N max
PC/104 – 64-way connector	4,000N max
PC/104 Plus – individual contact	59N max
PC/104 Plus – 120-way connector	7,840N max
Press-fit Withdrawal Force (to PCB):	
PC/104 – individual contact	20N min
PC/104 – 40-way connector	800N min
PC/104 – 64-way connector	1,280N min
PC/104 Plus – individual contact	15N min
PC/104 Plus – 120-way connector	1,764N min

APPENDIX 1 – PRESS FIT PLATED THROUGH HOLES**A1.1. PC/104 Connectors (M20 Series)**

- Drill hole in epoxy board to $\varnothing 1.15 \pm 0.02 \text{ mm}$.
- Plate hole with 25-75 μ Copper (150 Knoop max hardness), 3 μ min Nickel/Gold.
- Final plated hole diameter must be $\varnothing 1.09$ -1.00mm.

A1.2. PC/104 Plus Connectors (M22 Series)

- Drill hole in epoxy board to $\varnothing 1.000 \pm 0.025 \text{ mm}$.
- Plate hole with 25 μ min Copper (150 Knoop max hardness), 2.5-5.0 μ Nickel, 0.05-0.2 μ Gold.
- Final plated hole diameter must be $\varnothing 0.94$ -0.85mm.