

CGJ5H2X7R2A333K115AA

TDK Item Description : CGJ5H2X7R2A333KT****



Application & Main Feature

High Reliability Grade (Mid Voltage (100 to 630V))

Series

CGJ5(3216) [EIA CC1206]

Dimensions

L 3.20mm +/-0.2mm
W 1.60mm +/-0.2mm
T 1.15mm +/-0.15mm
B 0.20mm Min.
G 1.00mm Min.

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

2A (100Vdc)

Capacitance

33nF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor


3% Max.

Insulation Resistance


10Gohm Min.

AEC-Q200


Yes




DC Bias Characteristic

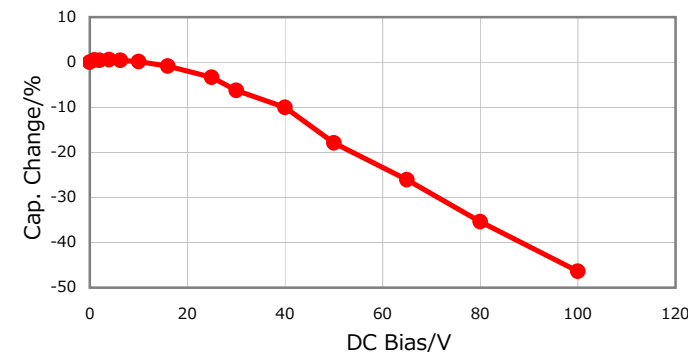


|Z|, ESR vs. Freq. Characteristics

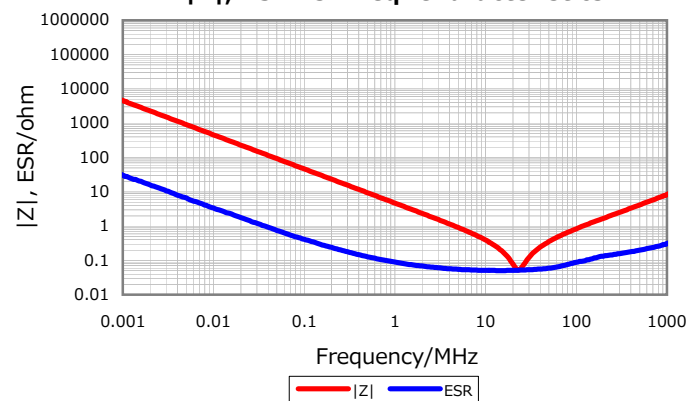


Temperature Characteristics

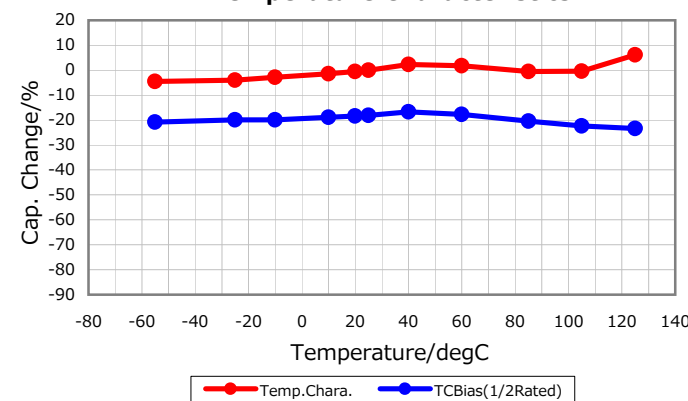

Cap. vs. Freq. Characteristic

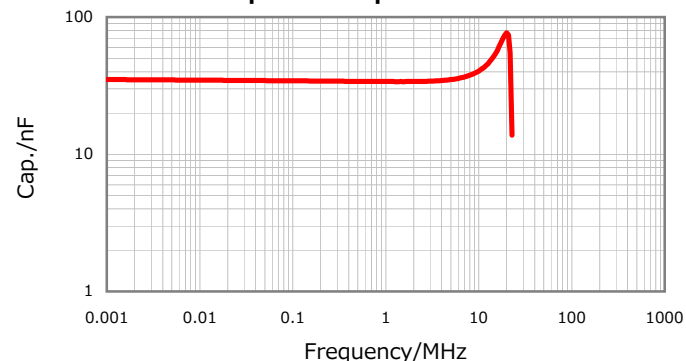

Ripple Temperature Rise Characteristics

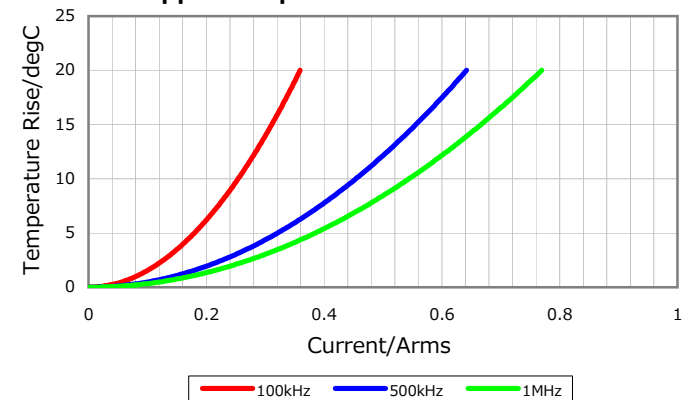

All specifications are subject to change without notice.

January 4, 2016