






Figure similar

Mechanically held lighting contactor, Contactor amp rating 20Amp 0NC _ 4NO poles, 208-240V 50/60HZ coil, Non-combination type, Enclosure NEMA type 12, Dust/drip proof for indoors

product brand name	Class CLM
design of the product	Mechanically held lighting contactor
special product feature	Energy efficient; Quiet operation
General technical data	
weight [lb]	8 lb
Height x Width x Depth [in]	16 × 13 × 6 in
touch protection against electrical shock	NA for enclosed products
installation altitude [ft] at height above sea level maximum	6560 ft
country of origin	USA
Contactor	
size of contactor	20 Amp
number of NO contacts for main contacts	4
number of NC contacts for main contacts	0
operating voltage for main current circuit at AC at 60 Hz maximum	600 V
contact rating of the main contacts of lighting contactor	
• at tungsten (1 pole per 1 phase) rated value	20A @250V 1p 1ph
• at tungsten (2 poles per 1 phase) rated value	20A @250V 2p 1ph
• at tungsten (3 poles per 3 phases) rated value	20A @250V 3p 3ph
• at ballast (1 pole per 1 phase) rated value	20A @347V 1p 1ph
• at ballast (2 poles per 1 phase) rated value	20A @600V 2p 1ph
• at ballast (3 poles per 3 phases) rated value	20A @600V 3p 3ph
• at resistive load (1 pole per 1 phase) rated value	30A @347V 1p 1ph
• at resistive load (2 poles per 1 phase) rated value	30A @600V 2p 1ph
• at resistive load (3 poles per 3 phases) rated value	30A @600V 3p 3ph
Auxiliary contact	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of total auxiliary contacts maximum	4
contact rating of auxiliary contacts of contactor according to UL	NA
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
• at AC at 50 Hz rated value	208 ... 240 V
• at AC at 60 Hz rated value	208 ... 240 V
apparent pick-up power of magnet coil at AC	600 VA
apparent holding power of magnet coil at AC	6 VA
operating range factor control supply voltage rated value of magnet coil	0.85 ... 1.1

Enclosure	
degree of protection NEMA rating of the enclosure	NEMA 12 enclosure
design of the housing	dustproof and drip-proof for indoor use
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf-in] for supply	18 ... 18 lbf-in
type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf-in] for load-side outgoing feeder	18 ... 18 lbf-in
type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf-in] at magnet coil	18 ... 18 lbf-in
type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	none
design of the short-circuit trip	Thermal magnetic circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	5 kA
• at 480 V	5 kA
• at 600 V	5 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No. 14
Further information	
Industrial Controls - Product Overview (Catalogs, Brochures,...)	
www.usa.siemens.com/ccatalog	
Industry Mall (Online ordering system)	
https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CLM2B04208	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	
https://support.industry.siemens.com/cs/US/en/ps/US2:CLM2B04208	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)	
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CLM2B04208&lang=en	
Certificates/approvals	
https://support.industry.siemens.com/cs/US/en/ps/US2:CLM2B04208/certificate	

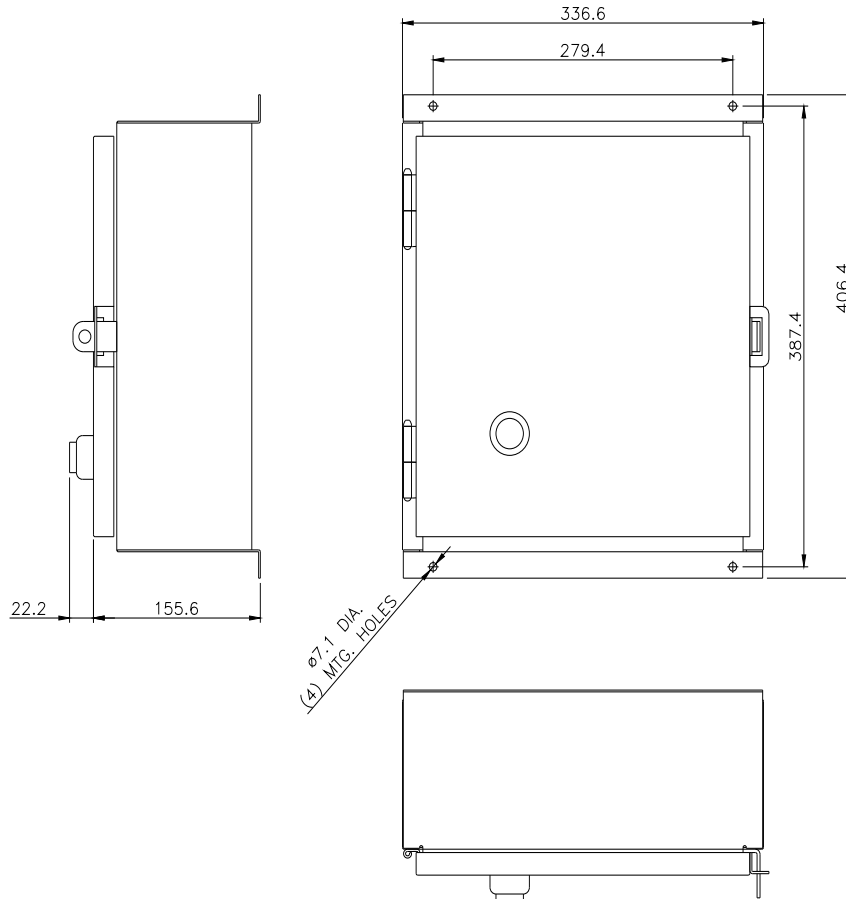

POLES	LOCATION
2	2, 8, 9
3	2, 8, 9, 10
4	2, 8, 4, 8, 9
6	1-6
8	1-6, 8, 9, 10, 11
10	1-6, 8, 9, 10, 11
12	1-12







ALTERNATE CONTACT RATING
ACC. CLAMPING (DEVT)
ACC. CLAMPING (DEVT)
24V AC
277 VAC
0.5A, 0.5VDC
0.5A, 0.5VDC

MAIN CONTACT MAXIMUM VOLTAGE BATTERY CONTROL OR CHARGE		
POLES TO LOAD	2 FOR 1	AMPERES CONTINUOUS
240 AC	240 AC	20
277 AC	277 AC	10
480 AC	480 AC	10
600 AC	600 AC	10

30 AMP. DC
GENERAL
250V DC MAX. 3 POLES IN SERIES

SWITCH IS SUITABLE FOR USE IN A CIRCUIT
CAPABLE OF DELIVERING NOT MORE THAN THE
RATED ELECTRICAL CURRENT AT THE MAXIMUM
VOLTAGE SHOWN BELOW. WHEN EXCEEDED BY
A 30 AMP. CIRCUIT BREAKER, THE SWITCH IS
DESIGNED TO WITHSTAND THE RATING OF NOT LESS THAN
VALUES SHOWN.

MAXIMUM TIME	MAXIMUM AC
AMPERES	VOLTS
25,000	250
10,000	480
10,000	600



MODULE TERMINAL	CONNECT TO
1	NOT USED
2	CONT. STATION FOR ACC. 48 & 49
3	CONT. STATION FOR ACC. 48 & 49
4	MODULE CONTROL VOLTAGE *
5	CONTACTOR CONTROL VOLTAGE
6	TERMINAL O OR CONTACTOR
7	TERMINAL C OR CONTACTOR

* FOR 24 VDC CONTROL MODULES
CONNECT TERMINAL 4 TO NEGATIVE (-)

- GENERAL NOTES
- VERIFY CONTACTOR & LINE VOLTAGE AND THE MAIN
CONTACTOR CONTROL VOLTAGE CAN BE DERIVED
FROM THE LINE POLS OF THE CONTACTOR SWITCH.
 - MAIN CONTACTOR ARE SHOWN IN OPEN POSITION WITH
CONTROL LINE DISCONNECTED. SEE FIG. 10 BELOW.
(SWITCH SHOWN WITH CONTACT CLOSED)
 - LINE & LOAD TERMINALS ARE REVERSIBLE.
 - CONTACTS ARE BREAK BEFORE POINTS BREAK WITH
MOMENTARILY INTERRUPTED SINGLE COIL OPERATOR
MECHANICALLY HELD IN BOTH OPEN & CLOSED POSITIONS.
 - TERMINAL CONNECTIONS TO LINE & LOAD WILL ACCEPT
30 AMP. TO 10 AMP. COVER WIRE, TORQUE LINE
POLE CONNECTION TO 18 IN. IN.
 - TERMINAL CONNECTIONS TO ELECTRIC MODULES (ACC.
48, 49, OR 49) WILL ACCEPT NO. 22 AWG TO 18 AWG
COVER WIRE, TORQUE CONTACT, TERMINALS TO 21 IN. IN.
 - CONTROL MODULE VOLTAGE SUPPLIED BY CUSTOMER.

24306100401

last modified:

1/25/2022

