
Sep.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

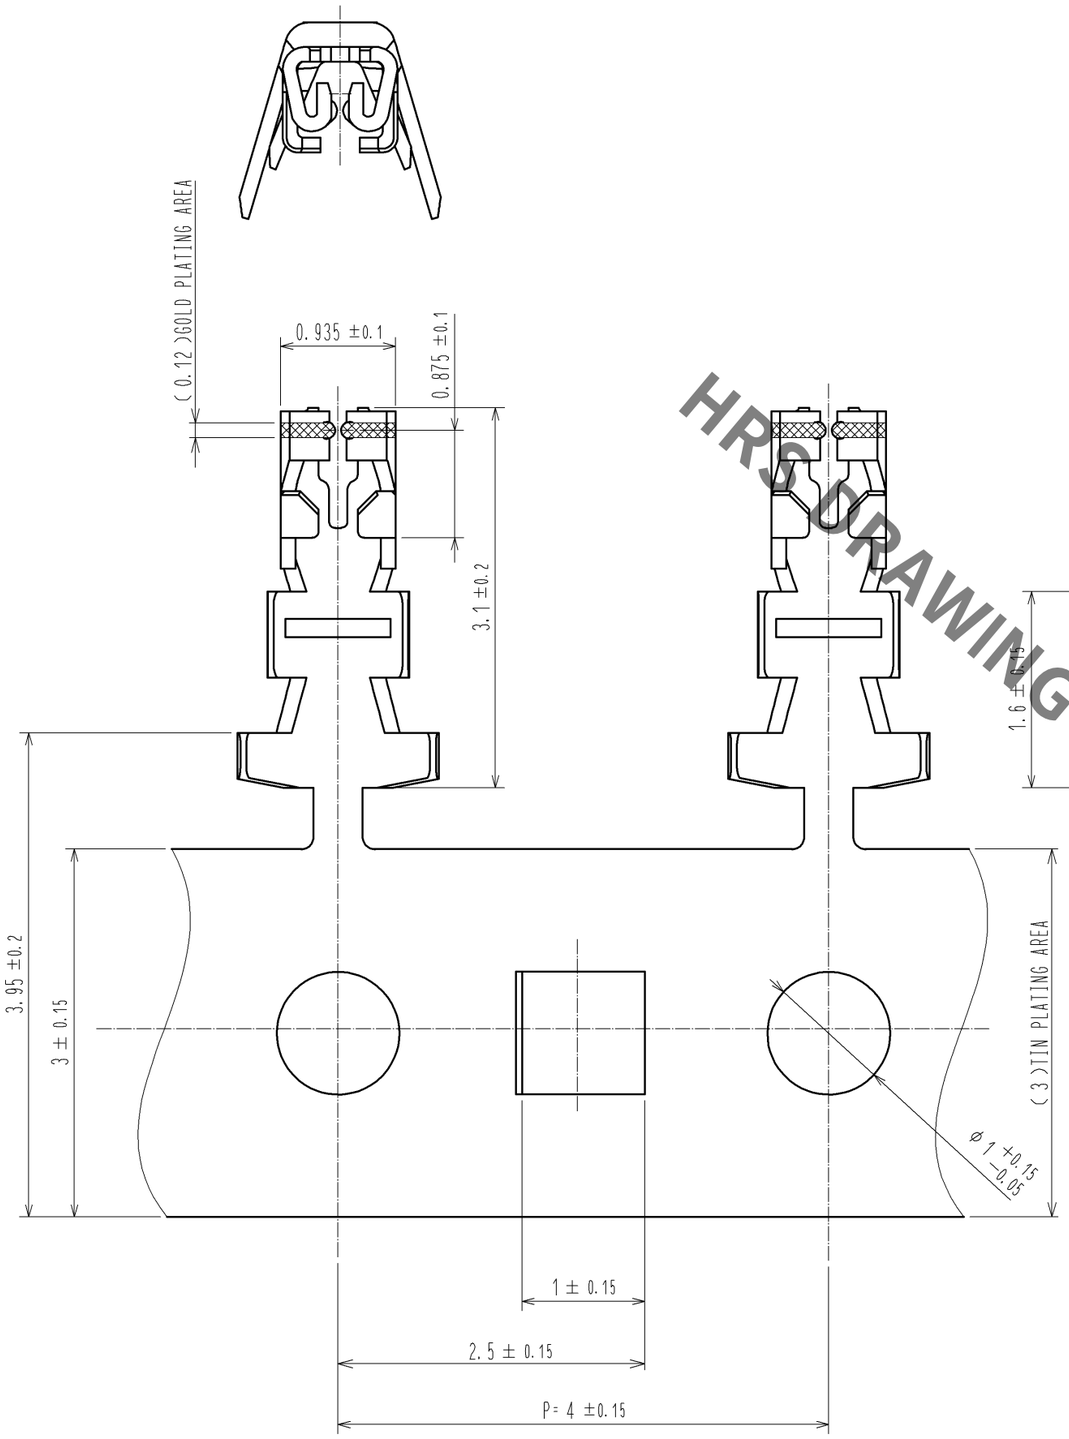



5 FIGURE OF INSERTION


HORIZONTALLY ○

DF57A-*S-1.2C
DF57AH-*S-1.2C


DF57-2628SCFA(41)



DIAGONAL ×

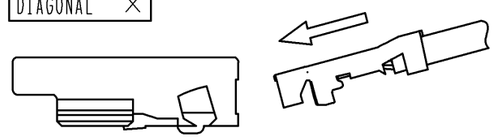


2 STYLE AND DIMENSION OF BOX

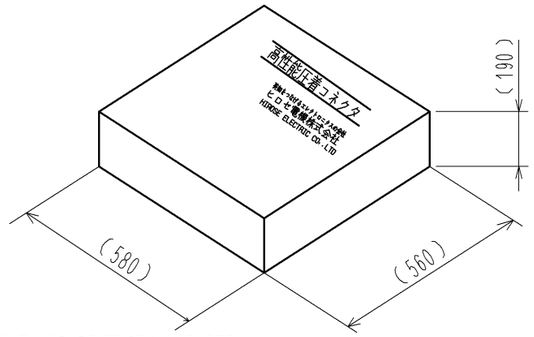


2 STYLE AND DIMENSION OF REEL

PART No.
LABEL

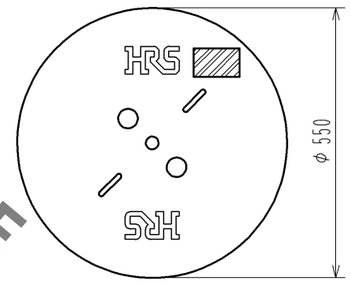


DETAIL OF PART No. LABEL

| HRS | 検査 |
|---|---|
| 品名コード | CL666-0033-0-41 |
| 品名 | DF57-2628SCFA(41) |
| 数量 | 35000 |
| 仕様 | |
| LOT No. | |
| 継ぎ目 | |

SECTION
Lot No.
SPECIFICATION
QUANTITY
PART No.
CODE No.

NOTE 1. 1RL:35000 CONTACTS.
2 STYLE OF REEL AND BOX SHOWS IN FIGURE.
3. A MAXIMUM OF 5 REELS ARE PACKED UP IN ONE BOX.
4. PLEASE BE SURE TO CHECK THE FORM OF CRIMPING USING A CABLE. WHEN YOU ADJUST APPLICATOR.
5 AVOID ANGLED INSERTION OF CRIMP CONTACT(DF57-2628SCFA(41)) TO MAINTAIN PERFORMANCE RELIABILITY.

| NO. | MATERIAL | FINISH , REMARKS |
|---|---|---|
| 1 | PHOSPHOR BRONZE | CONTACT AREA:GOLD PLATING 0.2μmMIN<br>CARRIER AREA:TIN PLATING 1μmMIN<br>UNDER AREA:NICKEL PLATING 2μmMIN |

| UNITS | SCALE | COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE |
|---|---|---|---|---|---|---|
| mm | 20: 1 | △ | | | | |

HIROSE ELECTRIC CO., LTD.

| | | |
|---|---|---|
| APPROVED | KI. AKIYAMA | 12.11.17 |
| CHECKED | HK. UMEHARA | 12.11.17 |
| DESIGNED | TS. KUMAZAWA | 12.11.16 |
| DRAWN | MI. SAKIMURA | 12.11.15 |

| | |
|---|---|
| DRAWING NO. | EDC3-342636-01 |
| PART NO. | DF57-2628SCFA(41) |
| CODE NO. | CL666-0033-0-41 |

△ 1/1