
EBC112

Y-splitter

ZDO2F030MSS0000-00STGH040MSS

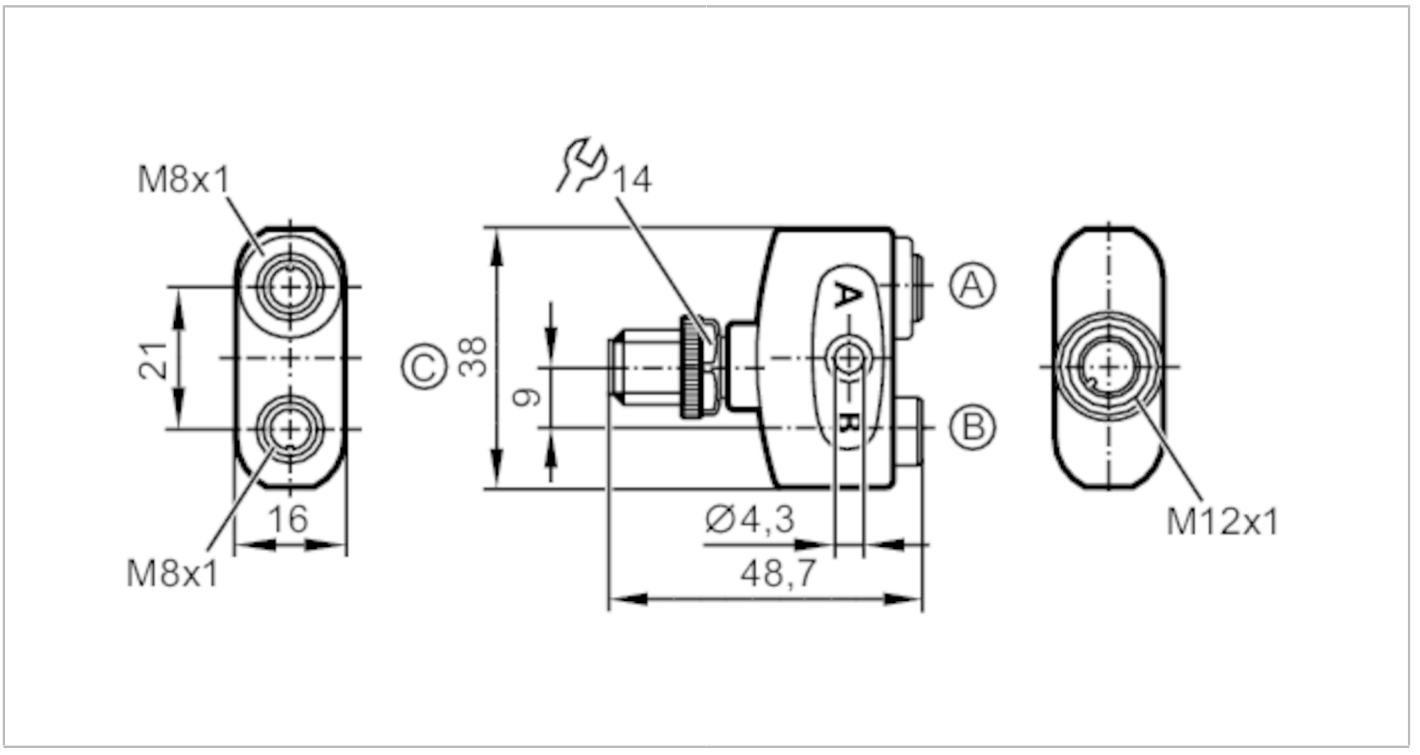

Application			
Special feature		Free from silicone; Gold-plated contacts	
Free from silicone		yes	
Electrical data			
Operating voltage	[V]	< 50 AC / < 60 DC; (cULus: 30 AC / 42 DC)	
Protection class		III	
Max. current load total	[A]	3	
Operating conditions			
Ambient temperature	[°C]	-25...90	
Note on ambient temperature		cULus: ...65 °C	
Protection		IP 65; IP 67; IP 68; IP 69K	
Tests / approvals			
UL approval		power supply	Class 2
		File number UL	E191684
Mechanical data			
Weight	[g]	30.2	
Materials		housing: PA orange; Sealing: FKM	
Material nut		brass, nickel-plated	
Remarks			
Pack quantity		1 pcs.	
Electrical connection - plug			

Connector: 1 x M12; coding: A; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm

EBC112


Y-splitter

ZDO2F030MSS0000-00STGH040MSS



Electrical connection

Connection

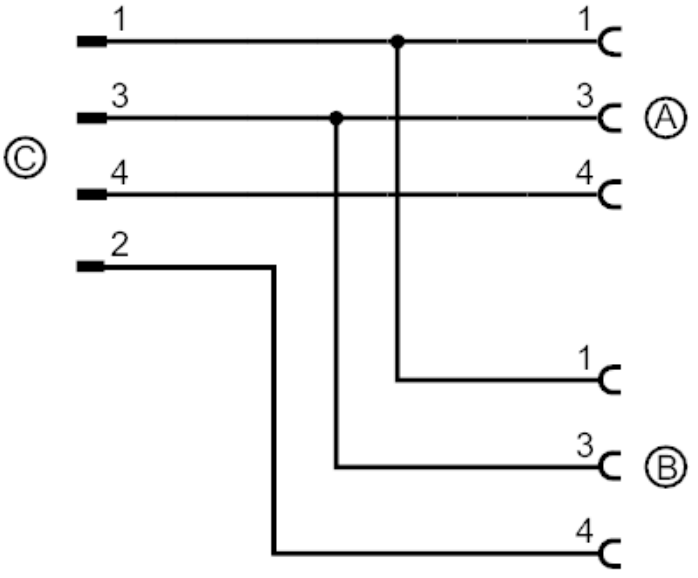

Electrical connection - socket

Connector: 2 x M8; coding: A; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.3...0.5 Nm

