

HDP24-24-23SN-L015

✓ ACTIVE

DEUTSCH | DEUTSCH HD, DEUTSCH HDP

TE Internal #: HDP24-24-23SN-L015

Housing for Female Terminals, Wire-to-Wire, 23 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C]

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings



Connector & Housing Type: **Housing for Female Terminals**

Mating Pin Diameter: **1.59 mm [.063 in]**

Connector System: **Wire-to-Wire**

Number of Positions: **23**

Sealable: **Yes**

[All DEUTSCH HDP20 Housings \(324\)](#)

Features

Product Type Features

Connector Shape	Circular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Contact Retainer
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Connector Modification	Threaded Adapter
Connector Seal Code	N Seal
Number of Positions	23



Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black

Contact Features

Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A

Mechanical Attachment

Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Guide Post
Mating Alignment	With
Connector Mounting Type	Panel Mount

Housing Features

Housing Material	PA GF
------------------	-------

Dimensions

Connector Height	47.63 mm[1.875 in]
Product Width	50.8 mm[2 in]
Product Length	58.67 mm[2.31 in]
Accepts Insulation Diameter Range	2.54 – 3.4 mm[.1 – .134 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Degree of Protection	IP67
UL Flammability Rating	20mm Flame Test per Standard UL-94



Packaging Features

Packaging Method	Box
------------------	-----

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

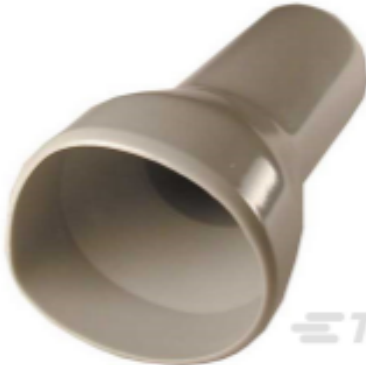


 TE Part # CAT-H3910-B128 DEUTSCH HD10 Backshells	 TE Part # CAT-H396-RC8382 Receptacle Protective Caps — DEUTSCH HDP20	 TE Part # CAT-D48-SP729 DEUTSCH Sealing Plugs	 TE Part # CAT-H396-CH8172 DEUTSCH HDP20 Housings
 TE Part # 0411-291-1405 EXT TOOL, SIZE 16, 14-16 AWG, N, GRN	 TE Part # 0411-204-1605 EXT TOOL, SIZE 16, 16-18 AWG, N, DRK BLU	 TE Part # 16-04477 GASKET, 24SZ, BLK, HD30	 TE Part # HD30-24BT BOOT, 24SZ, ST, GRY
 TE Part # CAT-H396-B128 DEUTSCH HDP20 Backshells	 TE Part # 24-D-PUNCH D-HOLE PUNCH, SIZE 24	 TE Part # HD30-24BT-BK BOOT, 24SZ, ST, BLK	 TE Part # HD30-24BT-90-BK BOOT, 24SZ, RA, BLK
 TE Part # 62036-40 62036 HDP24 FLANGE-SEAL silicone 60shore			

Also in the Series | **DEUTSCH HD**

 Automotive Connector Caps & Covers (64)	 Automotive Housings(740)	 Automotive Seals & Cavity Plugs(10)	 Insertion & Extraction Tools(11)
--	---	--	---



Other Automotive Connector Accessories(11)

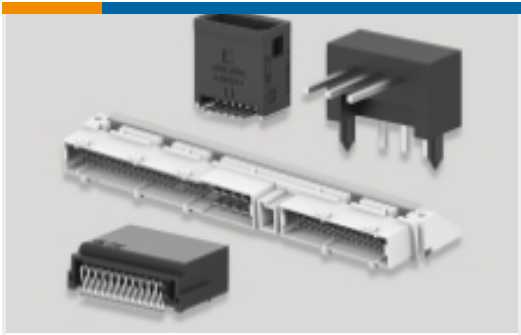

PCB Headers & Receptacles(1)

Also in the Series

DEUTSCH HDP



Automotive Connector Caps & Covers (12)



Automotive Housings(331)



Automotive Seals & Cavity Plugs(1)



Insertion & Extraction Tools(11)



Other Automotive Connector Accessories(5)

Customers Also Bought



TE Part #M902-2054
COMP NUT, 6/9/24SZ,CBL SZ .570-.710,HD10



TE Part #HDP26-24-23PE-L015
PLG, 23P, BLK, E, THD, 16, P



TE Part #1623927-8
CFR16 5% 120R



TE Part #DRC26-50S03
DEUTSCH DRC Housings



TE Part #M902-2243
DEUTSCH HDP20 Backshells



TE Part #2411-001-2405
PANEL NUT, SIZE 24, HDP



TE Part #1416010-1
V23132A2001B200



TE Part #1062-12-0222
SOC, SF, SIZE 12, 10, NI/NI



Documents

Product Drawings

REC, 23P, BLK, N, THD, 16, S

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_HDP24-24-23SN-L015_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_HDP24-24-23SN-L015_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_HDP24-24-23SN-L015_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English