

IN24-5RD

Rubber duck Omni Antenna

2.4 GHZ APXTENDER RUBBER DUCK ANTENNA

The 5.5 dBi APXtender indoor rubber duck omnidirectional antenna is used to extend the range of indoor access points or client bridges in 802.11 2.4GHz wireless LAN environments. The antenna features a 360 horizontal transmission pattern and a 50 vertical transmission pattern. The transmit/receive element can be tilted in relation to the base to direct signal where it is needed (0 , 45 , 90). The antennas are available in various connectors to fit most wireless radio equipment.

FEATURES AND BENEFITS

- 5.5 dBi gain 2.4 GHz omnidirectional indoor antenna
- Direct replacement for 2.2 dBi rubber duck antenna that is standard on most indoor access points and bridges
- Extends range of 2.4 GHz wireless access points or wireless bridges
- Improved detent for better position stability
- Improved more rugged construction
- Improved more flexible radome
- Improved temperature operation range to 70°C
- Improved styling


MARKETS

- 2.4 GHz wireless access points
- 2.4 GHz wireless routers
- 2.4 GHz wireless client bridges
- 2.4 GHz wireless equipment

ORDERING INFO

PARAMETER	
Frequency range	2400 - 2485 mHz
Gain	5.5 dBi
VSWR	1.5:1
Impedance	50 ohm
Input power	10 watts
Operating temperature	-10° to +70°C
Weight	1.2 oz (34 g)
Dimension (Height x Dia)	8.07" x 0.57"D (205 mm x 14.5 mm D)

ANTENNA PATTERNS

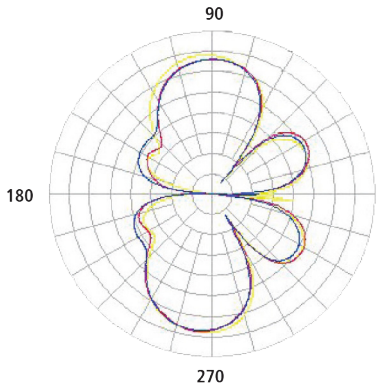

E-Plane

SYSTEM ORDERING

IN24-5RD-SmA 5.5 dBi 2.4 GHz APXtender – SmA male Connector
IN24-5RD-RSmA 5.5 dBi 2.4 GHz APXtender – Reverse Polarity SmA Connector (Dlink, smartBridges, etc)
IN24-5RD-RTNC 5.5 dBi 2.4 GHz APXtender – Reverse Polarity TNC Connector (Linksys, Cisco, etc)

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2021 TE Connectivity. All Rights Reserved.

12/21 Original