
# NBL15602S

Aliases (UPCNBL15602S00)

KEMET, NBL, Transducers, Single-layer

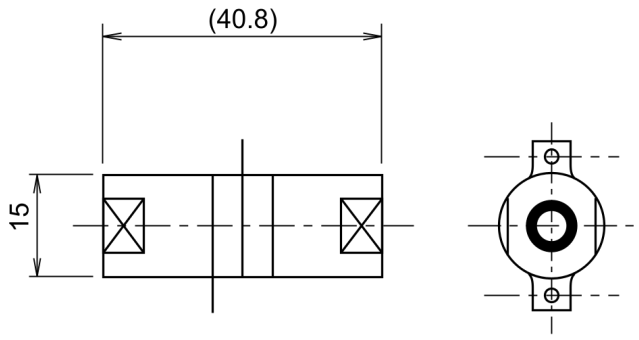


Click here for the 3D model.

| General Information | |
|---|---|
| Style | Bolt-On |
| Description | Langevin Bolt-On Transducers |
| RoHS | With Exemptions |
| SCIP Number | 6629125f-50d3-4e75-ae76-25e0bc1955b0 |
| Notes | Straight Construction. |

| Specifications | |
|---|---|
| Series | NBL |
| Capacitance | 850 pF |
| Resonant Frequency | 60 kHz |
| Dynamic Admittance | 25msec |
| Mechanical Q | 500 Qm |
| Allowable Velocity | 50 cm/S |
| Allowable Power | 2.5 |
| Temperature Range | -40/+120°C |

| Dimensions | |
|---|---|
| D | 15mm NOM |
| L | 40.8mm NOM |

| Packaging Specifications | |
|---|---|
| Component Weight | 30 |
| Packaging | Bulk Tray, Box |
| Packaging Quantity | 160 |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



© 2006 - 2022 KEMET