This product is not orderable anymore. Please contact your local distribution partner.

Pushing Performance
Since 1945

Han3A RJ45 Hybrid Cat5 PFT 8+4p plastic

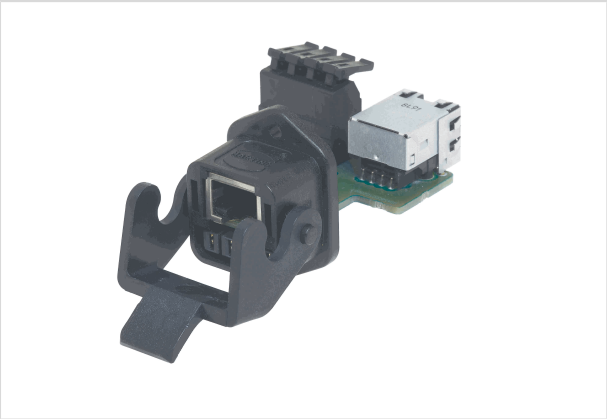


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 225 1300
Specification	Han3A RJ45 Hybrid Cat5 PFT 8+4p plastic
HARTING eCatalogue	https://b2b.harting.com/09452251300

Identification

Category	Connectors
Series	RJ45 Hybrid
Element	Panel feed through
Specification	Straight

Version

Size	Han® 3 A
Shielding	Fully shielded, 360° shielding contact
Number of contacts	8
further contacts	4x 48 V

Technical characteristics

Transmission characteristics	Cat. 5 Class D up to 100 MHz
Data rate	10 Mbit/s 100 Mbit/s 1 Gbit/s 2.5 Gbit/s
Limiting temperature	-40 ... +70 °C
Mating cycles	≥500

Material properties

Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	Black
RoHS	compliant

HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com

Pushing Performance
Since 1945

Material properties

ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Naphthalene

Specifications and approvals

Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079
PROFINET	Yes

Commercial data

Packaging size	1
Net weight	44.5 g
Country of origin	Romania
European customs tariff number	85366990
GTIN	5713140059801
eCl@ss	27440101 Rectangular connectors (set)

HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com