This product is not orderable anymore. Please contact your local distribution partner.

Pushing Performance
Since 1945

HPP V4 Hybrid C-PFT set 4+3p, RJ45+T

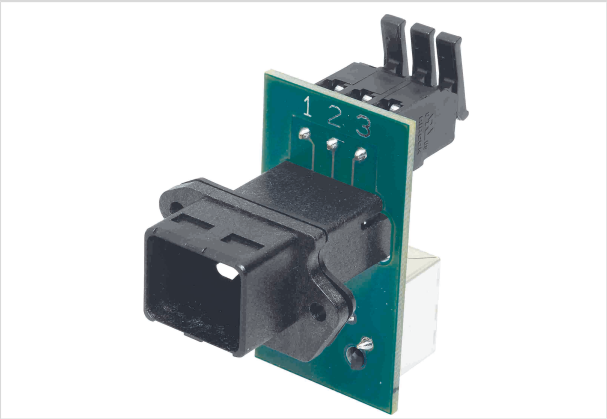


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 245 1320
Specification	HPP V4 Hybrid C-PFT set 4+3p, RJ45+T
HARTING eCatalogue	https://b2b.harting.com/09452451320

Identification

Category	Connectors
Series	HARTING PushPull (V4)
Type of hood/housing	Bulkhead mounted housing
Description of hood/housing	Straight

Version

Locking type	PushPull

Technical characteristics

Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP65 IP67

Material properties

Material (hood/housing)	Thermoplastic
Colour (hood/housing)	Black
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes

HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com

Pushing Performance
Since 1945

Material properties

REACH SVHC substances	6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol

Specifications and approvals

Specifications	IEC 61076-3-106 Variant 4 (V4)

Commercial data

Packaging size	1
Net weight	24 g
Country of origin	Germany
European customs tariff number	85340090
GTIN	5713140059863
eCl@ss	27440202 Shell for industrial connectors

HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com