

Oct.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

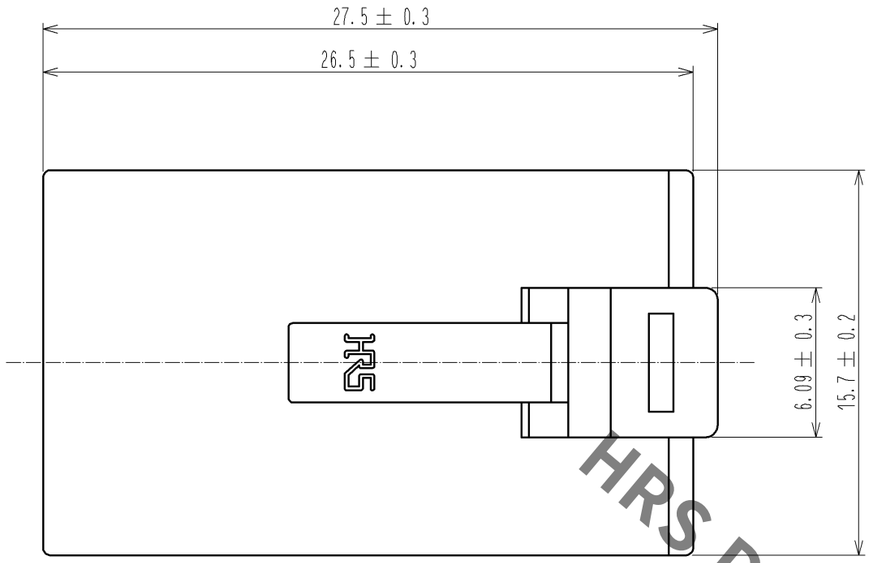


GUIDE PLATE (2:1)




1 TABLE-1


APPLICABLE CABLE CONSTRUCTION

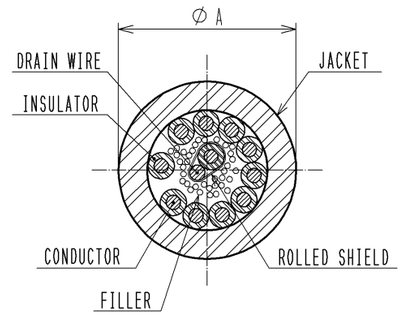


JACKET [ϕAmm]	8 AND 10 LINES ϕ5.2 mm ※1	12 LINES ϕ6.2 mm ※1
INSULATOR	ϕ0.9～1.0 mm	
CONDUCTOR	QUADRUPLE COPPER FOIL ※2	
DRAIN WIRE	19 CONDUCTORS/ϕ0.12 ※2	
JACKET CLAMP POSITION	SHOWN IN CABLE ASSEMBLED IMAGE	


※1 OUTSIDE DIMENSION OF JACKET SHOULD BE ϕ5.5～6.2 mm.
※2 CONDUCTOR AND DRAIN WIRE FOR REFFERENCE.

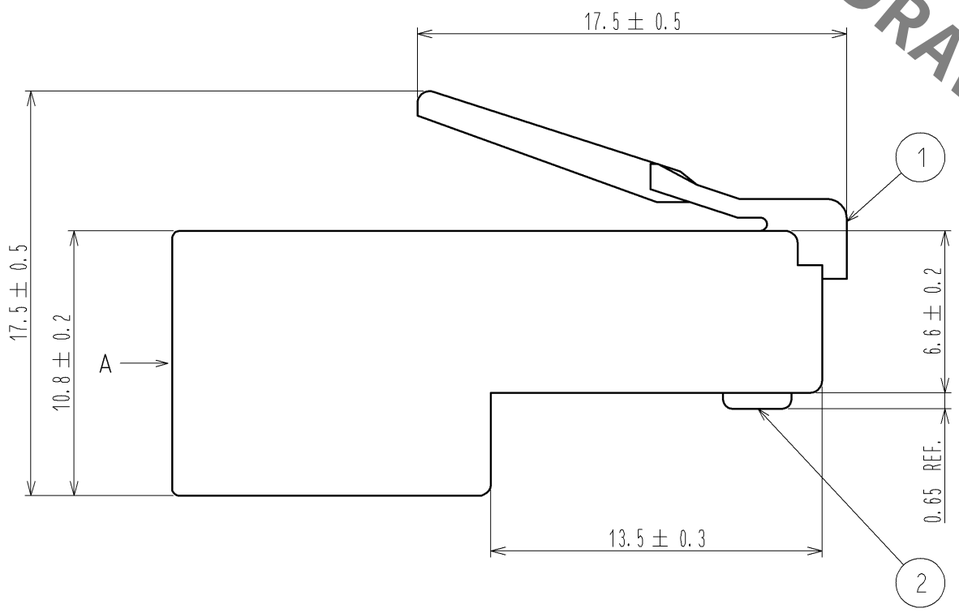


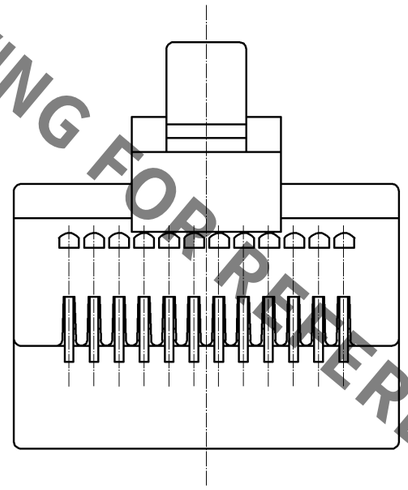

CABLE ASSEMBLED IMAGE

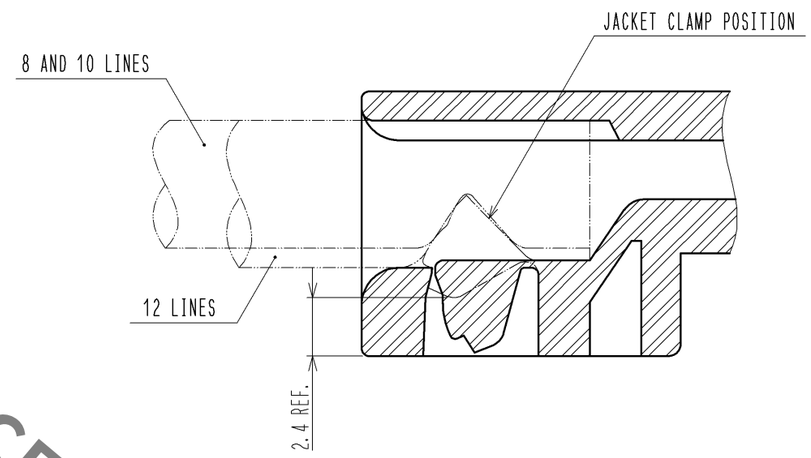

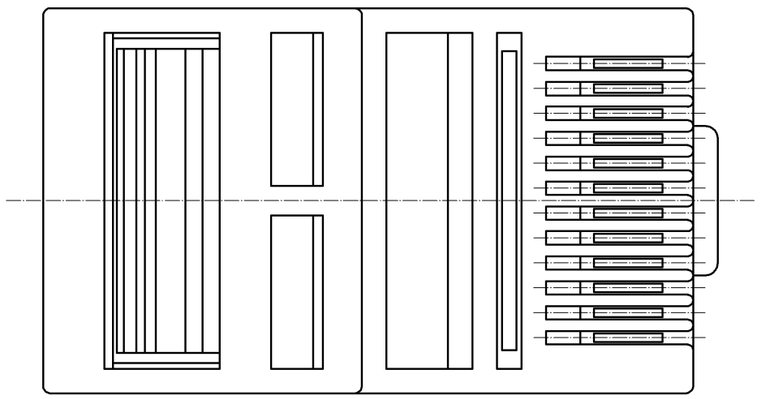

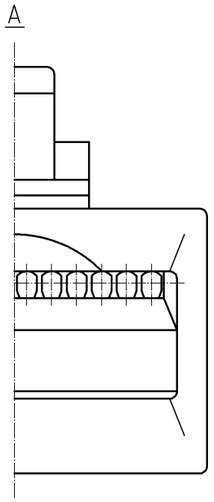

NOTES 1 APPLICABLE CABLE IS SHOWN IN TABLE-1.
2 PLEASE USE ACCESSORY AS A GUIDE PLATE AND ASSEMBLE CONNECTOR WITH CABLE INSERTING ACCESSORY INTO CONNECTER.

NO.	MATERIAL	FINISH , REMARKS
1	PBT	WHITE
2	PHOSPHOR BRONZE	CONTACT:GOLD PLATING 1μm min. LEAD :GOLD PLATING 0.05μm min. UNDER :NICKEL PLATING 2μm min.
3	POLYCARBONATE	UL94HB CLEAR

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	4 : 1	△					

HIROSE ELECTRIC CO., LTD.

APPROVED	RI. TAKAYASU	10. 07. 16
CHECKED	YH. ENAMI	10. 07. 16
DESIGNED	KI. NAGANUMA	10. 07. 16
DRAWN	KK. TOKUNAGA	10. 07. 15

DRAWING NO.	EDC3-120162-00
PART NO.	TM40P-1212P
CODE NO.	CL222-2715-4-00

△ 1/1