

General Description

The TMR2103 linear sensor utilizes a unique push-pull Wheatstone bridge composed of four unshielded TMR sensor elements. The unique bridge design provides a high sensitivity differential output that is linearly proportional to a magnetic field applied parallel to the surface of the sensor package, and it provides superior temperature compensation of the output. The TMR2103 is available in two packaging form factors: SOP8 6mm X 5mm X 1.5mm (P/N TMR2103P), or DFN8 3mm X 3mm X 0.75mm (P/N TMR2103D).

Features and Benefits

- Tunneling Magneto resistance (TMR) Technology
- High Sensitivity
- Large Dynamic Range
- Very Low Power Consumption
- Excellent Thermal Stability
- Very Low Hysteresis
- Compatible with Wide Range of Supply Voltages

Applications



- Magnetic Field Sensing
- Current Sensors
- Industrial Flow Meters
- Displacement Sensing
- Rotary Position Sensors



TMR2103


Transfer Curve

The following figure shows the response of the TMR2103 to an applied magnetic field in the range of ± 30 Oe (left) and ± 200 Oe (right) when the TMR2103 is biased at 1 V. At low fields the TMR2103 response is highly linear, and it is not harmed when the sensor is driven into saturation.

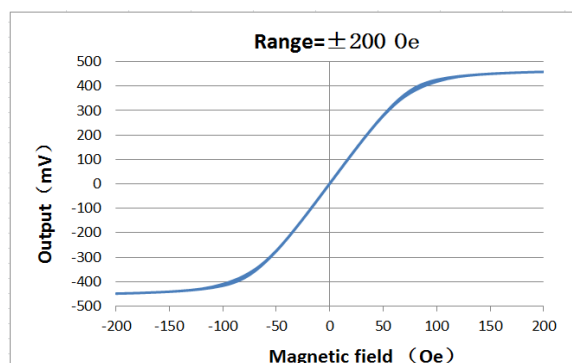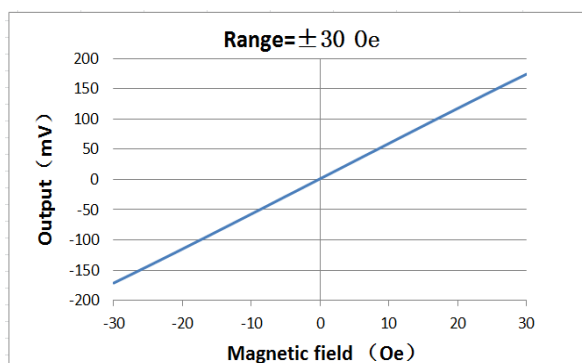

Pin Configuration

(Arrow indicates direction of applied field that generates a positive output voltage.)

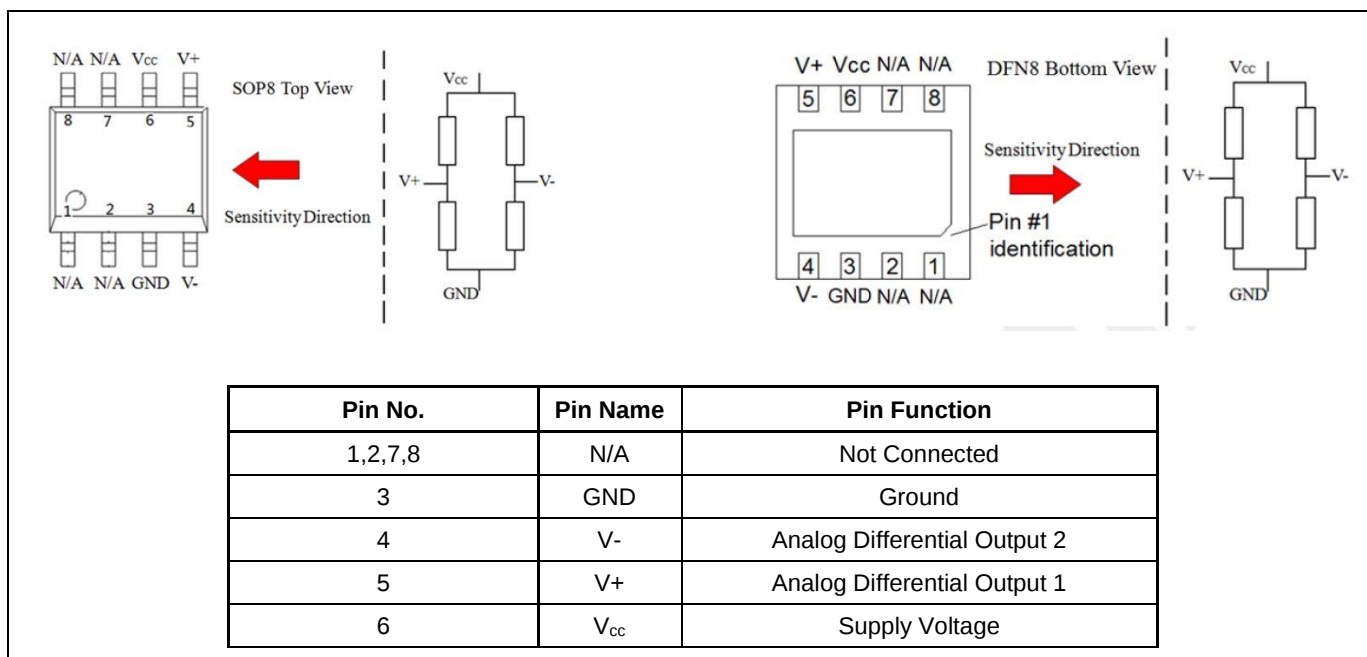

Absolute Maximum Ratings

Parameter	Symbol	Limit	Unit
Supply Voltage	V _{CC}	7	V
Reverse Supply Voltage	V _{RCC}	7	V
Max Exposed Field	H _E	4000	Oe ⁽¹⁾
ESD Voltage	V _{ESD}	4000	V
Operating Temperature	T _A	-40~125	°C
Storage Temperature	T _{stg}	-50 ~150	°C

Specification (V_{CC}=1.0V, T_A=25°C, Differential Output)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Supply Voltage	V _{CC}	Operating		1	7	V
Supply Current	I _{CC}	Output Open		60 ⁽²⁾		μA
Resistance(SOP8)	R			50 ⁽²⁾		KOhm
Sensitivity	SEN	Fit @±30Oe		6.0		mV/V/Oe
Saturation Field	H _{sat}			±75		Oe
Non-Linearity	NONL	Fit @±30Oe		0.5		%FS
Offset Voltage	V _{offset}		-15		15	mV/V
Hysteresis	Hys	Fit @±30Oe		0.3		Oe
Temperature Coefficient of Resistance	TCR	H = 0 Oe		-640		PPM/°C
Temperature Coefficient of Sensitive	TCS			-13		PPM/°C


Notes:

(1) 1 Oe (Oersted) = 1 Gauss in air = 0.1 millitesla = 79.8 A/m.


(2) Custom resistance may be available upon request.

Package Information


SOP8 package drawing

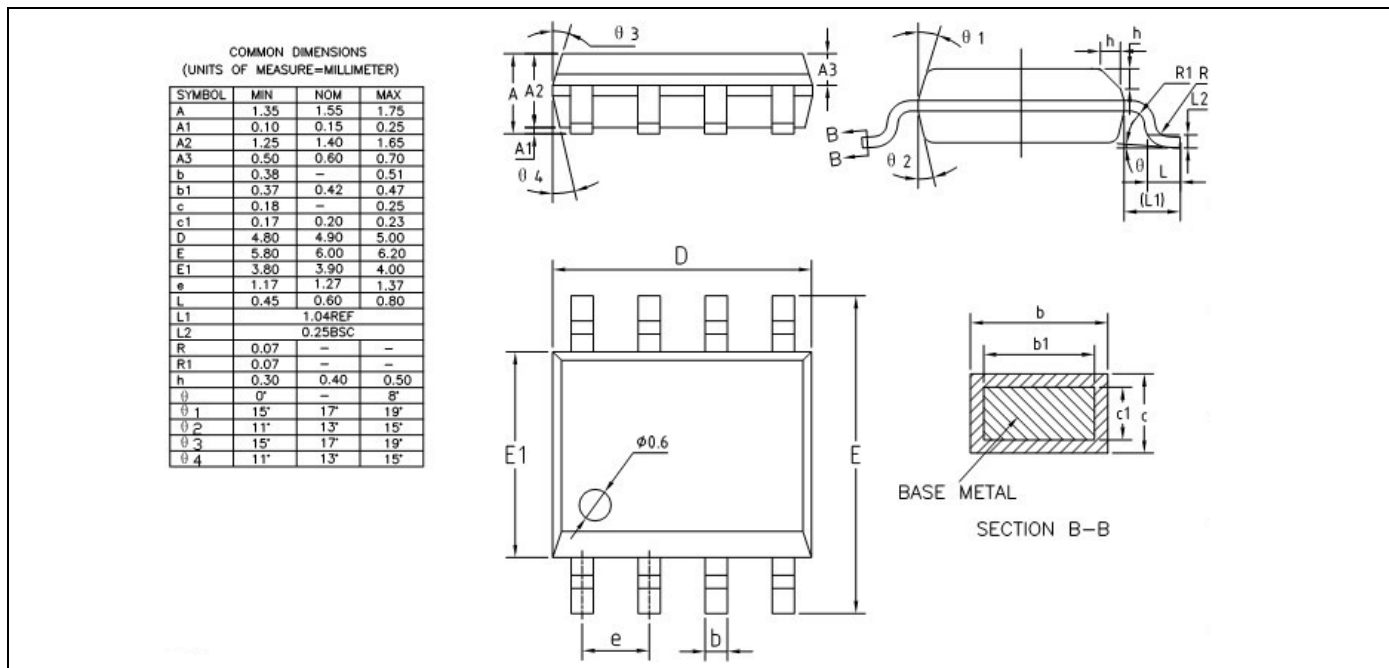

DFN8 package drawing

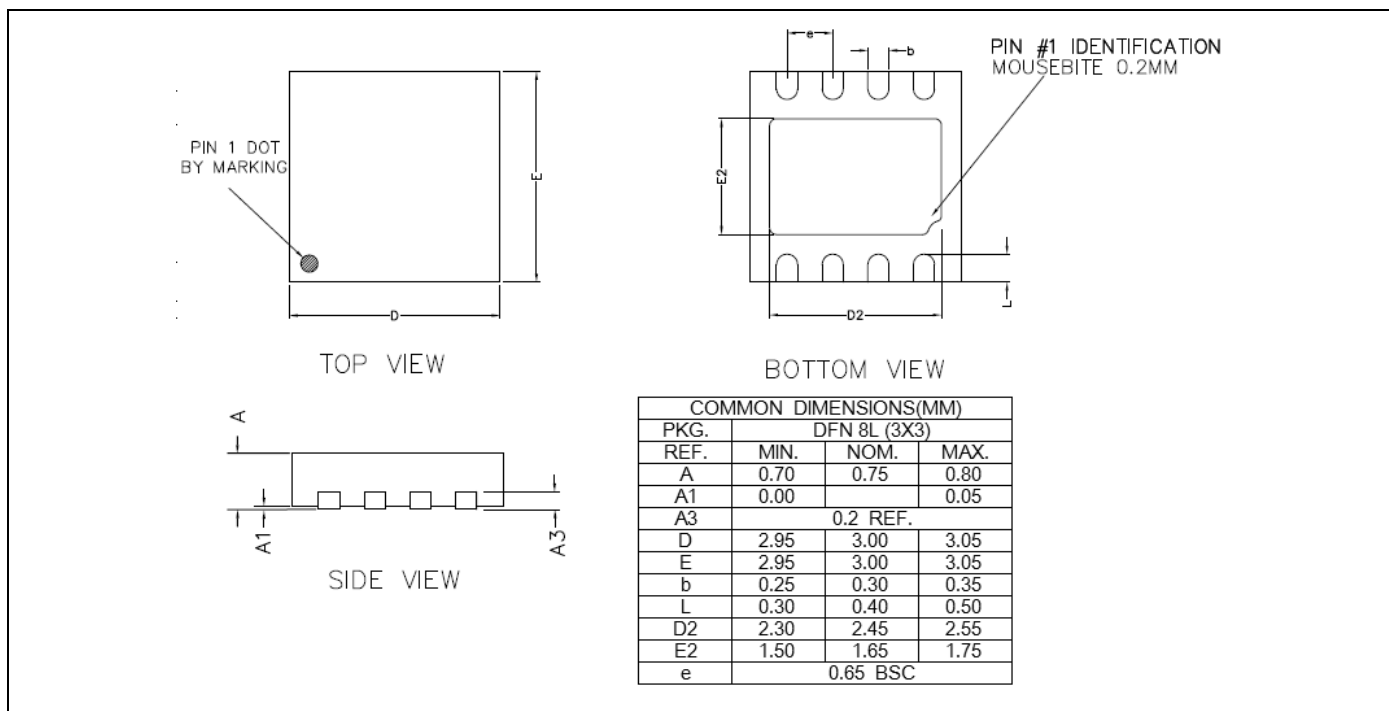

TMR Sensor Position

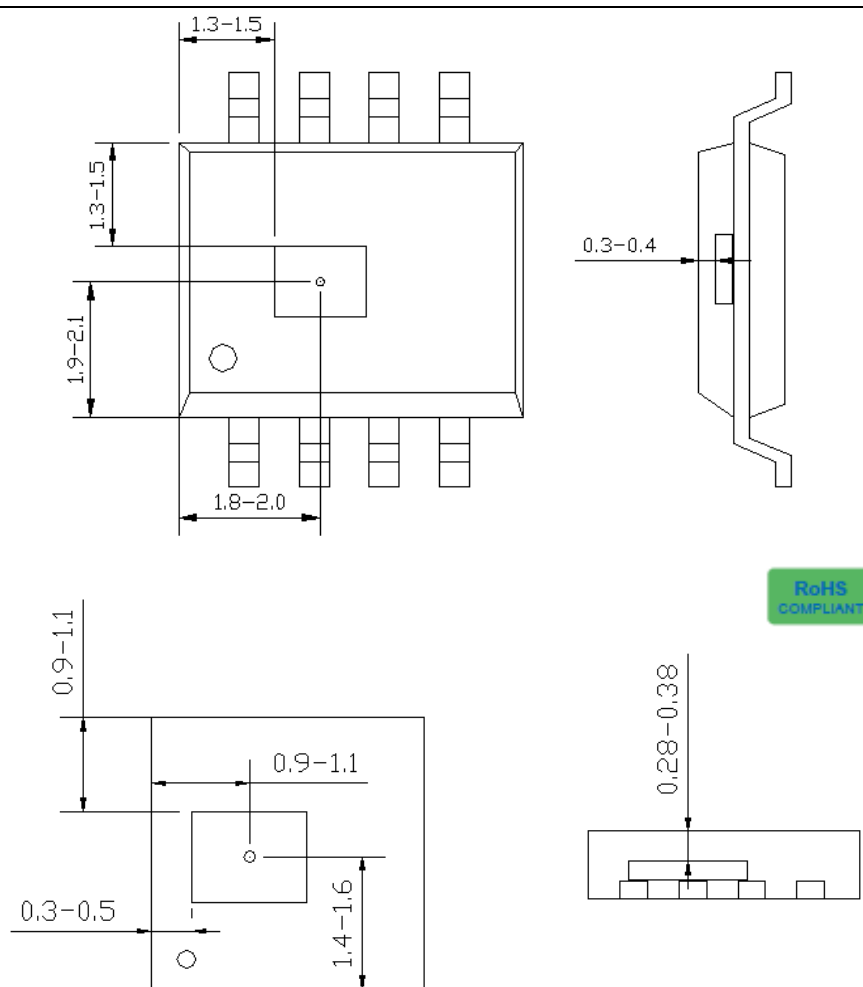

RoHS
COMPLIANT

Top view and side view(unit: mm)



MultiDimension Technology Co., Ltd.

Address: No. 7 Guangdong Road, Zhangjiagang Free Trade Zone, Jiangsu, 215634, China

Web: www.dowaytech.com/en

Email: info@dowaytech.com

The information provided herein by MultiDimension Technology Co., Ltd. (hereinafter MultiDimension) is believed to be accurate and reliable. Publication neither conveys nor implies any license under patent or other industrial or intellectual property rights. MultiDimension reserves the right to make changes to product specifications for the purpose of improving product quality, reliability, and functionality. MultiDimension does not assume any liability arising out of the application and use of its products. MultiDimension's customers using or selling this product for use in appliances, devices, or systems where malfunction can reasonably be expected to result in personal injury do so at their own risk and agree to fully indemnify MultiDimension for any damages resulting from such applications.