
ANTENNA TECHNOLOGIES LIMITED COMPANY

Model WM698M2155UL

UNDER LID ANTENNA


Key Features

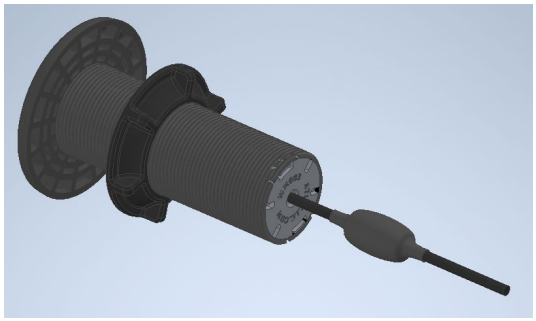

- LTE-M/ CATM1 Bands 2, 4, 12, 13 with 867 MHz and 915 MHz bands
- Mounts below polymer manhole cover lids and is water tight (4ft of water for 119 hours)
- Removable cap designed to withstand light traffic and is designed to be ADA compliant
- LMR195 cable, custom lengths available, Customer specified connector available

MADE IN THE USA
1 YR WARRANTY

Specifications	WM698M2155UL
Frequency Range, MHz	863-870, 902-828, B2(1850-1910, 1930-1990), B4 (1710-1755, 2110-2155), B12 (698-716, 728-746), B13 (777-787, 746-756)
VSWR	2:1 typical, 2.5:1 Max
Gain	0 dBi typical
Polarization	Vertical
Size	Fits into 1.88” diameter hole. See diagram below
Cable	LMR195, customer specified lengths
Connector	Customer specified
Submersion	Housing tested to 4ft of water for 119 hours

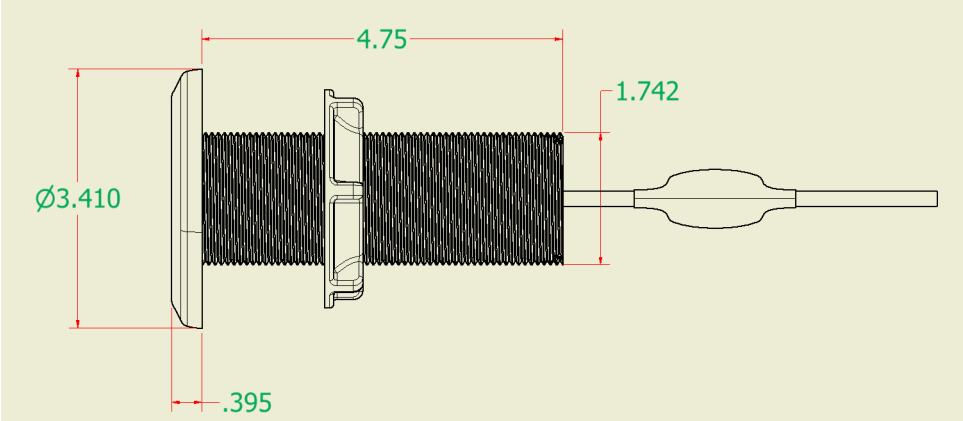

22560 Glenn Drive #114 I Sterling, Virginia 20164
www.atlcllc.com sales@atlcllc.com
Office: 703-450-5517

ATLC products for military use may be subject to U.S. ITAR EXPORT CONTROLS, an export license may be required.