

C5750X7T2J474M250KE

TDK Item Description : C5750X7T2J474MT***S



Application & Main Feature

Commercial Grade (Soft Termination)

Series

C5750 [EIA CC2220]

Dimensions

L	5.70mm +0.5,-0.4mm
W	5.00mm +/-0.4mm
T	2.50mm +/-0.3mm
B	0.20mm Min.
G	

Temperature Characteristic

X7T (-55 to 125 degC +22,-33%)

Rated Voltage

2J (630Vdc)

Capacitance

470nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor


2.5% Max.

Insulation Resistance


1.063Gohm Min

AEC-Q200


Not Applicable




DC Bias Characteristic

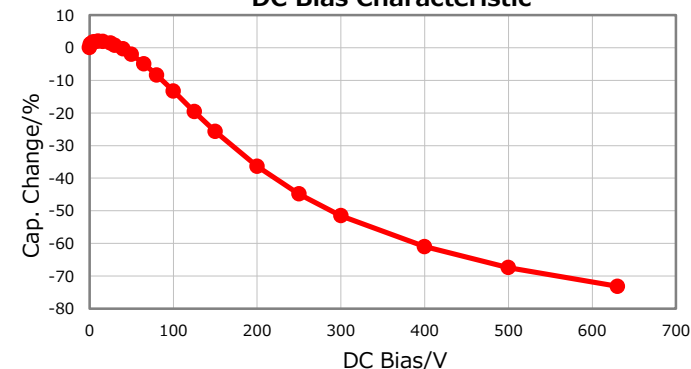


|Z|, ESR vs. Freq. Characteristics (Simulation Data)

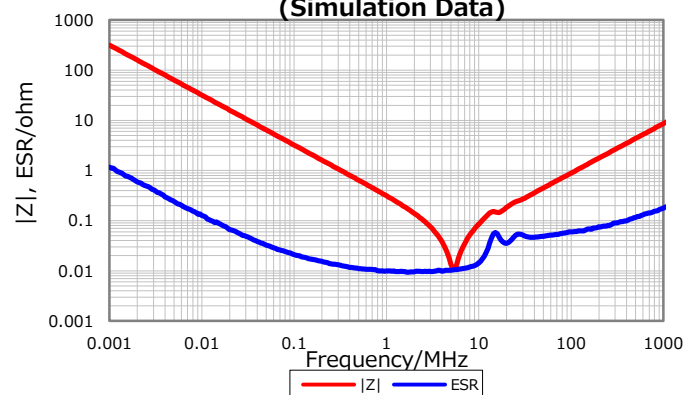


Temperature Characteristics

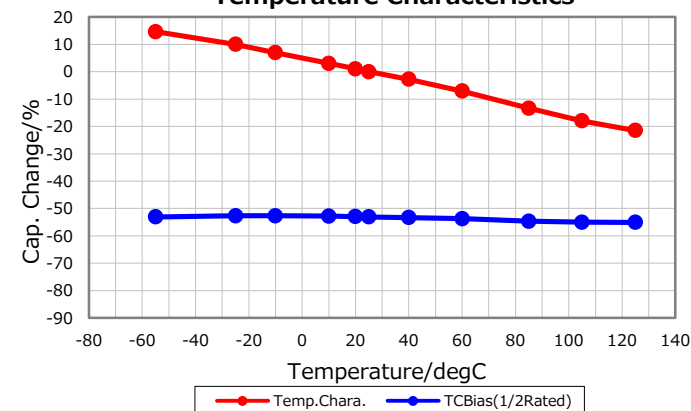

Cap. vs. Freq. Characteristic

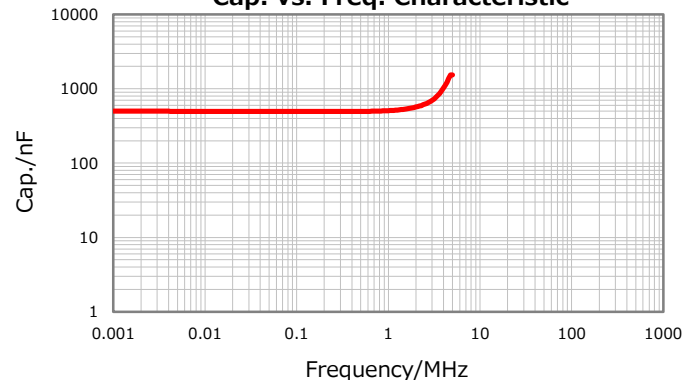

Ripple Temperature Rise Characteristics

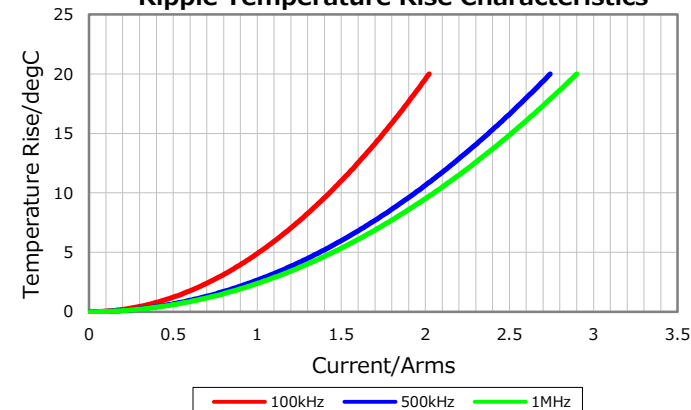

All specifications are subject to change without notice.

March 16, 2017