Data sheet

15278.2 FBK 20C



Interface module for ribbon cables, Screw connection and ribbon cable connector, Mounting type: Mounting rail TS 35, No. of poles: 20

Business data

Article number	15278.2
Article name	FBK 20C
GTIN (EAN)	4044211046897
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	81.8 g
Weight per piece (including packaging)	98.86 g
Unit of weight	G
Customs number	85369010
Country of origin	NL
Product description	Interface module

Data sheet

15278.2 FBK 20C

Technical data

Dimensions	
Length	47 mm
Width	63 mm
Height TS 35/7.5	61 mm
Ratings	
Overvoltage category	III
Contamination degree	2
Connection data	
Connection principle	Screw connection
Number of connections	1
No. of poles	20
Wire cross-section single core (rigid), min.	0.2 mm²
Wire cross-section single-core (rigid), max.	4 mm²
Wire cross-section stranded, min.	0.2 mm²
Wire cross-section stranded, max.	2.5 mm²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm²
Stripping length	7 mm
Torque	0.6 Nm
Input data	
Max. operating voltage AC/DC	125 V
Current load per channel, max.	1 A
Materials	
Working temperature, min.	-20 °C
Working temperature, max.	50 °C
Further technical data	
Mounting type	TS 35
Connector type	Ribbon cable according to EN 60603-13
Test voltage	0.67 kV

Data sheet

15278.2 FBK 20C

Technical data

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-06-10
REACH Candidate Substance Note	No
RoHS Conform	yes


Approvals

Standards and regulations

Standards / specifications	DIN VDE 0110 / EN 50178

Data sheet
15278.2 FBK 20C

Media

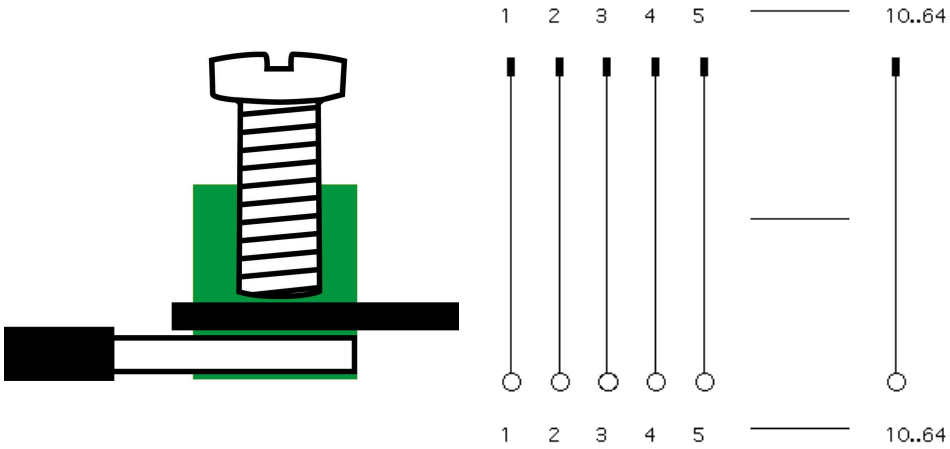

Data sheet
15278.2 FBK 20C

Accessories