


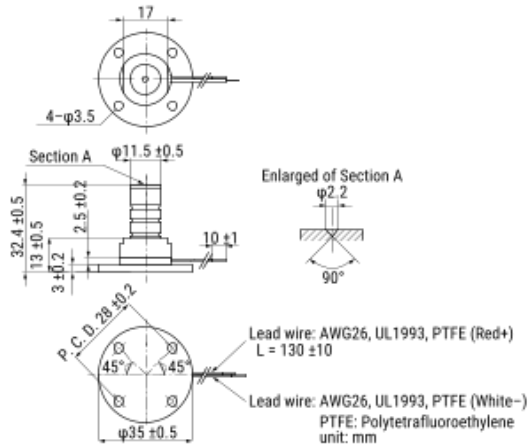

General Information

Style	Metal Sealed
Description	Metal Sealed Type Multilayer Piezoelectric Actuators
RoHS	With Exemptions
SCIP Number	c64eed42-9f3b-4f55-976e-a799ec5ecf68
Notes	Flange Type, V Groove.
REACH	SVHC (PZT – CAS 12626-81-2)

Specifications

Series	ASB
Displacement	34um +/-6um
Voltage DC	150 VDC
Capacitance	3 uF
Capacitance Tolerance	20%
Resonant Frequency	12 kHz
Generated Force	800 N
Insulation Resistance	15 MOhms
Temperature Range	-25/+85°C

Click [here](#) for the 3D model.

Dimensions

D	35mm +/-0.5mm
L	52.4mm +/-0.5mm
LL	130mm +/-10mm

Packaging Specifications

Packaging	Tray
Packaging Quantity	1