



| CODE No.        | PART No.          | NUMBER OF CONTACT | A  | B    | C    |
|-----------------|-------------------|-------------------|----|------|------|
| CL543-0682-1-57 | DF11C- 4DP-2V(57) | 4                 | 2  | 8.5  | 8.7  |
| CL543-0683-4-57 | DF11C- 6DP-2V(57) | 6                 | 4  | 10.5 | 10.7 |
| CL543-0684-7-57 | DF11C- 8DP-2V(57) | 8                 | 6  | 12.5 | 12.7 |
| CL543-0685-0-57 | DF11C-10DP-2V(57) | 10                | 8  | 14.5 | 14.7 |
| CL543-0686-2-57 | DF11C-12DP-2V(57) | 12                | 10 | 16.5 | 16.7 |
| CL543-0687-5-57 | DF11C-14DP-2V(57) | 14                | 12 | 18.5 | 18.7 |
| CL543-0688-8-57 | DF11C-16DP-2V(57) | 16                | 14 | 20.5 | 20.7 |
| CL543-0689-0-57 | DF11C-18DP-2V(57) | 18                | 16 | 22.5 | 22.7 |
| CL543-0690-0-57 | DF11C-20DP-2V(57) | 20                | 18 | 24.5 | 24.7 |
| CL543-0691-2-57 | DF11C-22DP-2V(57) | 22                | 20 | 26.5 | 26.7 |
| CL543-0692-5-57 | DF11C-24DP-2V(57) | 24                | 22 | 28.5 | 28.7 |
| CL543-0693-8-57 | DF11C-26DP-2V(57) | 26                | 24 | 30.5 | 30.7 |
| CL543-0694-0-57 | DF11C-28DP-2V(57) | 28                | 26 | 32.5 | 32.7 |
| CL543-0695-3-57 | DF11C-30DP-2V(57) | 30                | 28 | 34.5 | 34.7 |
| CL543-0696-6-57 | DF11C-32DP-2V(57) | 32                | 30 | 36.5 | 36.7 |
| CL543-0697-9-57 | DF11C-40DP-2V(57) | 40                | 38 | 44.5 | 44.7 |

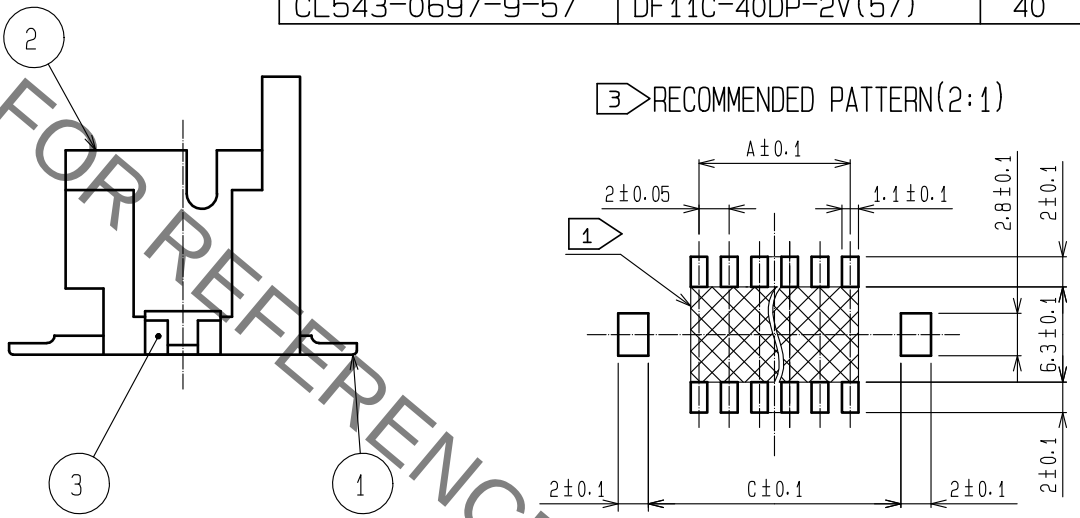

NOTES

- ①: IF THERE IS PATTERN ON  PART, THERE IS A POSSIBILITY THAT IT WILL MAKE CONTACT WITH THE LEADS.
- 2 : LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
- ③: RECOMMENDED METAL MASK THICKNESS: 0.15-0.2mm  
OPEN AREA RETIO: 100%

|                                                                                                                       |           |                                                                      |               |                      |  |  |  |            |                                           |                                                                                                                                                                             |           |                              |                       |                  |                   |                  |
|-----------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------|---------------|----------------------|--|--|--|------------|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------------------|-----------------------|------------------|-------------------|------------------|
| OPEN AREA RETIO:100%                                                                                                  |           |                                                                      |               |                      |  |  |  |            |                                           | 7                                                                                                                                                                           | PS        | REEL                         |                       |                  |                   |                  |
|                                                                                                                       |           |                                                                      |               |                      |  |  |  |            |                                           | 6                                                                                                                                                                           | POLYESTER | CLEAR(COVER TAPE)            |                       |                  |                   |                  |
| 2                                                                                                                     | POLYAMIDE |                                                                      | BEIGE,UL94V-0 |                      |  |  |  |            |                                           | 5                                                                                                                                                                           | PS        | CLEAR(EMBOSSED CARRIER TAPE) |                       |                  |                   |                  |
| 1                                                                                                                     | BRASS     | SURFACE:GOLD PLATED 0.2μm min<br>UNDER PLATING:NICKEL PLATED 1μm min |               |                      |  |  |  |            |                                           | 4                                                                                                                                                                           | POLYAMIDE | CAP. BLACK                   |                       |                  |                   |                  |
|                                                                                                                       |           |                                                                      |               |                      |  |  |  |            |                                           | 3                                                                                                                                                                           | BRASS     | TIN PLATED 1μm min           |                       |                  |                   |                  |
| NO.                                                                                                                   |           | MATERIAL                                                             |               | FINISH , REMARKS     |  |  |  |            |                                           | NO.                                                                                                                                                                         |           | MATERIAL                     |                       | FINISH , REMARKS |                   |                  |
| UNITS<br>mm                                                                                                           |           |                                                                      |               | SCALE<br>5 : 1       |  |  |  | COUNT<br>1 | DESCRIPTION OF REVISIONS<br>DIS-H-0001128 |                                                                                                                                                                             |           |                              | DESIGNED<br>TS.MIYAKI |                  | CHECKED<br>SZ.ONO | DATE<br>20211006 |
|  HIROSE<br>ELECTRIC<br>CO., LTD. |           |                                                                      |               | APPROVED :TS. SAKATA |  |  |  | 20080401   |                                           | DRAWING NO. EDC-163554-57-04                                                                                                                                                |           |                              |                       |                  |                   |                  |
|                                                                                                                       |           |                                                                      |               | CHECED :TS. KUMAZAWA |  |  |  | 20080401   |                                           | PART NO. DF11C-*DP-2V(57)                                                                                                                                                   |           |                              |                       |                  |                   |                  |
|                                                                                                                       |           |                                                                      |               | DESIGNED :KT. ISHII  |  |  |  | 20080401   |                                           | CODE NO. CL543-                                                                                                                                                             |           |                              |                       |                  |                   |                  |
|                                                                                                                       |           |                                                                      |               | DRAWN :YK. NAKATSU   |  |  |  | 20080313   |                                           |   |           |                              |                       |                  |                   |                  |



## STYLE AND DIMENSION OF REEL



1. Calculated shelf life in sealed bag :  
6 months at < 60°C and <70% relative humidity(RH)
2. Peak package body temperature:  
250°C (within 168 hours (7 days) after opening sealed bag)  
240°C (after 168 hours (7 days) after opening sealed bag)
3. After bag is opened, devices that will be subjected to reflow solder or other high temperature with 250°C must be processed with BAKING @ 50°C/48 hours in baking oven.
4. If you do not use up all items, please seal the bag to prevent air from entering.

Bag Seal Date: see part No. Label



Note label

# HRS