
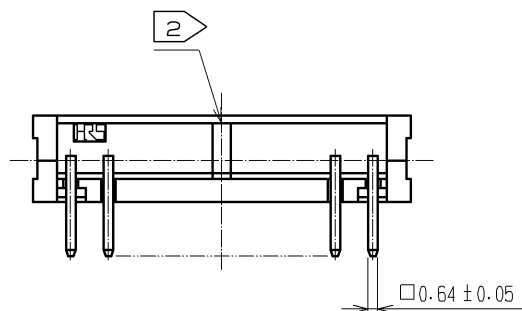
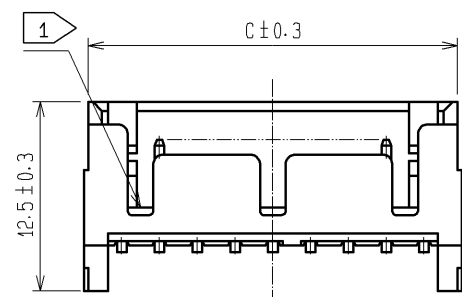
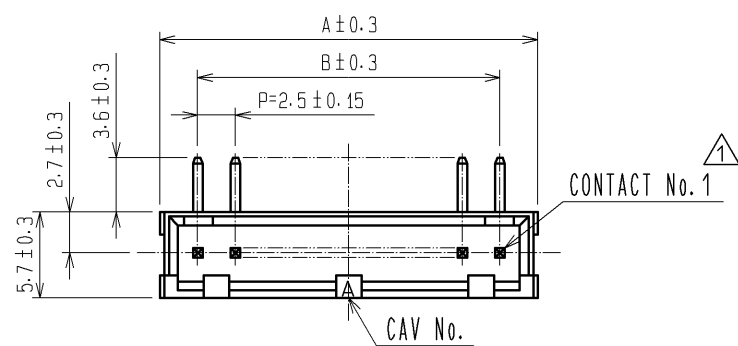


# RECOMMENDED PATTERN(5 : 1)

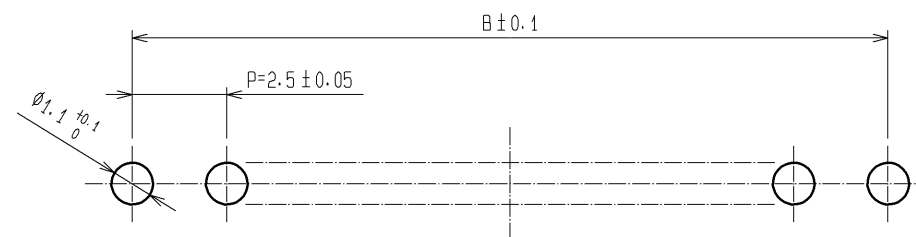

| CODE NO.        | PART NO.        | CONTACT | A    | B    | C    |
|-----------------|-----------------|---------|------|------|------|
| CL541-2034-0-00 | DF1BZ- 2P-2.5DS | 2       | 7.5  | 2.5  | 6.9  |
| CL541-2035-2-00 | DF1BZ- 3P-2.5DS | 3       | 10.0 | 5.0  | 9.4  |
| CL541-2036-5-00 | DF1BZ- 4P-2.5DS | 4       | 12.5 | 7.5  | 11.9 |
| CL541-2037-8-00 | DF1BZ- 5P-2.5DS | 5       | 15.0 | 10.0 | 14.4 |
| CL541-2038-0-00 | DF1BZ- 6P-2.5DS | 6       | 17.5 | 12.5 | 16.9 |
| CL541-2039-3-00 | DF1BZ- 7P-2.5DS | 7       | 20.0 | 15.0 | 19.4 |
| CL541-2040-2-00 | DF1BZ- 8P-2.5DS | 8       | 22.5 | 17.5 | 21.9 |
| CL541-2041-5-00 | DF1BZ- 9P-2.5DS | 9       | 25.0 | 20.0 | 24.4 |
| CL541-2042-8-00 | DF1BZ-10P-2.5DS | 10      | 27.5 | 22.5 | 26.9 |
| CL541-2043-0-00 | DF1BZ-11P-2.5DS | 11      | 30.0 | 25.0 | 29.4 |
| CL541-2044-3-00 | DF1BZ-12P-2.5DS | 12      | 32.5 | 27.5 | 31.9 |
| CL541-2045-6-00 | DF1BZ-13P-2.5DS | 13      | 35.0 | 30.0 | 34.4 |
| CL541-2046-9-00 | DF1BZ-14P-2.5DS | 14      | 37.5 | 32.5 | 36.9 |
| CL541-2047-1-00 | DF1BZ-15P-2.5DS | 15      | 40.0 | 35.0 | 39.4 |
| CL541-2048-4-00 | DF1BZ-16P-2.5DS | 16      | 42.5 | 37.5 | 41.9 |
| CL541-2049-7-00 | DF1BZ-18P-2.5DS | 18      | 47.5 | 42.5 | 46.9 |
| CL541-2050-6-00 | DF1BZ-20P-2.5DS | 20      | 52.5 | 47.5 | 51.9 |

- NOTES 1: FOR 2 AND 3 CONTACTS, ONE MIS-INSERTION DEPRESSION SHALL BE MADE, AND 4 TO 7 CONTACTS IS 2 MIS-INSERTION DEPRESSION TO BOTH ENDS, FOR OTHER, 3 MIS-INSERTION DEPRESSION AS PER DRAWING.
- 2: WHEN THE NUMBERS OF CONTACTS IS ODD, THE STAND-OFF SHIFTS 1.25 RIGHTWARD. (STAND-OFF AVAILABLE FROM 5 POSITIONS UP.)

|                           |           |                         |            |                                          |                                                                       |                        |                  |
|---------------------------|-----------|-------------------------|------------|------------------------------------------|-----------------------------------------------------------------------|------------------------|------------------|
| 1                         | POLYAMIDE | UL94V-0, NATURAL(WHITE) | 2          | BRASS                                    | SURFACE: TIN PLATED 1μm min<br>UNDER PLATING: NICKEL PLATED 0.5μm min |                        |                  |
| NO.                       | MATERIAL  | FINISH, REMARKS         | NO.        | MATERIAL                                 | FINISH, REMARKS                                                       |                        |                  |
| UNITS<br>mm               |           | SCALE<br>5 : 1          | COUNT<br>1 | DESCRIPTION OF REVISIONS<br>DIS-H-002720 | DESIGNED<br>YK. NAKATSU                                               | CHECKED<br>HK. UMEHARA | DATE<br>08.01.15 |
| HIROSE ELECTRIC CO., LTD. |           | APPROVED : KJ. KATAYOSE | 05.01.05   | DRAWING NO.<br>EDC3-305814-01            |                                                                       |                        |                  |
|                           |           | CHECKED : TY. OMA       | 05.01.05   | PART NO.<br>DF1BZ- *P-2.5DS              |                                                                       |                        |                  |
|                           |           | DESIGNED : TS. KUMAZAWA | 05.01.05   | CODE NO.<br>CL541-                       |                                                                       |                        |                  |
|                           |           | DRAWN : TS. KUMAZAWA    | 05.01.05   |                                          |                                                                       |                        |                  |