

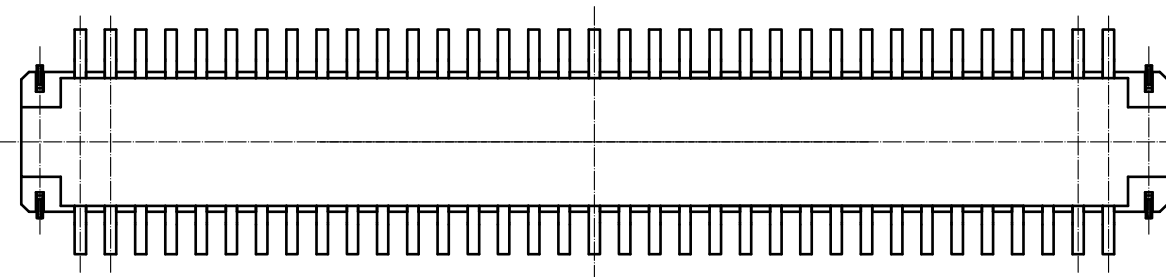
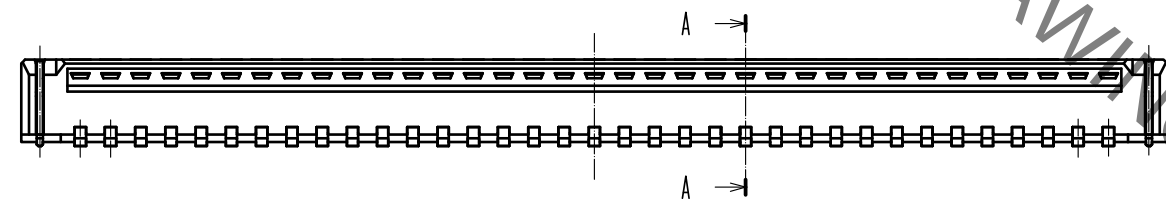




Sep.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

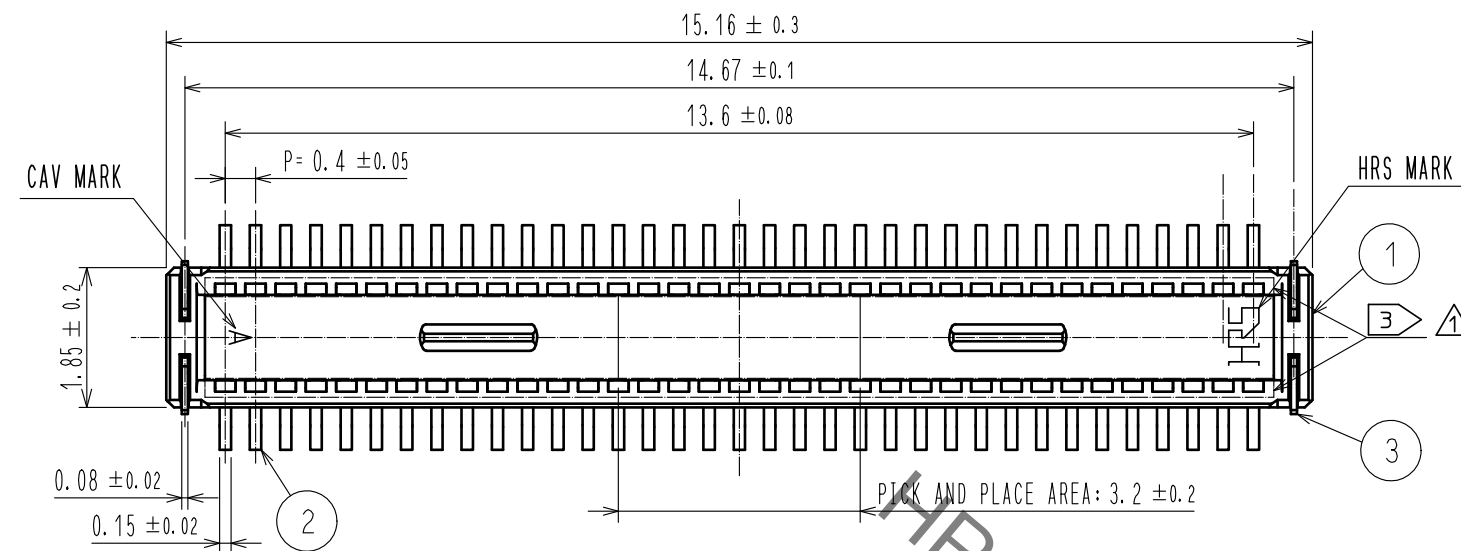

- NOTES
1. ALL LEADS METAL FITTINGS CO-PLANARITY SHALL BE 0.1mm MAX.
 2. IS NON-CONDUCTIVE AREA.
 3. THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA. BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

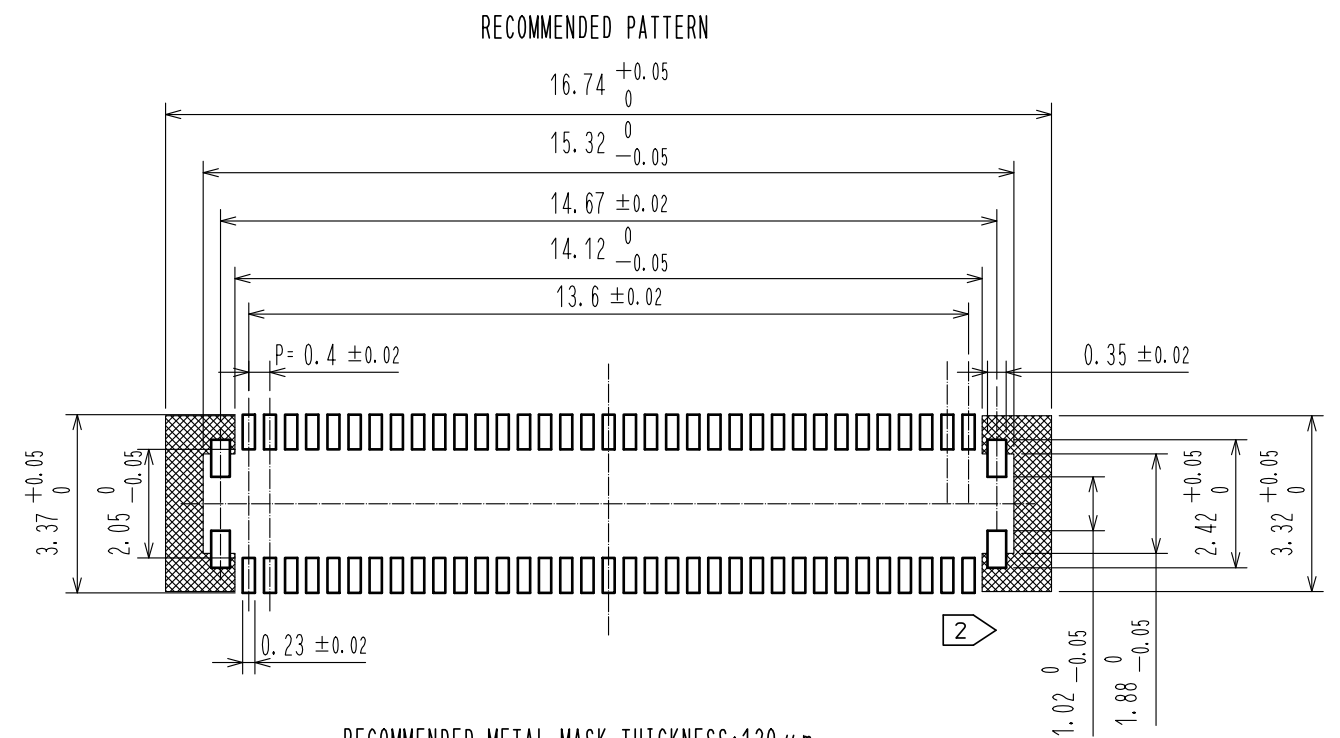

RECOMMENDED METAL MASK THICKNESS: $120 \mu\text{m}$
RECOMMENDED MASK OPENING RATIO: 80% FOR LEAD PAD

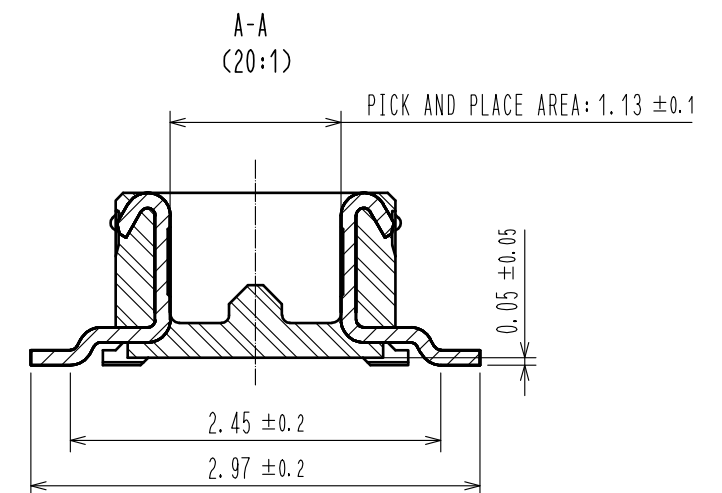

			7	PS	CLEAR(REINFORCEMENT COLLAR)
			6	PS	BLACK(PLASTIC REEL)
			5	POLYESTER	CLEAR(COVER TAPE)
2	PHOSPHOR BRONZE	CONTACT AREA: Au 0.05 μm MIN	4	PS	CLEAR(EMBOSSED CARRIER TAPE)
		SMT LEAD: Au 0.05 μm MIN	3	PHOSPHOR BRONZE	CONTACT AREA: Au 0.05 μm MIN
		UNDERPLATING: NICKEL 1 μm MIN			SMT LEAD: Au 0.05 μm MIN
1	LCP	BLACK, UL94V-0			UNDERPLATING: NICKEL 1 μm MIN
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		10 : 1		2				

	HIROSE ELECTRIC CO., LTD.	APPROVED : MO. ISHIDA	20150701	DRAWING NO.	EDC-349576-58-01		
		CHECED : TS. MIYAZAKI	20150701		PART NO.	DF40GB-70DP-0.4V(58)	
		DESIGNED : SH. HOSODA	20150701	CODE NO.		CL684-4199-7-58	
		DRAWN : KR. AJITO	20150701				

