

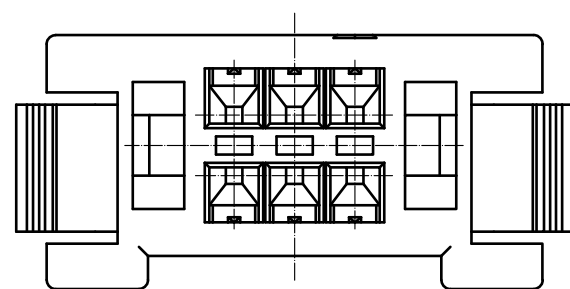
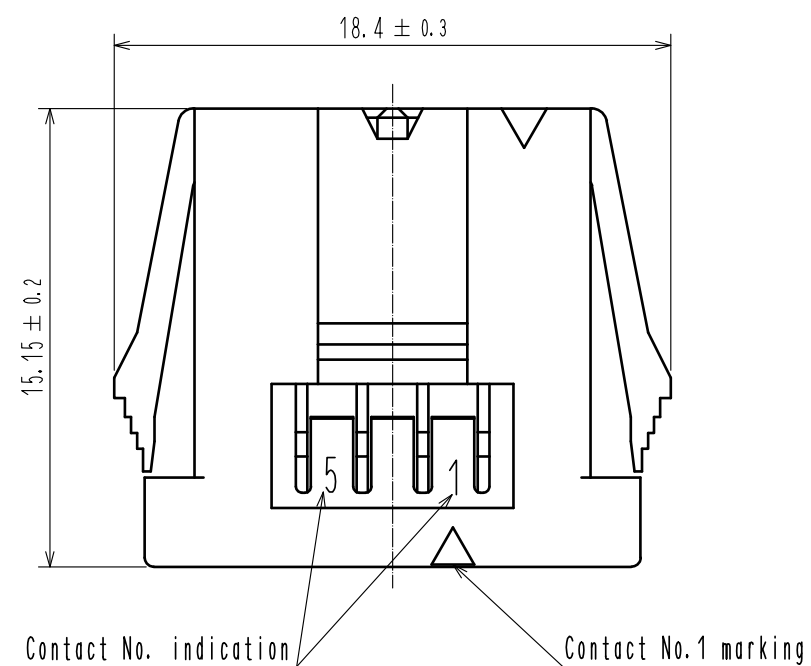


Sep.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

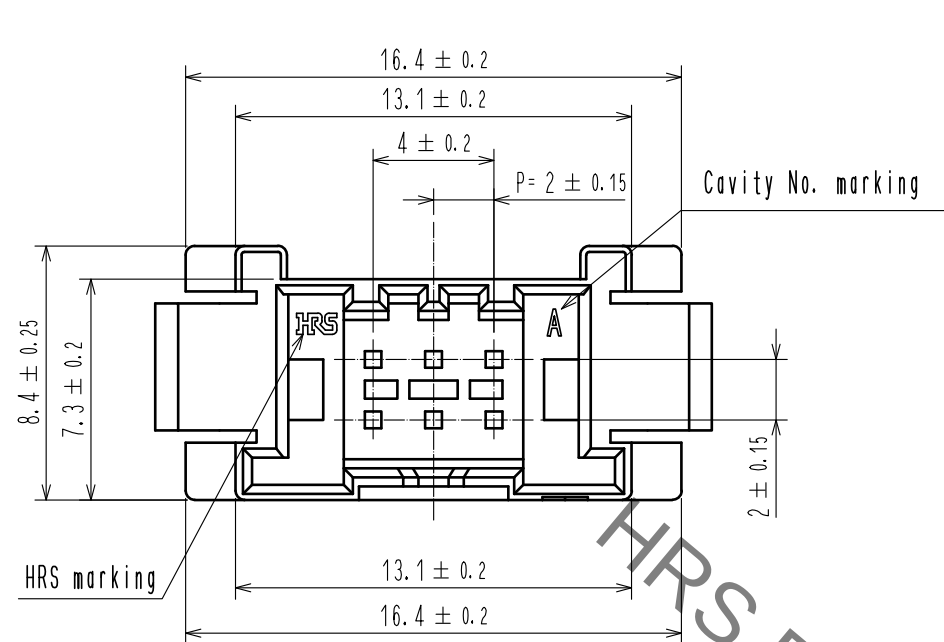

1 Recommended panel cutout dimension

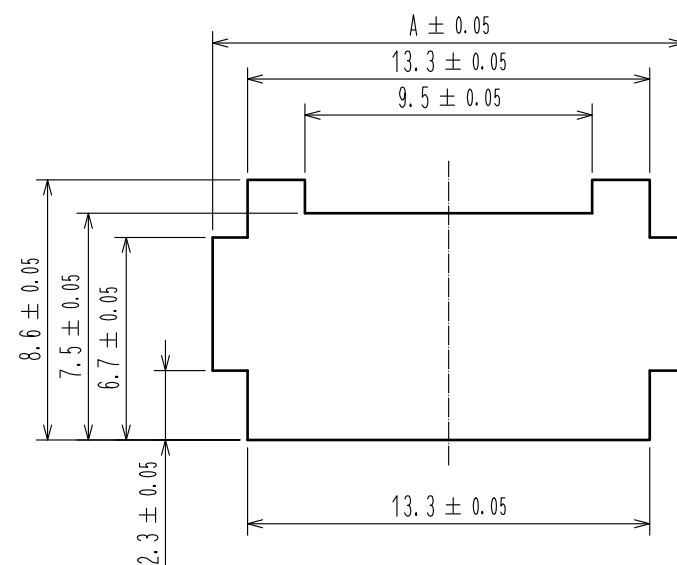


2

Panel thickness	A
0.5~0.8	15.6
0.9~1.3	16.1
1.4~1.8	16.5
1.9~2.3	16.9

- Note 1 Please use non-radius side for the panel hooking area.
2 Applicable panel thicknessing is 2.3 to 0.5 mm.
3 Consult hirose for the other panel cutout designs than recommended one.
4. Per pack : 100 pieces.
5. UL(File No.E52653),
C-UL(File No.E52653) authorization article.



c7Kus				1	PBT	UL94V-0. BLACK	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	
UNITS mm		SCALE 4 : 1	 COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00004537		DESIGNED TS.MIYAKI	CHECKED HS. OKAWA DATE 20181221
 HIROSE ELECTRIC CO., LTD.	APPROVED : HS. OKAWA		20160601	DRAWING NO. EDC-366283-00-00			
	CHECKED : YN. TAKASHITA		20160601	PART NO. DF51-6DEP-2C			
	DESIGNED : TT. OHSAKO		20160601	CODE NO. CL543-5072-0-00			
	DRAWN : TT. OHSAKO		20160601	 1			