

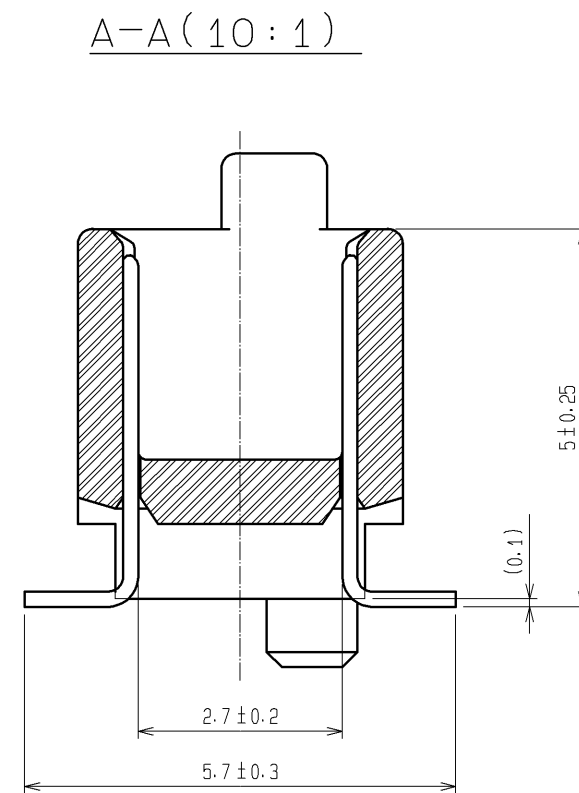


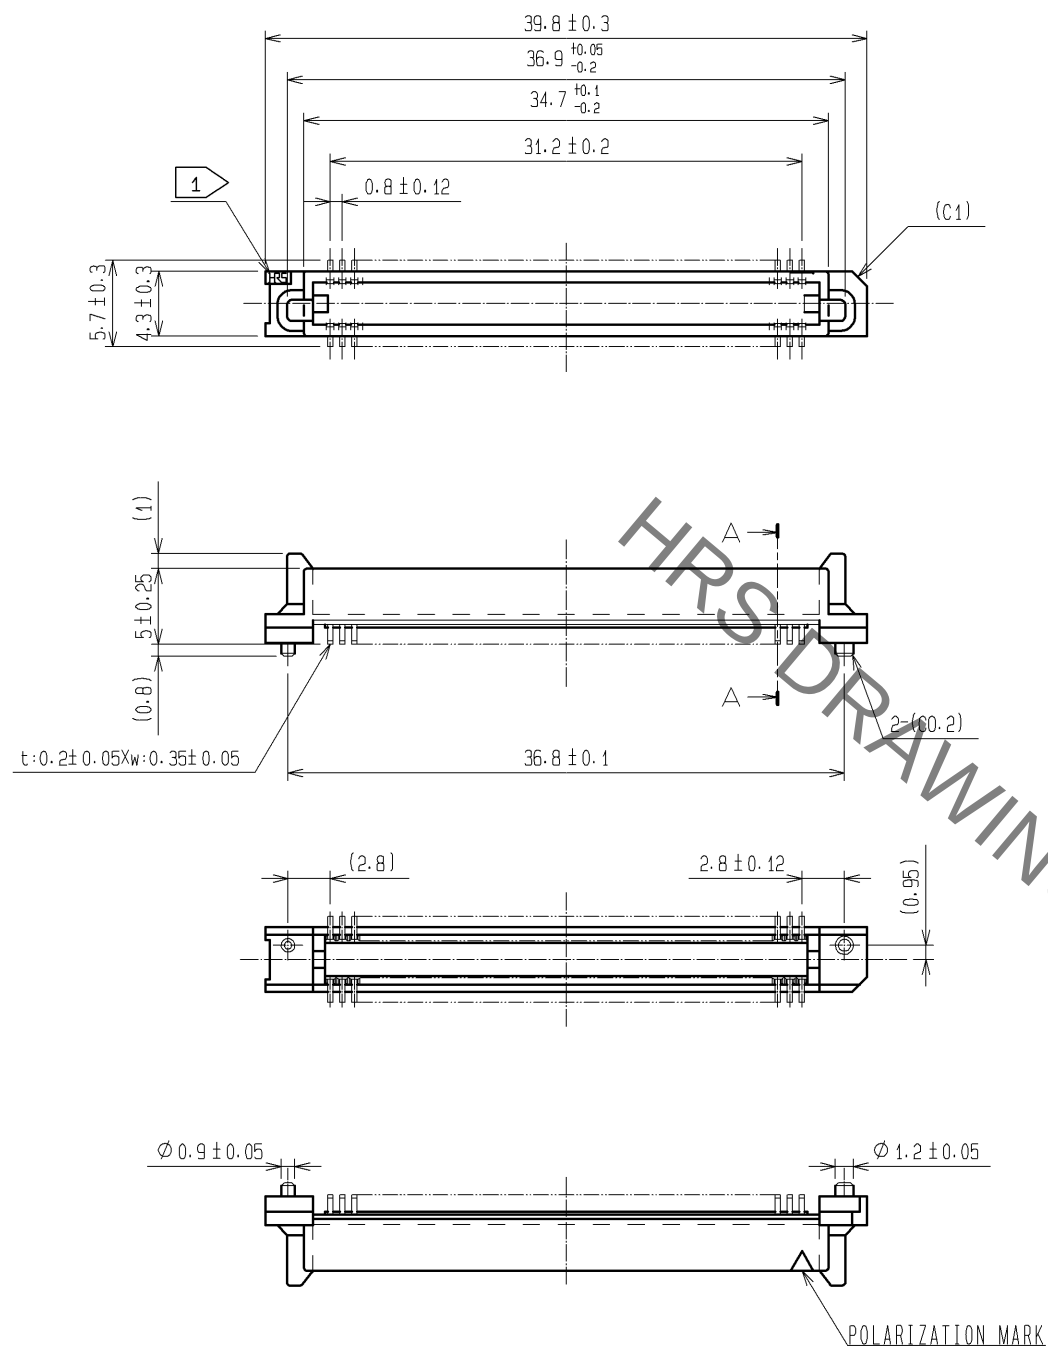

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS $t=0.15$)

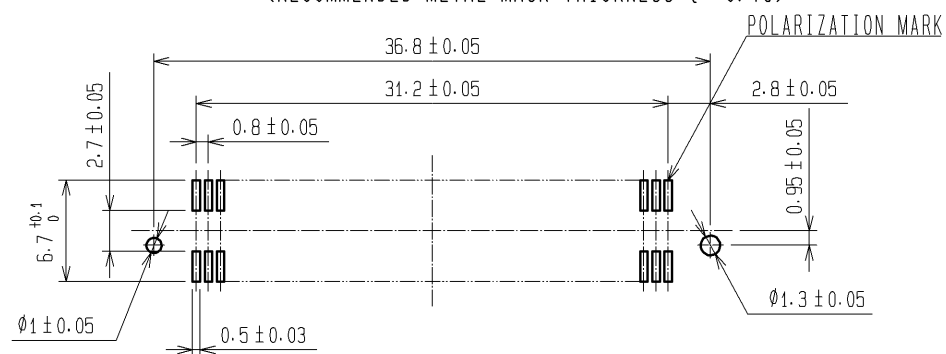

- NOTES ① HRS MARK SHOULD BE OPTIONAL.
2. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.			
						LEAD AREA:TIN-PLATING 1μm min.			
						UNDER PLATING:NICKEL 1μm min.			
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		08.06.26		DRAWING NO.		EDC3-084972-25	
		CHECED : HT. YAMAGUCHI		08.06.25		PART NO.		FX6-80P-0.8SV1(71)	
		DESIGNED : SY. KAMIGA		08.06.23		CODE NO.		CL576-0027-7-71	
		DRAWN : TP. MATSUMOTO		08.06.18					
						 1/1			