


GT-2050R

Aliases (UNFGT2050RXXXX)

KEMET, GT, EMI/RFI Filters, Noise Suppression, 250 VAC

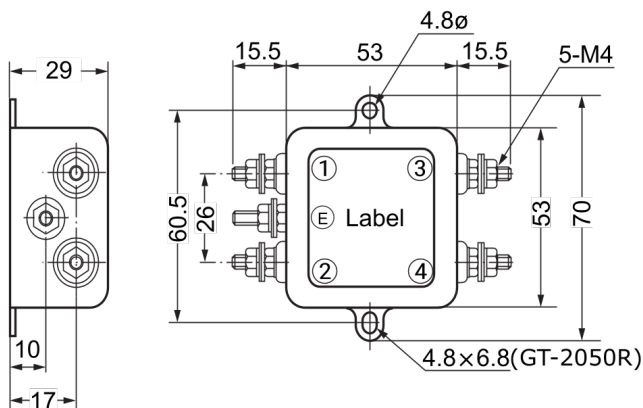

Click [here](#) for the 3D model.

Dimensions

L	70mm NOM
W	53mm MAX
H	29mm MAX
Lead	Screw Terminals

Packaging Specifications

Packaging	Tray, Box
Packaging Quantity	30
Component Weight	160 g

General Information

Series	GT
Style	Metal Box
Description	Noise Filters
RoHS	With Exemptions
SCIP Number	178c3d71-76e7-4e48-aa60-e3285a8f7efd
Notes	DC Available.
Miscellaneous	35 K Self-Temperature Rise Max.
Lead	Screw Terminals
Terminal Type	Screw

Specifications

Voltage AC	250 VAC
Voltage	1500 VAC Withstanding Voltage 1 Min. Line to Ground
Rated Current	5 A (AC/DC)
Temperature Range	-25/+55°C
Leakage Current	0.5 mA MAX (250 V 60 Hz)
Resistance	300 MOhms MIN Insulation 500 VDC 1 Min. Line To Ground

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.