

Nov.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

△の数 △COUNT	訂正記事 DESCRIPTION OF REVISIONS	担当 BY	検図 CHKD	年月日 DATE	△の数 △COUNT	訂正記事 DESCRIPTION OF REVISIONS	担当 BY	検図 CHKD	年月日 DATE
△				. .	△				. .
△				. .	△				. .
△				. .	△				. .

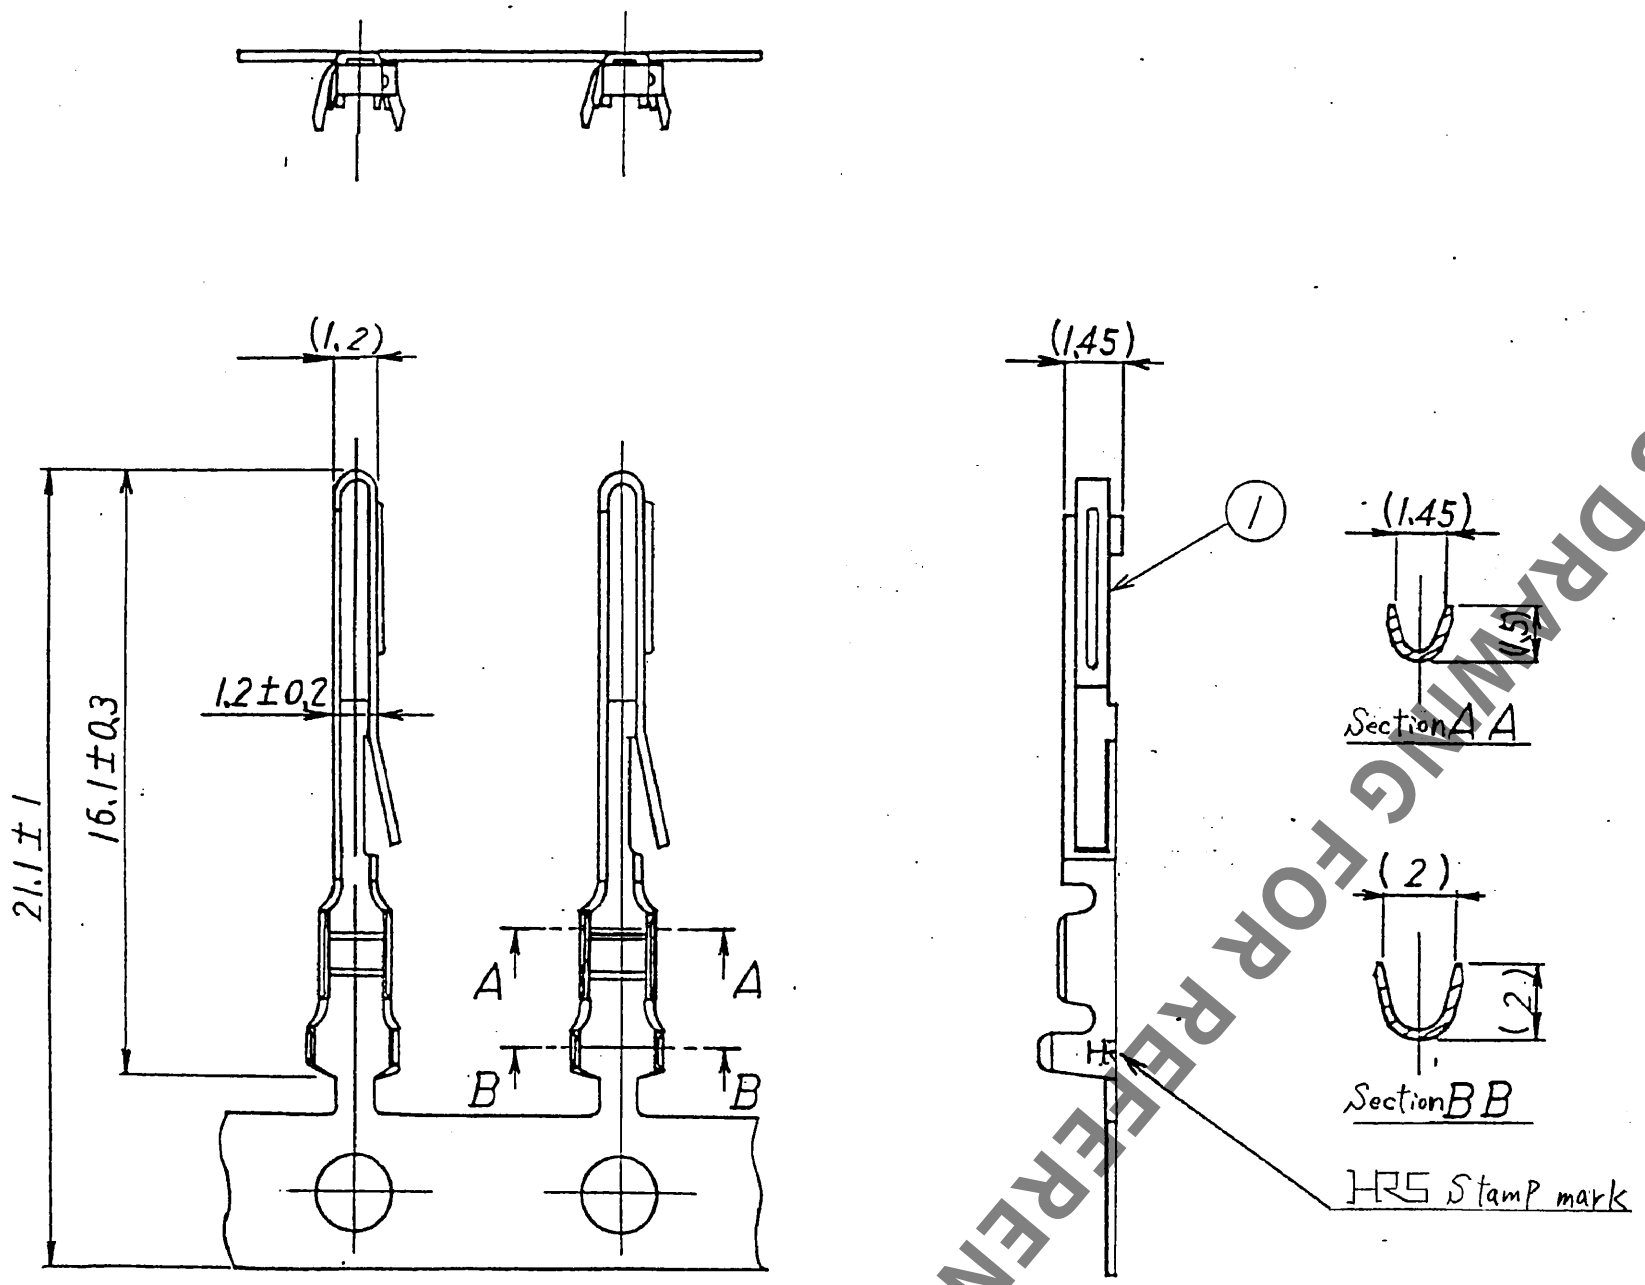

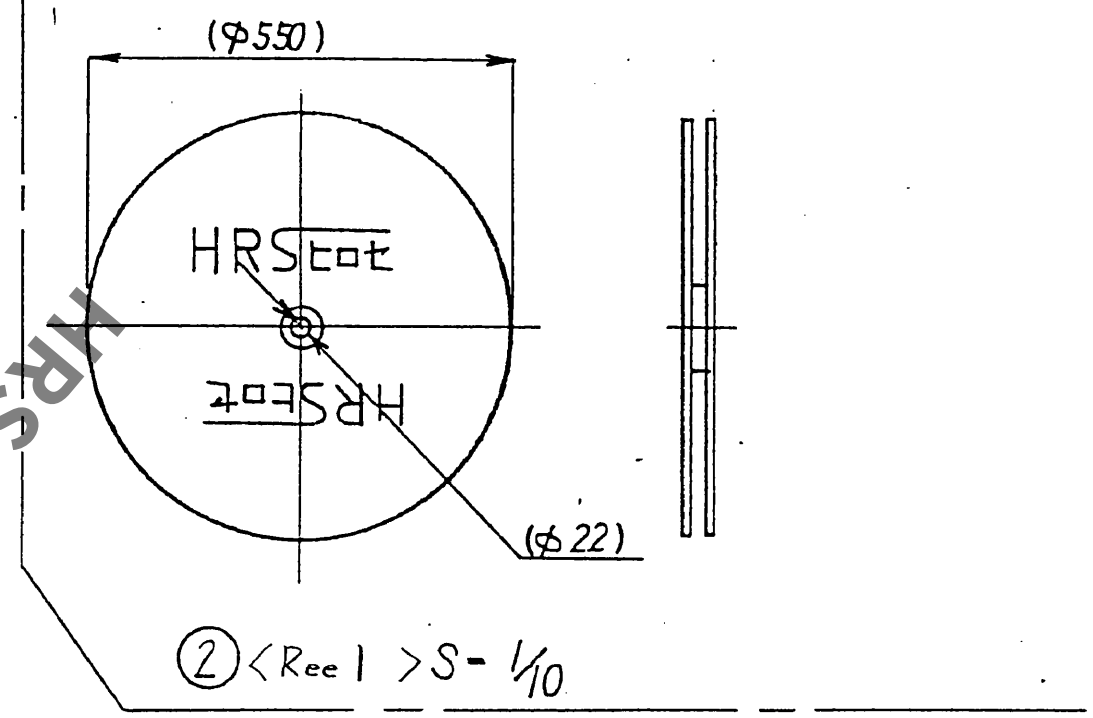

Note 1. Applicable cable size AWG# 28~24

2. 1 reel consists of 8000 pins.

3. Application devices and application requirements (crimp height etc.) shall be specified by the cable used.

FOR REFERENCE
HRS DRAWING

部番 No.	材質 MATERIAL	処理・備考 FINISH, REMARKS	部番 No.	材質 MATERIAL	処理・備考 FINISH, REMARKS
1	Phosphor bronze	Selective gold plating over nickel plating			

一般公差 GENERAL DIMENSION TOLERANCE	
寸法区分 OVER TO	公差 TOLERANCE
6	±0.3
6 18	±0.5
18 50	±0.7
50 125	±1
125 250	±1.3
250 500	±2
角度 ANGULAR	±1°

旧製品コード CODE No. (OLD)	製図 DRAWN	担当 DESIGNED	検図 CHECKED	査閲 REVIEWED	承認 APPROVED	出図 ISSUED
	H. Shimazu 11.3.91	T. Watanabe 14.3.91	H Miwa 14.3.91	. .	A. Nakazawa 15.3.91	. .

図名 DRAWING NAME: 承認図

DRAWING FOR APPROVAL

図番 DRAWING No.: ADC3-27839

製品名 PART No.: QR/P8-PC-221

ヒロセ電機株式会社 HIROSE ELECTRIC CO., LTD.

単位 UNITS: mm

尺度 SCALE: 5:1

製品コード CODE No.: CL221-0176-4

包装指定 TO
Q2

FORM No. 202