


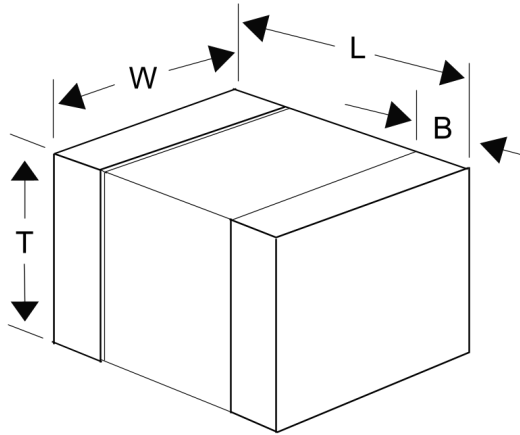

Click [here](#) for the 3D model.

General Information	
Series	Z-SMS
Style	SMD Chip
Description	Chip Bead Signal Line
Features	Designed As A Noise Countermeasure For 200MHz-500MHz Range Where The Rise Of The Z Component Is In The High Frequency Area
RoHS	Yes

Specifications	
Impedance	22 Ohms (100 mHz)
Impedance Tolerance	25%
Ripple Current	200 mA (MAX)
Temperature Range	-55/+125°C

Dimensions	
Chip Size	0201
L	0.6mm +/-0.03mm
W	0.3mm +/-0.03mm
T	0.3mm +/-0.03mm
B	0.15mm +/-0.05mm

Packaging Specifications	
Packaging	T&R
Packaging Quantity	15000