


Z0603C800ASMST

Aliases (Z0603C800ASMST)

Obsolete

KEMET, Z-SMS, Ferrite Beads, Noise Suppression, 100 mOhms

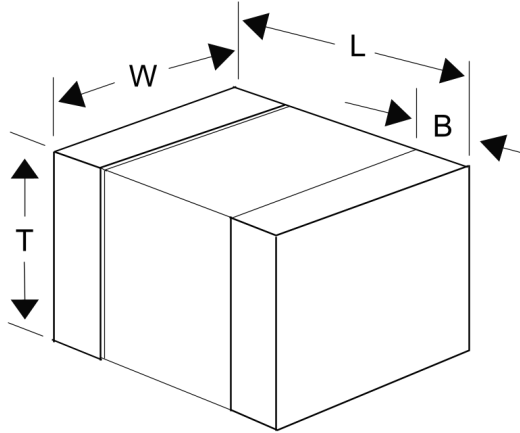

Click [here](#) for the 3D model.

General Information	
Series	Z-SMS
Style	SMD Chip
Description	Chip Bead Signal Line
Features	Suppresses The XL Component; Helps Stop The Reduction Of The Wave-Form Integrity
RoHS	Yes
Notes	Not recommended for new designs, please see Z0603C600BPWZT, Z0603C600GPWZT, Z0603C101BPWZT for replacement.

Specifications	
Impedance	80 Ohms (100 mHz)
Impedance Tolerance	25%
Ripple Current	600 mA (MAX)
Temperature Range	-55/+125°C

Dimensions	
Chip Size	0603
L	1.6mm +/-0.15mm
W	0.8mm +/-0.15mm
T	0.8mm +/-0.15mm
B	0.3mm +/-0.2mm

Packaging Specifications	
Packaging	T&R
Packaging Quantity	4000

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.