SIEMENS

Data sheet 3RT2916-1GA00



Additional load block, 50/60 Hz AC, 180 ... 255 V, for contactor relays and motor contactors Size S00

General technical data		
product brand name		SIRIUS
product designation		plug-in additional load module
size of contactor		S00
ambient temperature		
● during storage	°C	-40 ... +80
● during operation	°C	-25 ... +60
Control circuit/ Control		
type of voltage of the control supply voltage		AC
control supply voltage frequency		
● 1 rated value	Hz	50
● 2 rated value	Hz	60
control supply voltage 1		
● at AC		
— at 50 Hz	V	180 ... 255
— at 60 Hz	V	255 ... 180
Installation/ mounting/ dimensions		
mounting position		any
fastening method		clip-on
width	mm	28
height	mm	46
depth	mm	9
Certificates/ approvals		
certificate of suitability		CE / UL / CSA / CCC

General Product Approval	EMC	Declaration of Conformity
		Miscellaneous

Test Certificates	Shipping Approval	other

Subject to change without notice
© Copyright Siemens

Special Test Certificate


Confirmation

other	Railway
	Vibration and Shock


Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2916-1GA00
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2916-1GA00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RT2916-1GA00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2916-1GA00&lang=en

Subject to change without notice
© Copyright Siemens

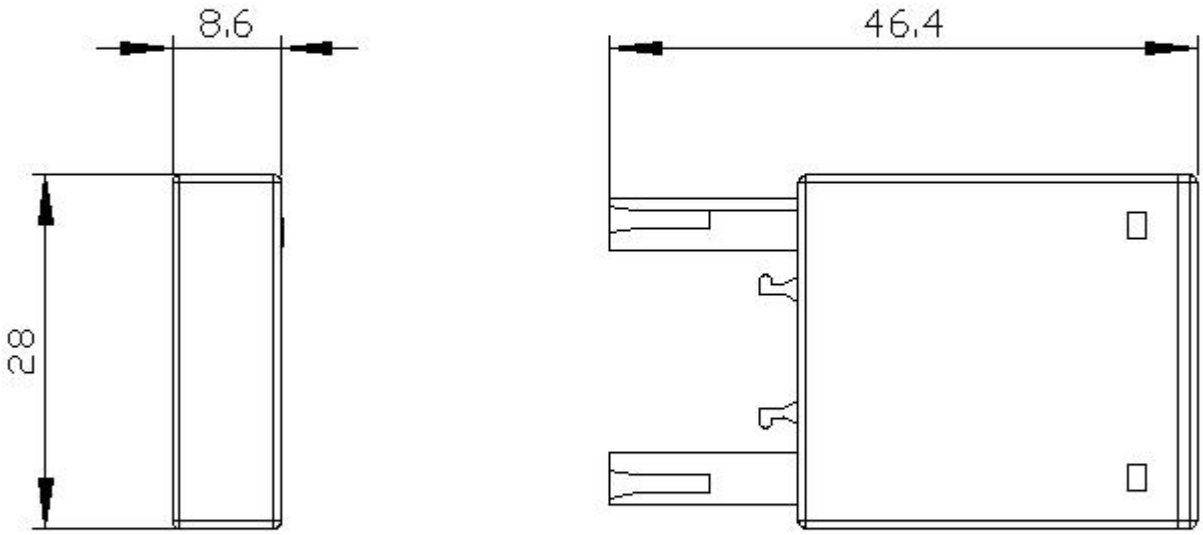

Subject to change without notice
© Copyright Siemens

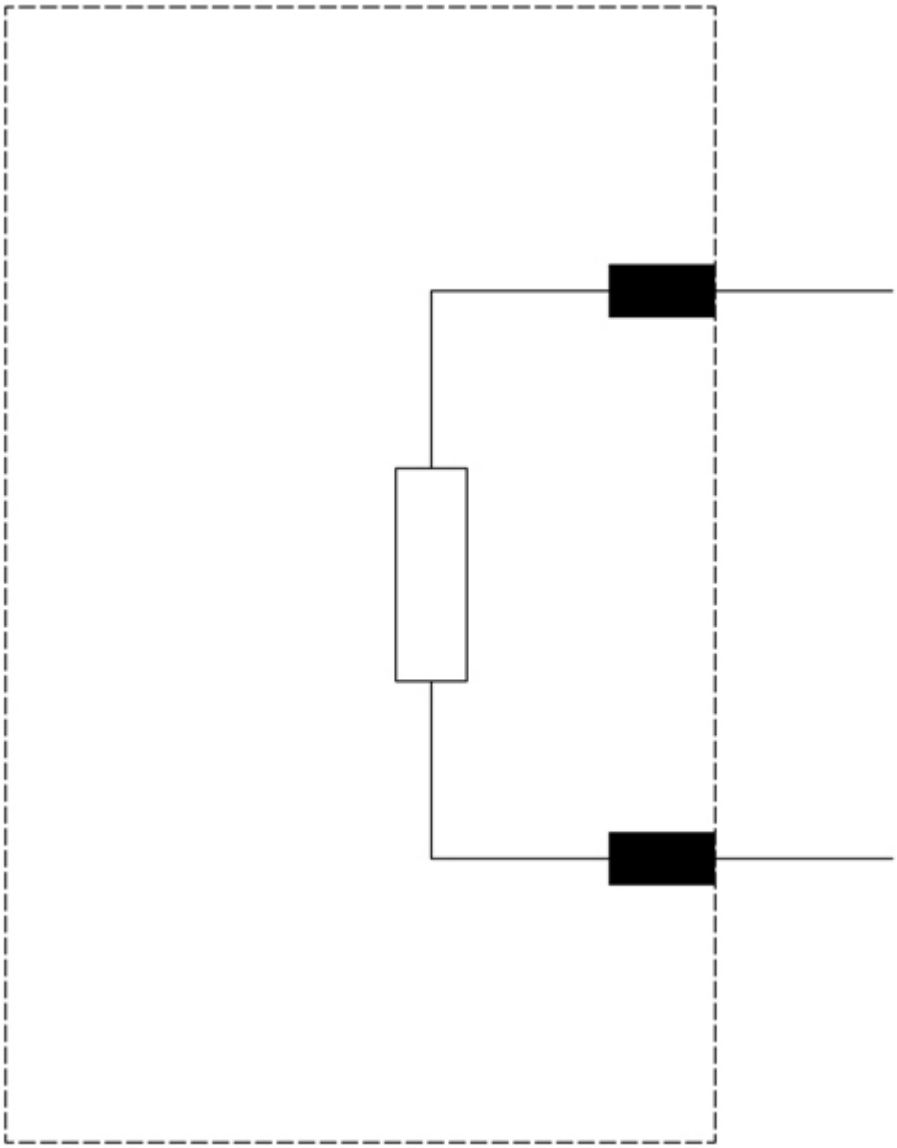

last modified: 5/15/2020

Subject to change without notice
© Copyright Siemens