




Screw Terminal Blocks

500/12 31

terminal block, 12 pole, insulating material: PA, cross-section rating: 2.5 mm², pin spacing: 10.00 mm, mounting hole diameter: 3.1 mm, fixing: screw, voltage rating: 450 V, current rating: 24 A

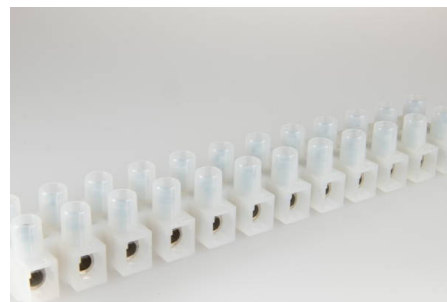

Order Info

reference number (ref.no.)	122212
PU	50
EAN	4028012102365

Type

type	terminal block
number of poles	12 pole
clamping units per pole	1
colour	natural
cross-section rating	2.5 mm ²

Technical Data

voltage rating	450 V
current rating	24 A
insulating material	PA
contact material	brass
core cross-section min.	0.5 mm ²
core cross-section max.	6.0 mm ²
flammability rating	V-2
min. ambient temperature	-40 °C
max. ambient temperature operation	85 °C
type of conductor solid	yes
type of conductor flexible	yes
type of conductor stranded	yes
stripping length	7.0-7.5 mm
mounting hole diameter	3.1 mm
pin spacing	10.00 mm
fixing	screw

Approvals

acc. to EN 60998	Download PDF
------------------	------------------------------

acc. to UL	Download PDF
-------------------	------------------------------

acc. to CSA	Download PDF
--------------------	------------------------------

Accessories

500 BZ/12	191312
------------------	--------

ABK 405/12	193212
-------------------	--------

ZEL 110	196420
----------------	--------