



MINI FRESNEL 100T

100W tunable LED fresnel manual zoom

Mini Fresnel 100T is a successor for the popular Mini Fresnel 50T, the fixture keeps the same body size as Mini Fresnel 50T, and with 2 x power output. It is a 100 watt constant output LED source with tunable white color. Weight only 2.3kgs. It is a perfect product for places where the space is limited but powerful output is needed. Barndoor can be used for shape of light.


Key features:

- 100Watt WW + 100W CW COB white LED
- 2700K - 6500K tunable color temperature
- Average CRI≥95, R9 90+
- Soft and even wash effect
- 25° - 60° manual zoom
- Smooth dimming, flicker free
- Knob, DMX and RDM controls
- Light weight, super compact size
- Powercon in and out connection


Application:

- Broadcast, HD studio
- Theatre, church
- Film shooting
- Museum
- Exhibition lighting


Accessories:



Barn door




Gel frame

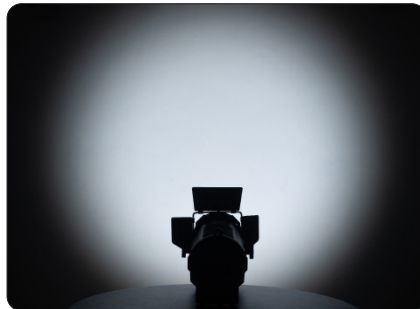


Photometric

6000K(lx)	8970	2460	1060	605	398	307	205	165	135	109
5600K(lx)	9130	2480	1090	625	408	323	211	170	137	116
2700K(lx)	7820	2080	927	526	346	267	179	142	116	94

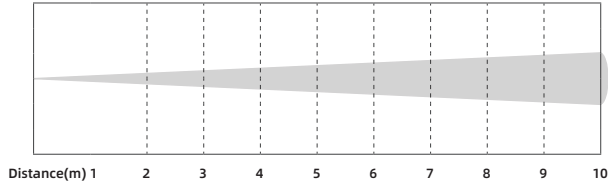

25°


Color Rendition - 4000K

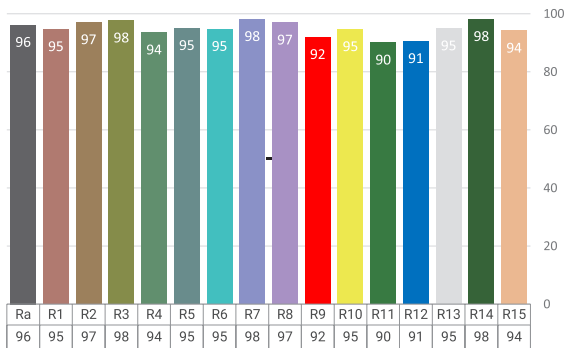


Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	100Watt WW + 100W CW LED
Color temperature:	2700K - 6500K
Zoom range:	25° - 60° manual zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	Knob, DMX and RDM controls

6000K(lx)	4120	1110	501	286	191	153	104	82.4	66.6	58.4
5600K(lx)	4240	1140	510	294	197	159	108	84.5	69.4	58.8
2700K(lx)	3590	962	433	250	166	130	89.7	71.6	57.4	48.2

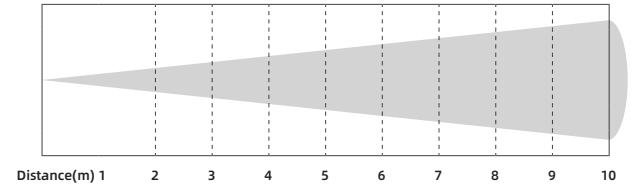

60°

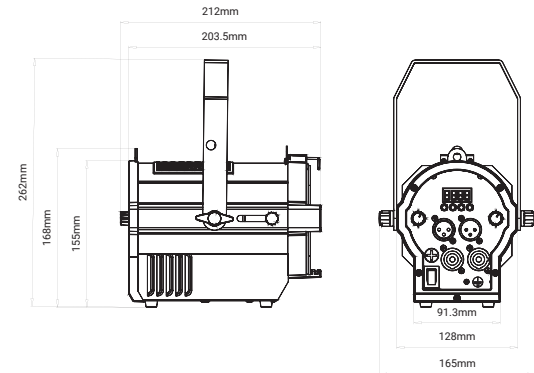

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	212 x 165 x 262mm(8.4 x 6.5 x 10.3in)
N.W.:	2.3kg(barn door included)
G.W.:	2.8kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20