



光谱图

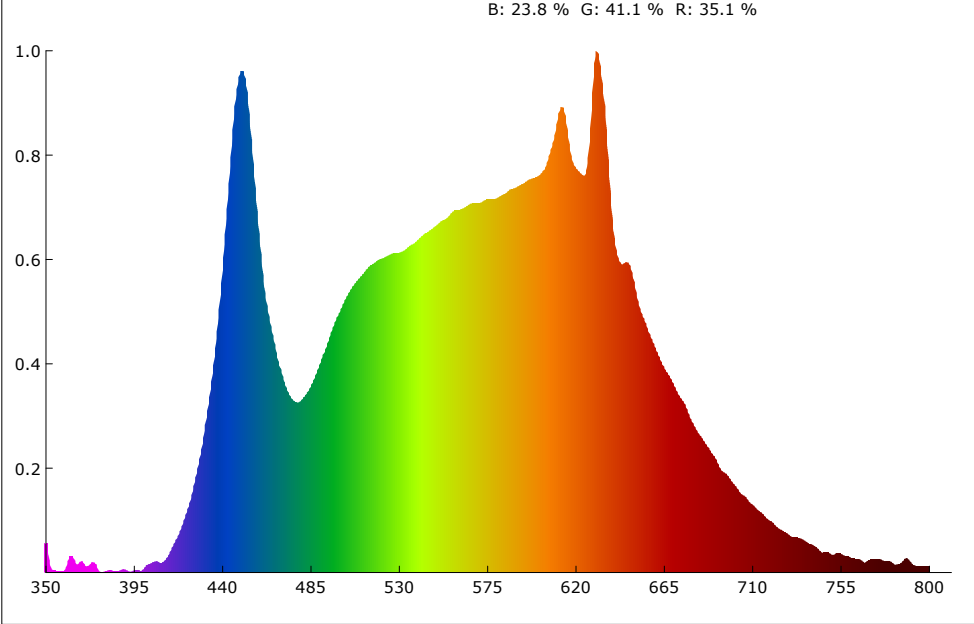

SDCM

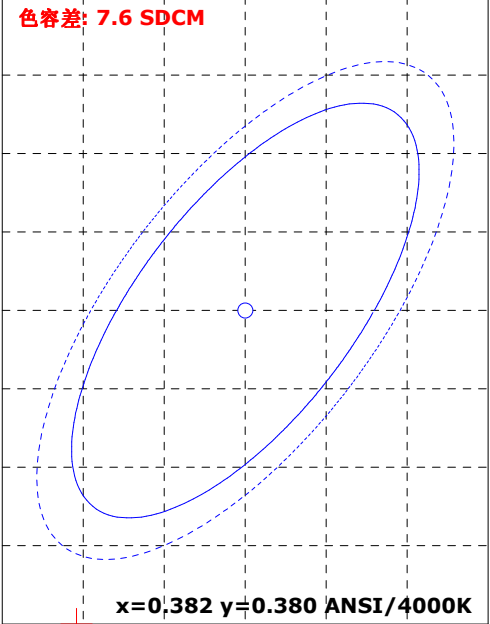

颜色参数:

坐标x: 0.3714 坐标y: 0.3596 坐标u: 0.2260 坐标v: 0.3283 坐标u': 0.2260 坐标v': 0.4924
红色比: 35.1 % 绿色比: 41.1 % 蓝色比: 23.8 % 光通量红色比: 19.6 % 光通量绿色比: 77.5 % 光通量蓝色比: 2.9 %

显色指数: 94.9 AvgR: 93.0
R1: 97.1 R2: 97.2 R3: 95.6 R4: 95.2 R5: 96.4 R6: 94.1 R7: 94.3 R8: 90.0
R9: 74.5 R10: 92.5 R11: 95.0 R12: 81.6 R13: 97.5 R14: 97.1 R15: 96.2


色温: 4134 K 光通量: 178.889 lm 峰值波长: 631.5 nm 色容差: 7.6
明暗视觉比: 1.8 中心波长: 576.6 nm 主波长: 582.7 nm 质心波长: 565.4 nm
半宽度: 152.7 nm 色偏差: -0.00549 色纯度: 19.4 % 色质指数: 84.9
LER(TM-30): 294.5 辐射功率: 607.4 mw 色域指数(Rg): 101.6 逼真度(Rf): 90.9
红光辐射功率: 205.1 mw 近红辐射功率: 19.5 mw 远红辐射功率: 1.3 mw

电参数:





光效: 17.7 Lm/W 能效: 19.2 能效等级: G
电压: 222.4 V 电流: 0.049 A 功率: 10.130 W 功率因素: 0.920

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/12/13
备注:


Rf: 90.9 CCT: 4134K u': 0.2260
Rg: 101.6 LER: 294.5 Duv: -0.00549 v': 0.4924

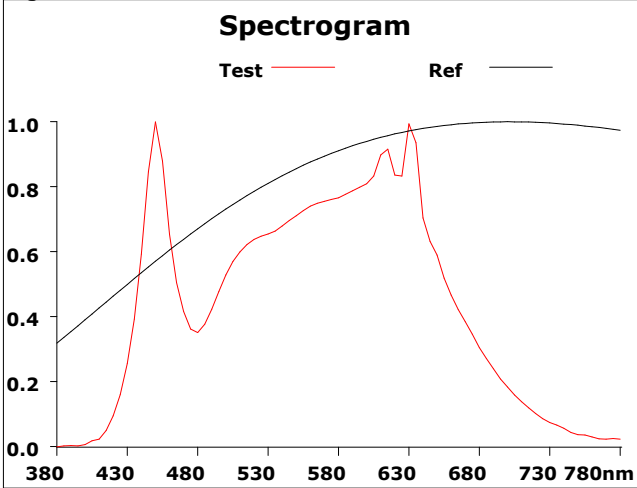


500			
Hue Bin	Rf	Chroma	Hue
1	92.1	-3.8%	-0.5%
2	93.7	-2.0%	2.4%
3	87.9	-0.7%	5.6%
4	92.2	0.6%	3.8%
5	91.6	1.3%	2.8%
6	93.8	3.6%	0.7%
7	96.7	0.7%	-0.9%
8	95.4	-0.5%	0.1%
9	94.2	-1.3%	2.8%
10	89.3	-2.3%	5.1%
11	84.7	2.7%	8.7%
12	88.0	4.4%	4.2%
13	90.4	6.1%	-3.0%
14	93.8	3.4%	-0.3%
15	88.5	2.4%	-7.5%
16	87.5	0.3%	-7.2%

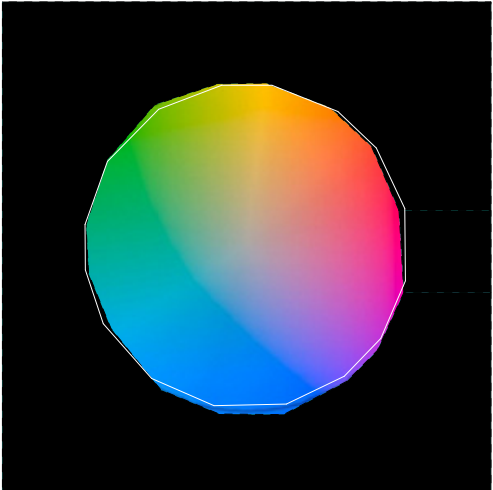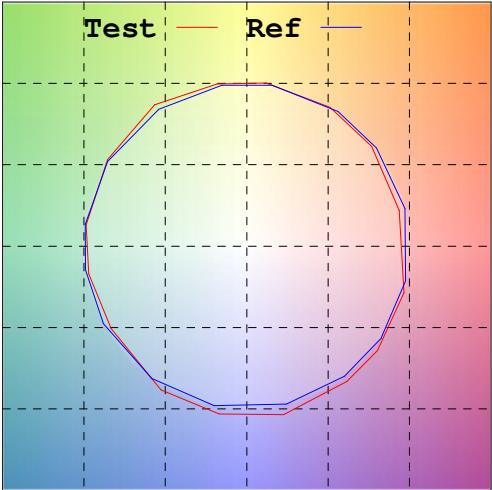
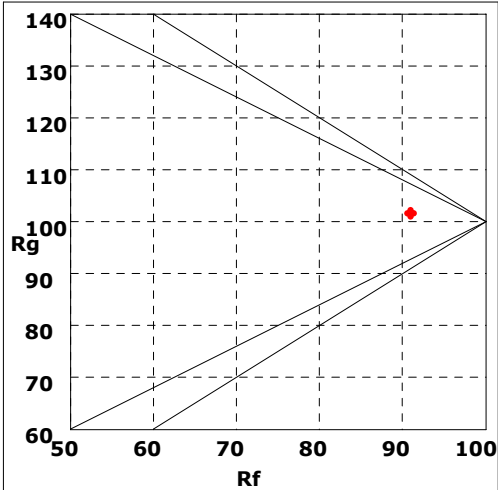
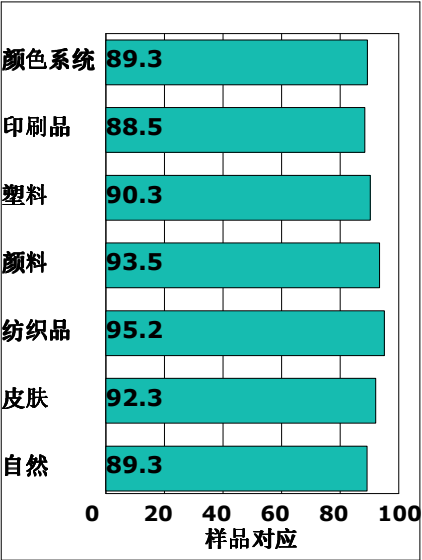


Rf by Bue

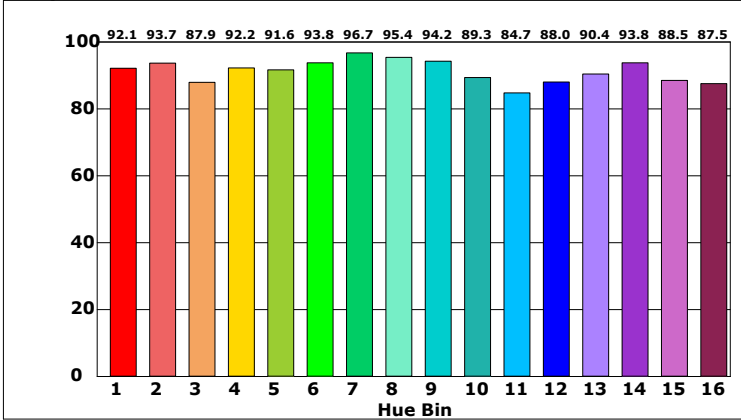


Chroma by Bue

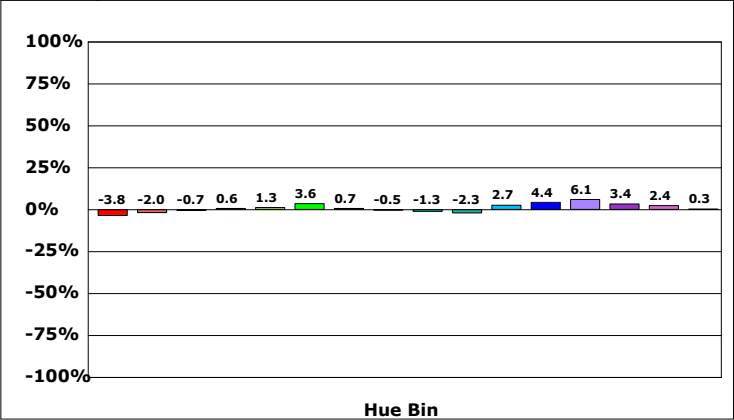


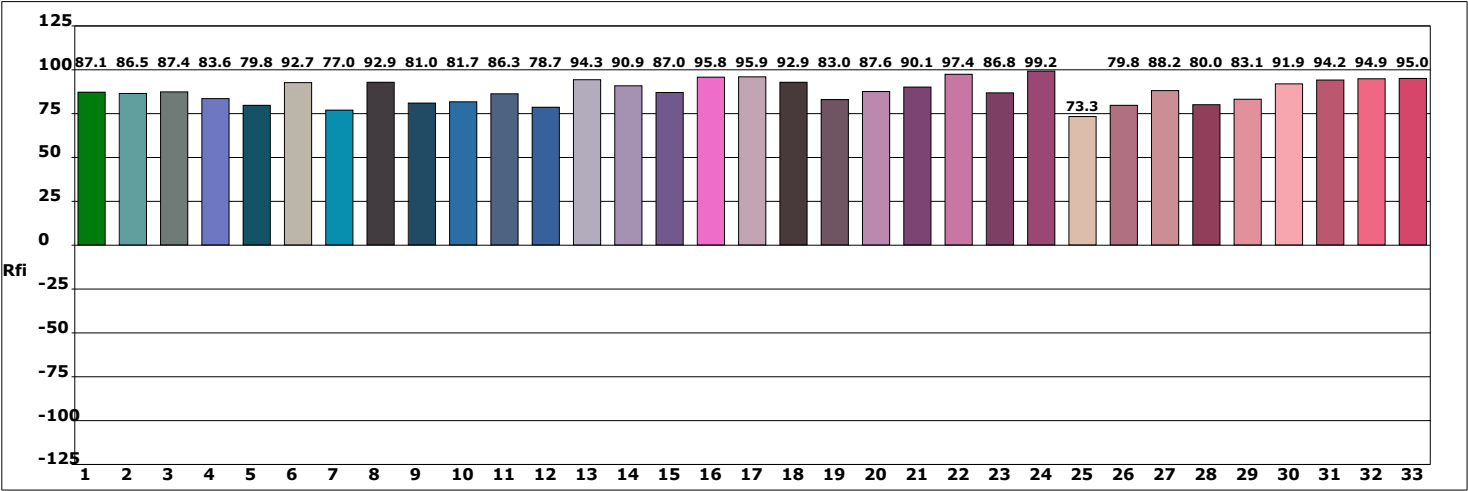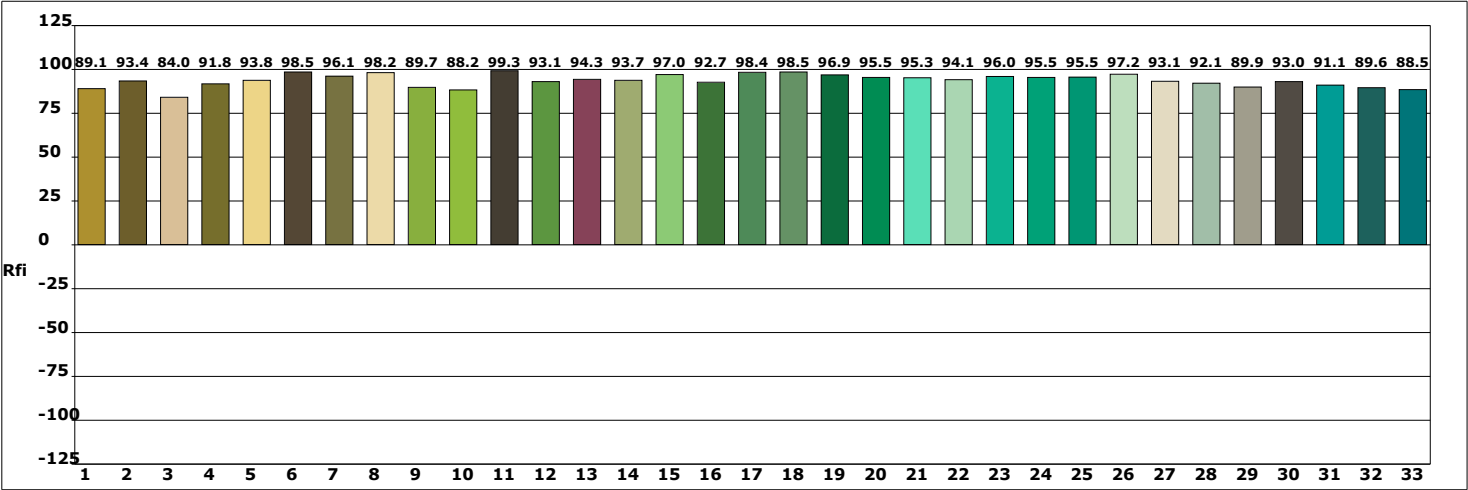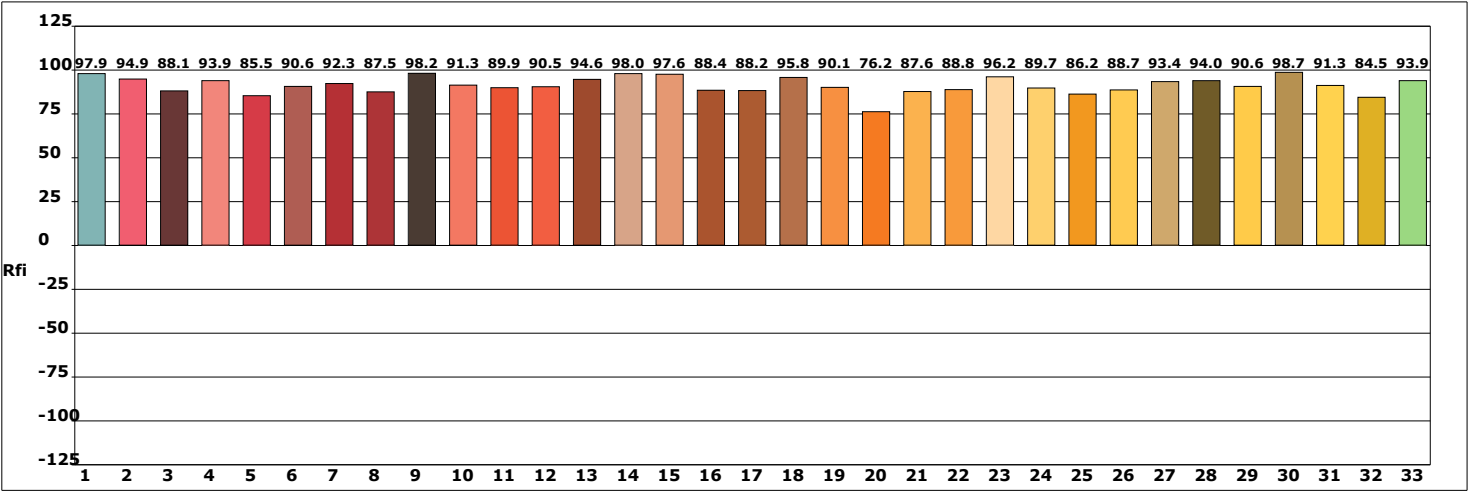

光谱图

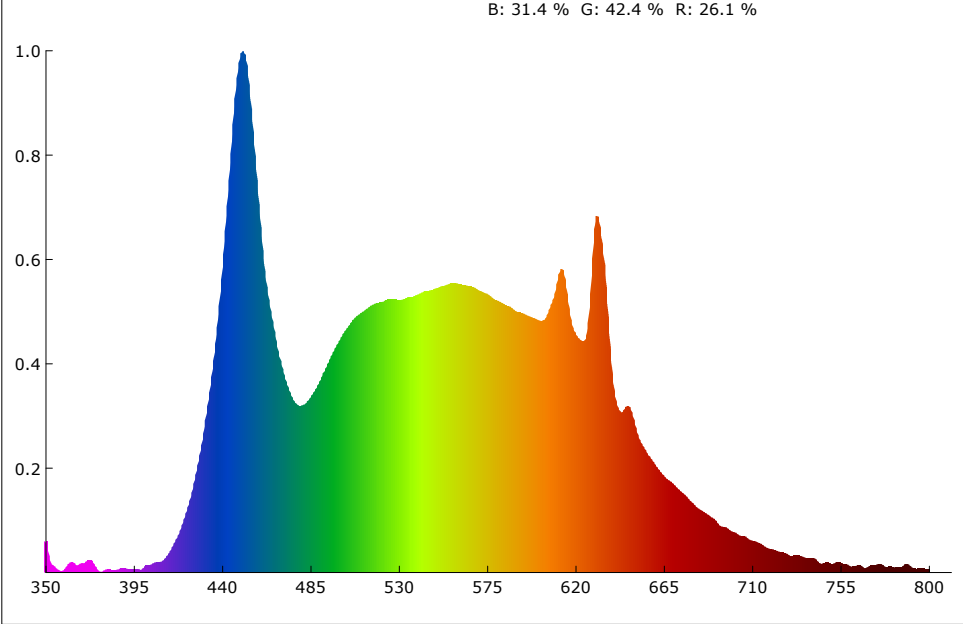

SDCM

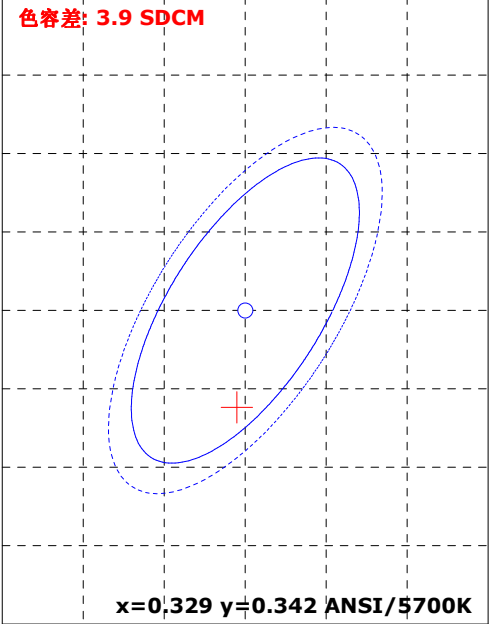

颜色参数:

坐标x: 0.3282 坐标y: 0.3355 坐标u: 0.2061 坐标v: 0.3160 坐标u': 0.2061 坐标v': 0.4740
红色比: 26.1 % 绿色比: 42.4 % 蓝色比: 31.4 % 光通量红色比: 15.8 % 光通量绿色比: 80.3 % 光通量蓝色比: 3.9 %


显色指数: 92.6 AvgR: 89.6
R1: 93.7 R2: 94.1 R3: 92.5 R4: 93.7 R5: 93.8 R6: 90.9 R7: 94.0 R8: 88.5
R9: 66.1 R10: 84.8 R11: 93.8 R12: 75.7 R13: 93.8 R14: 95.6 R15: 93.0

色温: 5697 K 光通量: 188.838 lm 峰值波长: 450.6 nm 色容差: 3.9
明暗视觉比: 2.2 中心波长: 451.6 nm 主波长: 497.3 nm 质心波长: 546.7 nm
半宽度: 25.9 nm 色偏差: -0.00098 色纯度: 1.6 % 色质指数: 87.7
LER(TM-30): 295.3 辐射功率: 639.5 mw 色域指数(Rg): 100.3 逼真度(Rf): 89.2
红光辐射功率: 162.6 mw 近红辐射功率: 13.0 mw 远红辐射功率: 1.1 mw







电参数:

光效: 18.8 Lm/W 能效: 20.4 能效等级: G
电压: 222.5 V 电流: 0.049 A 功率: 10.070 W 功率因素: 0.920

Rf: 89.2 CCT: 5697K u': 0.2061
Rg: 100.3 LER: 295.3 Duv: -0.00098 v': 0.4740



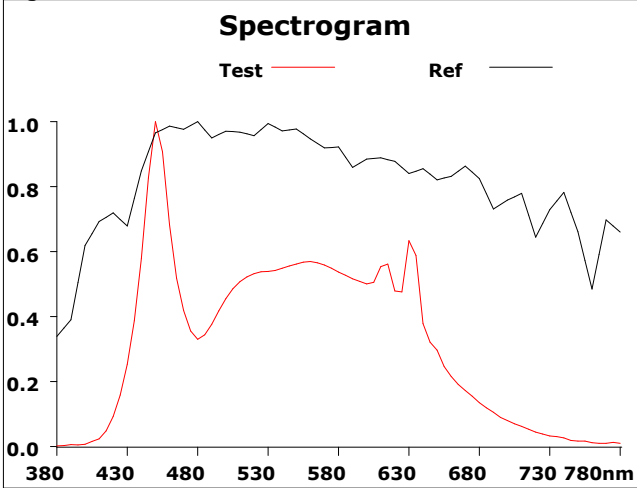


500			
Hue Bin	Rf	Chroma	Hue
1	87.9	-5.4%	-0.5%
2	91.7	-3.1%	3.1%
3	86.9	-1.6%	6.3%
4	90.2	0.4%	4.9%
5	89.1	1.2%	3.4%
6	95.0	2.9%	0.7%
7	96.5	-0.3%	-1.0%
8	93.8	-2.7%	0.3%
9	91.0	-4.1%	5.3%
10	83.8	-2.6%	8.5%
11	80.2	2.0%	10.7%
12	90.8	3.7%	3.7%
13	90.2	6.4%	-1.7%
14	90.4	4.0%	-2.6%
15	82.2	6.5%	-12.8%
16	93.3	-1.5%	-3.1%

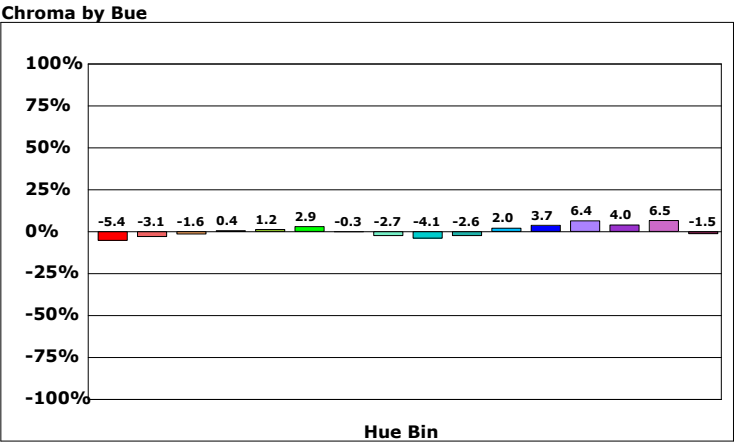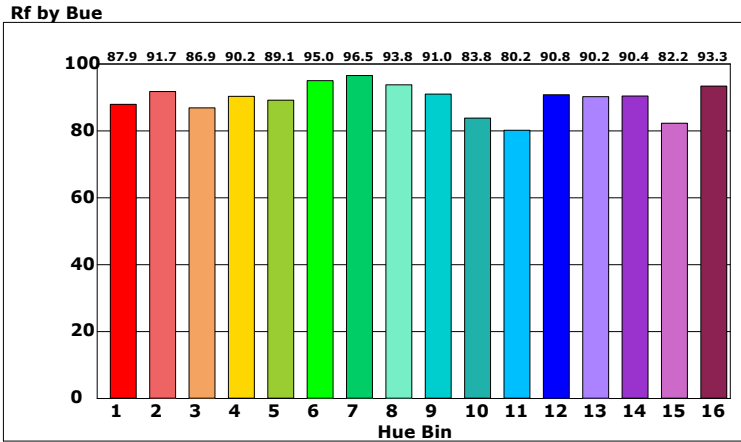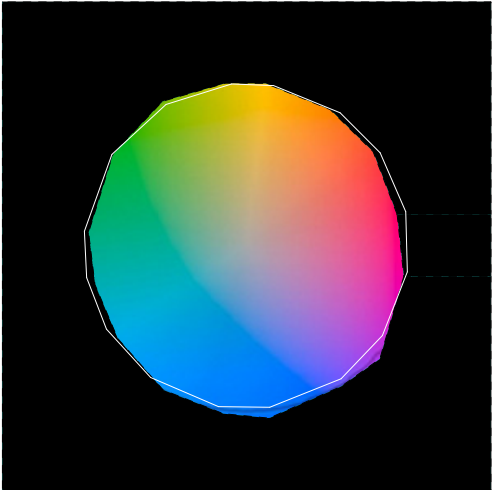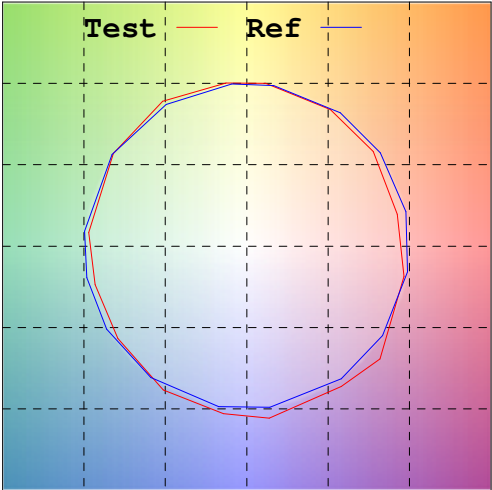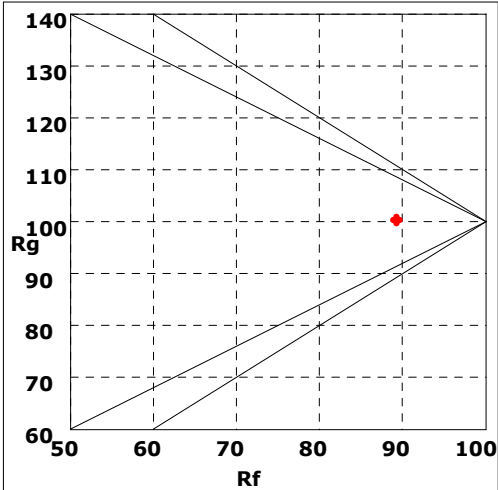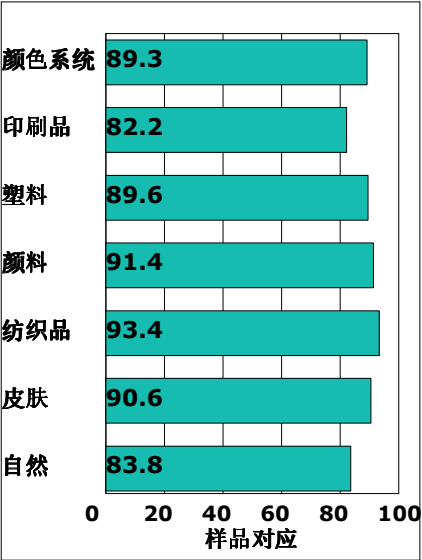


产品型号:
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:02/12/13

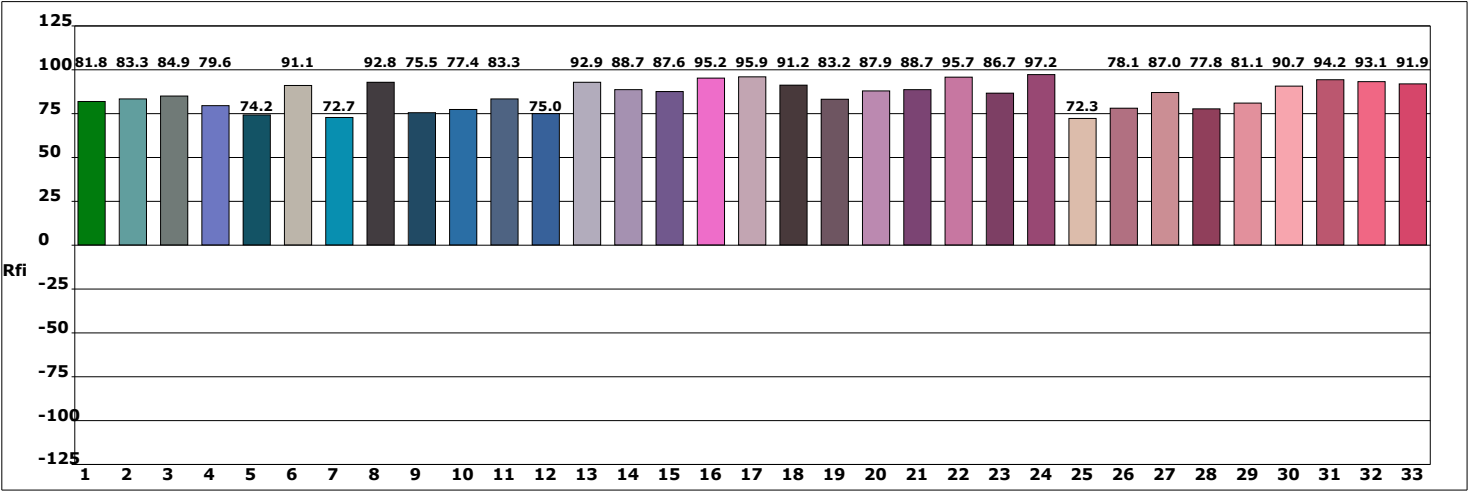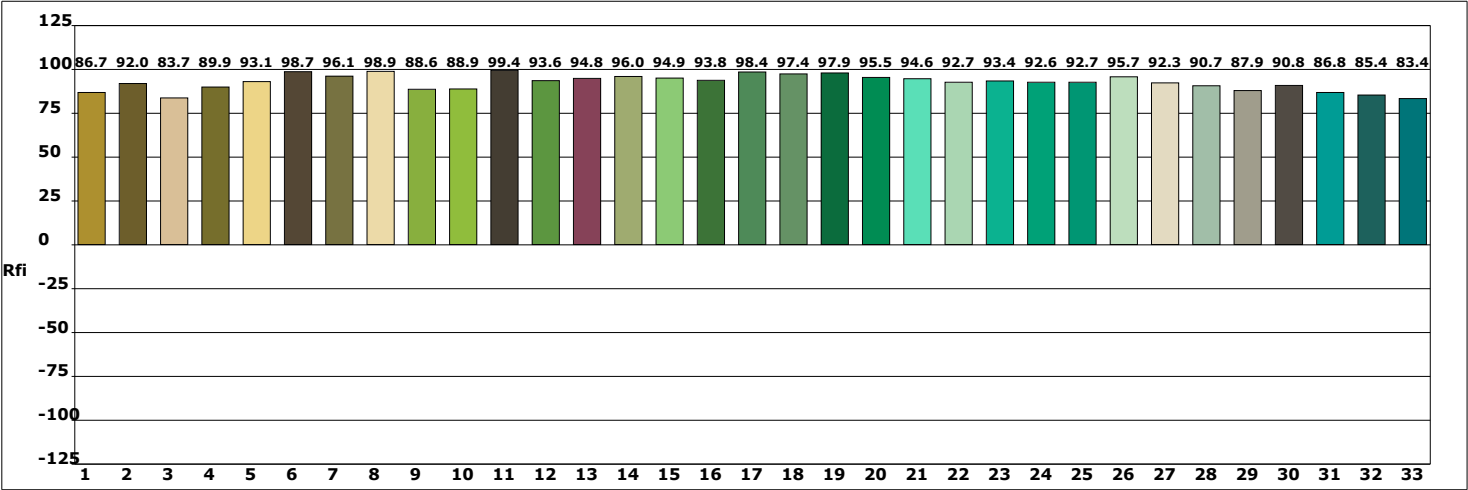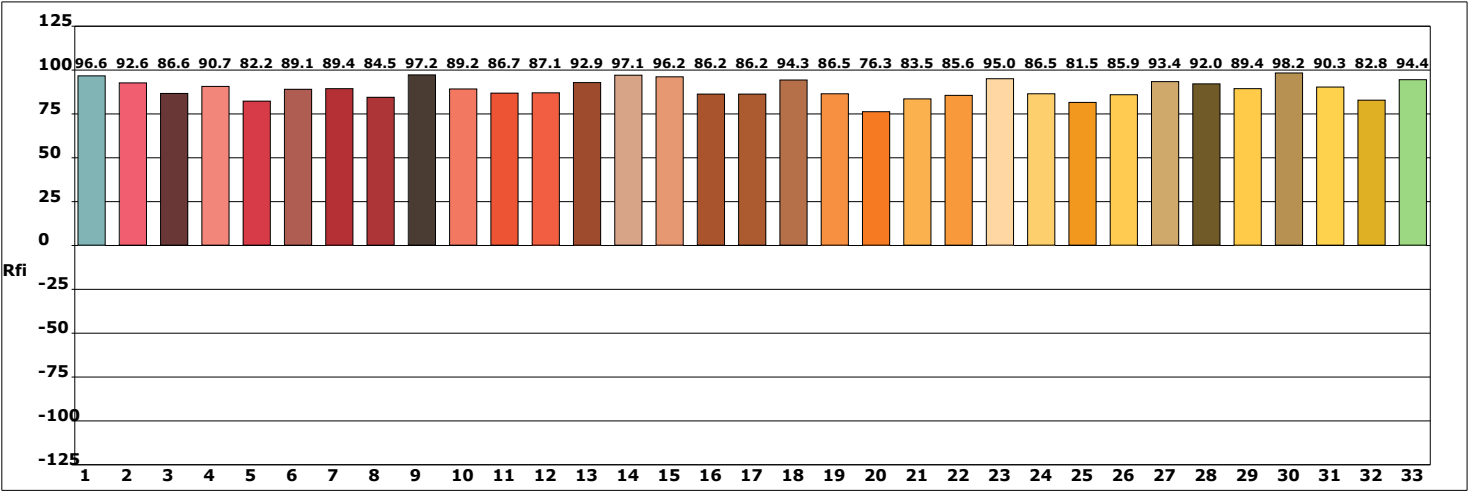

光谱图

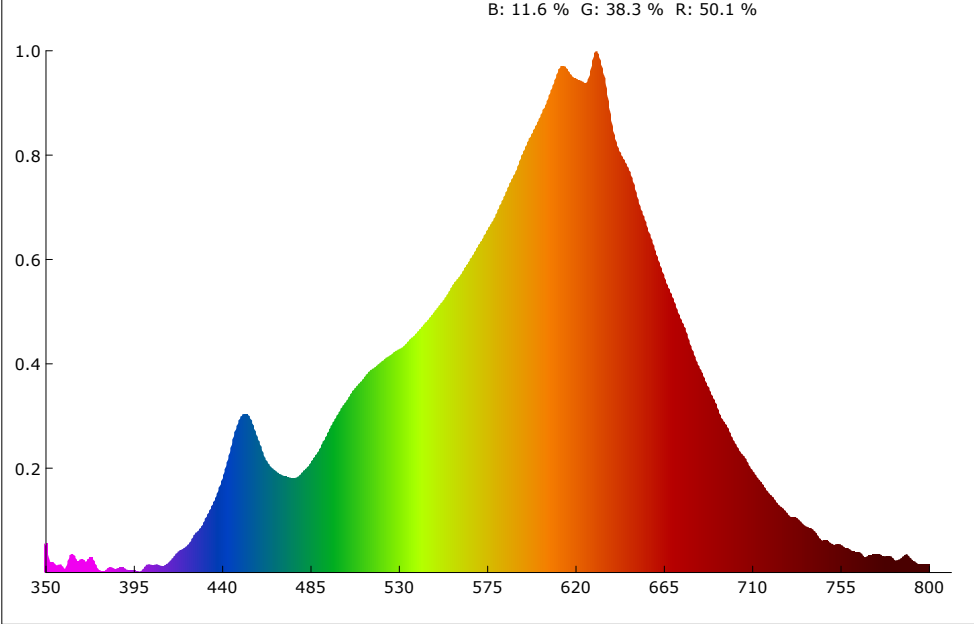

SDCM

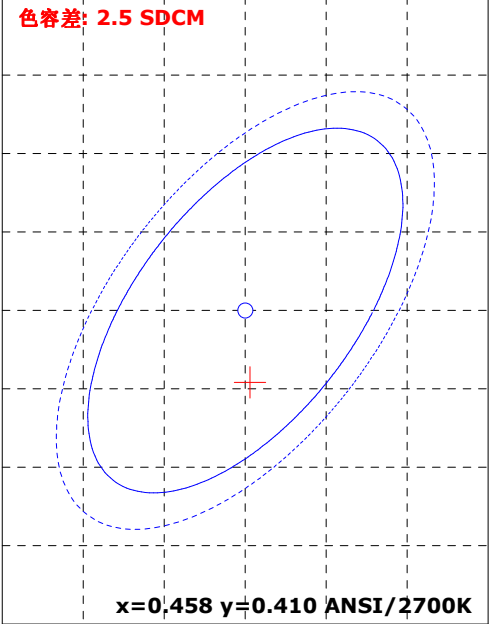

颜色参数:

坐标x: 0.4581 坐标y: 0.4055 坐标u: 0.2637 坐标v: 0.3501 坐标u': 0.2637 坐标v': 0.5252
红色比: 50.1 % 绿色比: 38.3 % 蓝色比: 11.6 % 光通量红色比: 26.0 % 光通量绿色比: 72.4 % 光通量蓝色比: 1.6 %

显色指数: 92.3 AvgR: 90.5
R1: 93.1 R2: 97.6 R3: 97.6 R4: 93.7 R5: 94.6 R6: 96.7 R7: 88.6 R8: 77.2
R9: 53.0 R10: 94.7 R11: 96.0 R12: 93.2 R13: 94.4 R14: 99.5 R15: 87.5


色温: 2683 K 光通量: 151.564 lm 峰值波长: 630.5 nm 色容差: 2.5
明暗视觉比: 1.3 中心波长: 610.3 nm 主波长: 584.9 nm 质心波长: 595.0 nm
半宽度: 123.2 nm 色偏差: -0.00174 色纯度: 59.2 % 色质指数: 87.2
LER(TM-30): 287.3 辐射功率: 527.6 mw 色域指数(Rg): 99.9 逼真度(Rf): 91.5
红光辐射功率: 247.9 mw 近红辐射功率: 28.4 mw 远红辐射功率: 1.8 mw

电参数:





光效: 15.0 Lm/W 能效: 16.4 能效等级: G
电压: 222.5 V 电流: 0.049 A 功率: 10.090 W 功率因素: 0.920

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/12/13
备注:


Rf: 91.5 CCT: 2683K u': 0.2637
Rg: 99.9 LER: 287.3 Duv: -0.00174 v': 0.5252

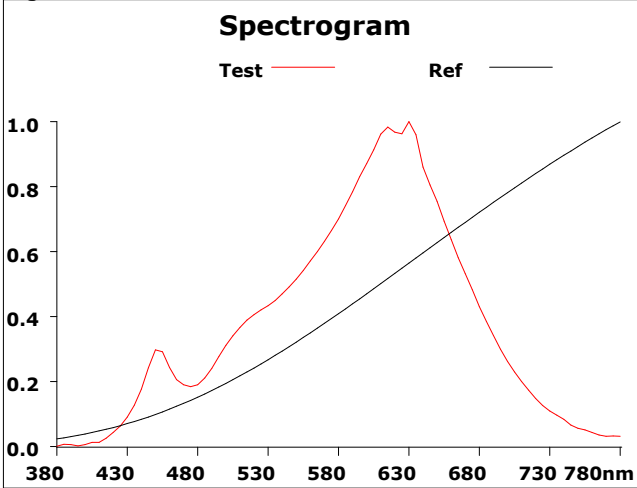


500			
Hue Bin	Rf	Chroma	Hue
1	88.8	-5.6%	-0.1%
2	90.2	-3.4%	3.6%
3	88.1	-0.8%	5.6%
4	93.7	1.1%	2.8%
5	95.6	2.5%	2.3%
6	93.4	3.7%	0.4%
7	93.2	0.4%	-3.5%
8	96.8	0.5%	-1.5%
9	96.4	-1.4%	0.1%
10	94.5	-0.7%	2.3%
11	93.1	0.8%	3.8%
12	88.9	4.4%	-2.1%
13	87.8	3.3%	-7.9%
14	85.5	2.3%	-10.7%
15	89.5	-1.5%	-5.8%
16	84.9	-5.0%	-9.3%

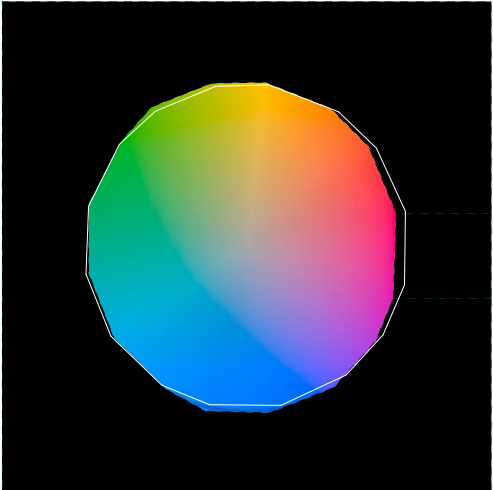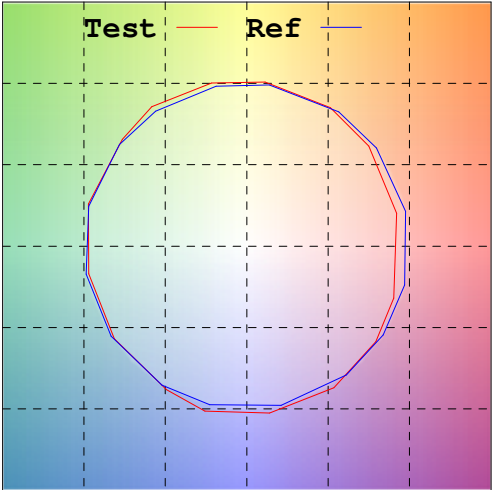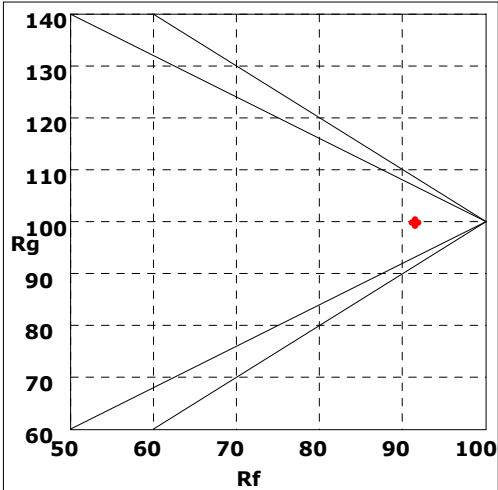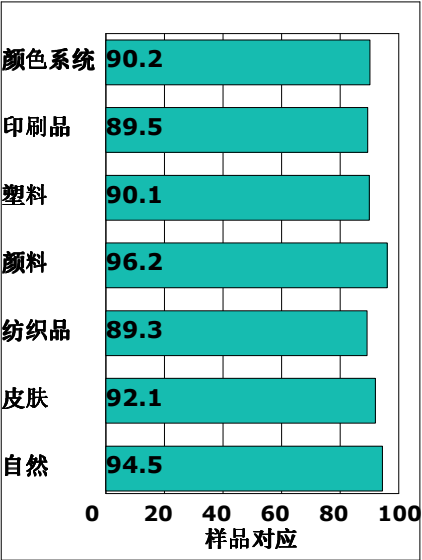

Rf by Bue

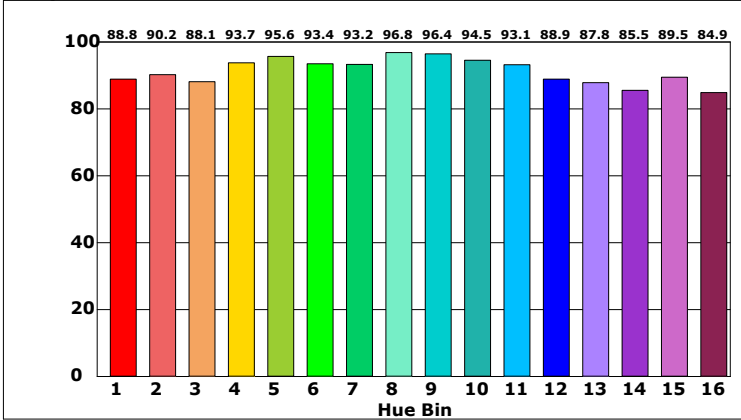

Chroma by Bue

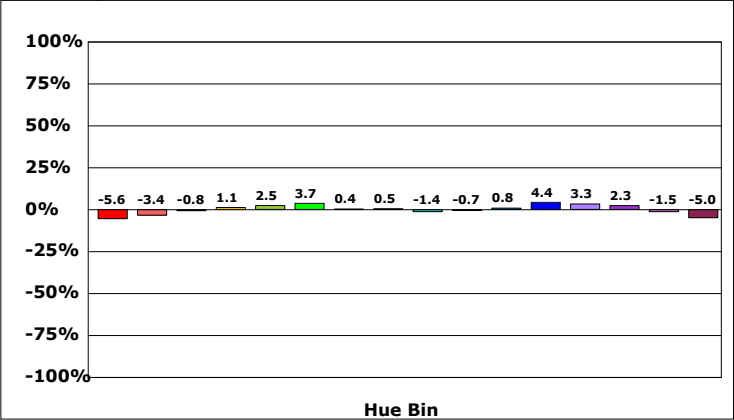

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:02/12/13

