



光谱图

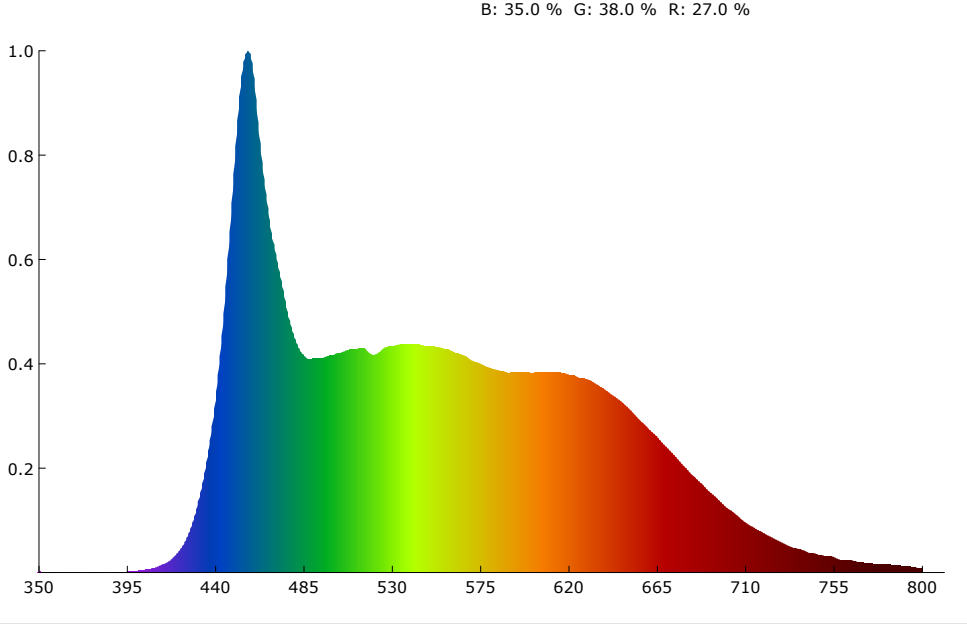

SDCM

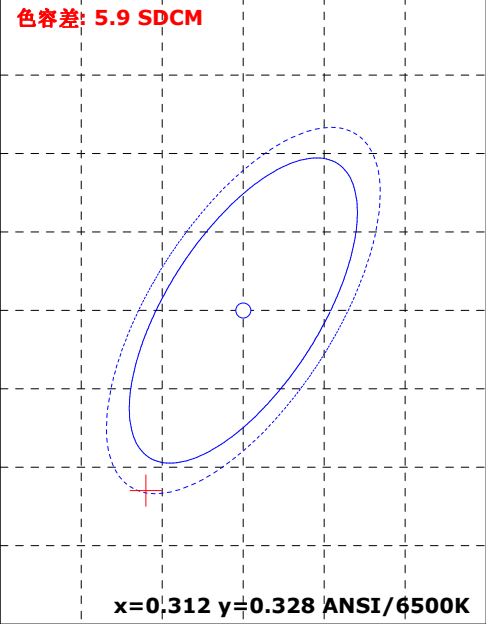

颜色参数:

坐标x: 0.3063 坐标y: 0.3167 坐标u: 0.1980 坐标v: 0.3071 坐标u': 0.1980 坐标v': 0.4606
红色比: 27.0 % 绿色比: 38.0 % 蓝色比: 35.0 % 光通量红色比: 15.1 % 光通量绿色比: 79.1 % 光通量蓝色比: 5.8 %

显色指数: 93.4 AvgR: 92.5
R1: 95.1 R2: 95.2 R3: 96.4 R4: 90.4 R5: 93.4 R6: 93.7 R7: 91.0 R8: 92.2
R9: 94.6 R10: 92.2 R11: 94.5 R12: 71.4 R13: 95.5 R14: 98.6 R15: 92.7


色温: 7003 K 光通量: 8101.435 lm 峰值波长: 457.4 nm 色容差: 5.9
明暗视觉比: 2.5 中心波长: 460.9 nm 主波长: 483.3 nm 质心波长: 551.2 nm
半宽度: 32.1 nm 色偏差: 0.00012 色纯度: 10.5 % 色质指数: 89.0
LER(TM-30): 264.4 辐射功率: 30644.8 mw 色域指数(Rg): 96.7 逼真度(Rf): 87.2
红光辐射功率: 7950.8 mw 近红辐射功率: 1105.3 mw 远红辐射功率: 74.0 mw

电参数:





光效: 27.7 Lm/W 能效: 30.1 能效等级: G
电压: 222.1 V 电流: 1.350 A 功率: 292.700 W 功率因素: 0.975

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 87.2 CCT: 7003K u': 0.1980
Rg: 96.7 LER: 264.4 Duv: 0.00012 v': 0.4606

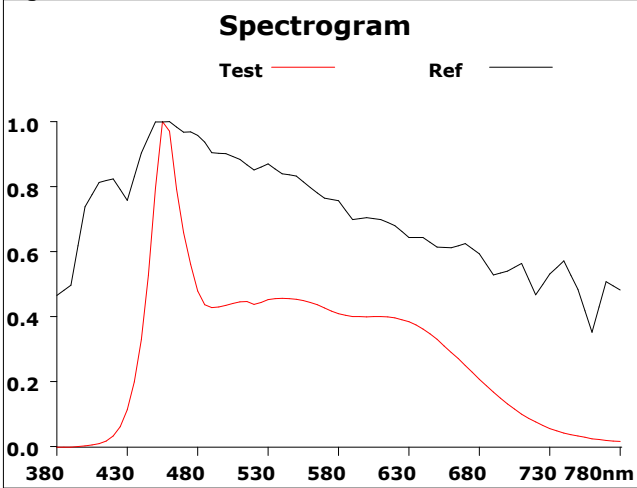


500			
Hue Bin	Rf	Chroma	Hue
1	89.5	-1.1%	2.6%
2	94.4	0.8%	1.5%
3	93.1	-0.3%	-3.5%
4	90.2	-2.7%	-4.1%
5	81.0	-10.4%	-4.4%
6	88.5	-7.3%	-0.5%
7	89.0	-6.0%	3.0%
8	81.6	-3.9%	9.2%
9	82.7	-0.9%	14.0%
10	82.3	3.1%	11.3%
11	86.3	4.8%	3.7%
12	89.3	1.7%	-5.6%
13	90.2	3.0%	-4.5%
14	79.3	8.2%	-6.3%
15	85.6	1.9%	-6.3%
16	92.0	-2.7%	2.7%

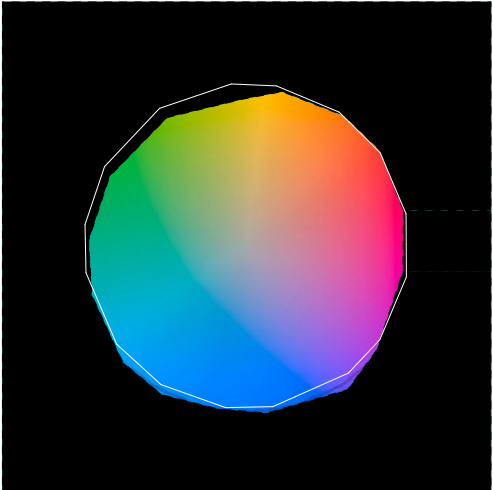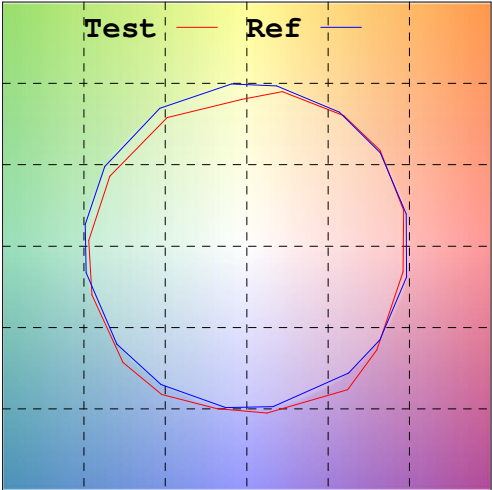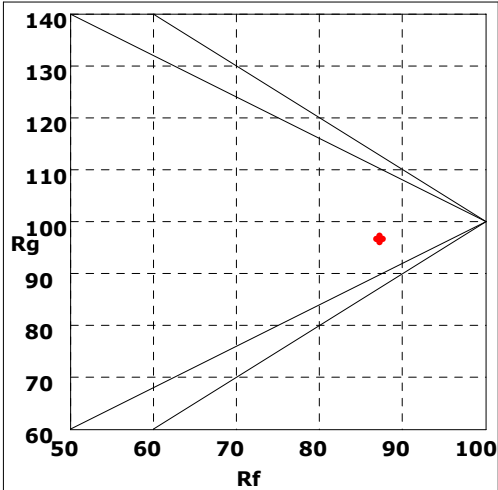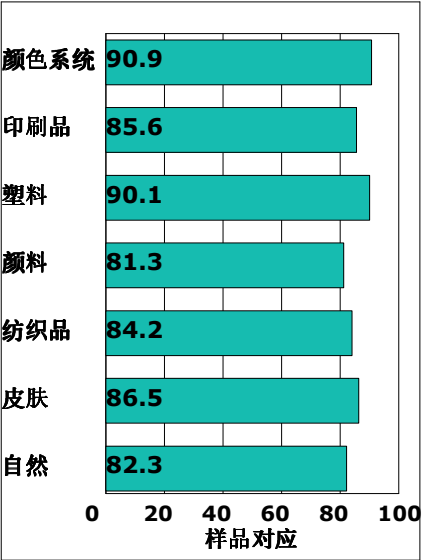




Rf by Bue

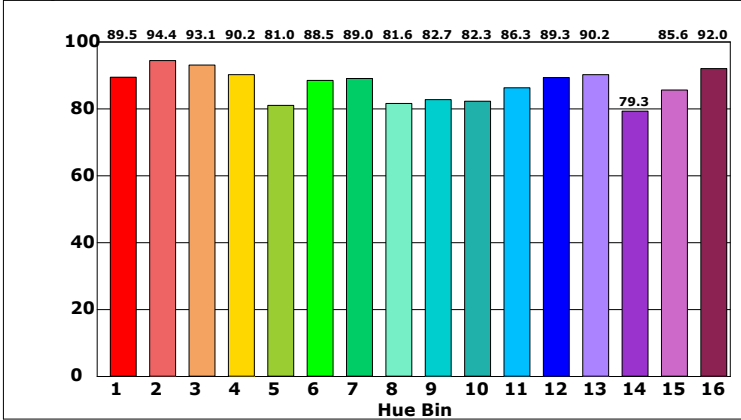

Chroma by Bue

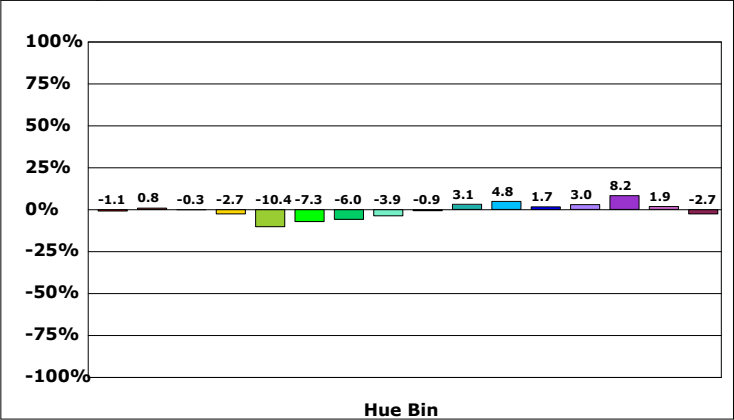


产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:

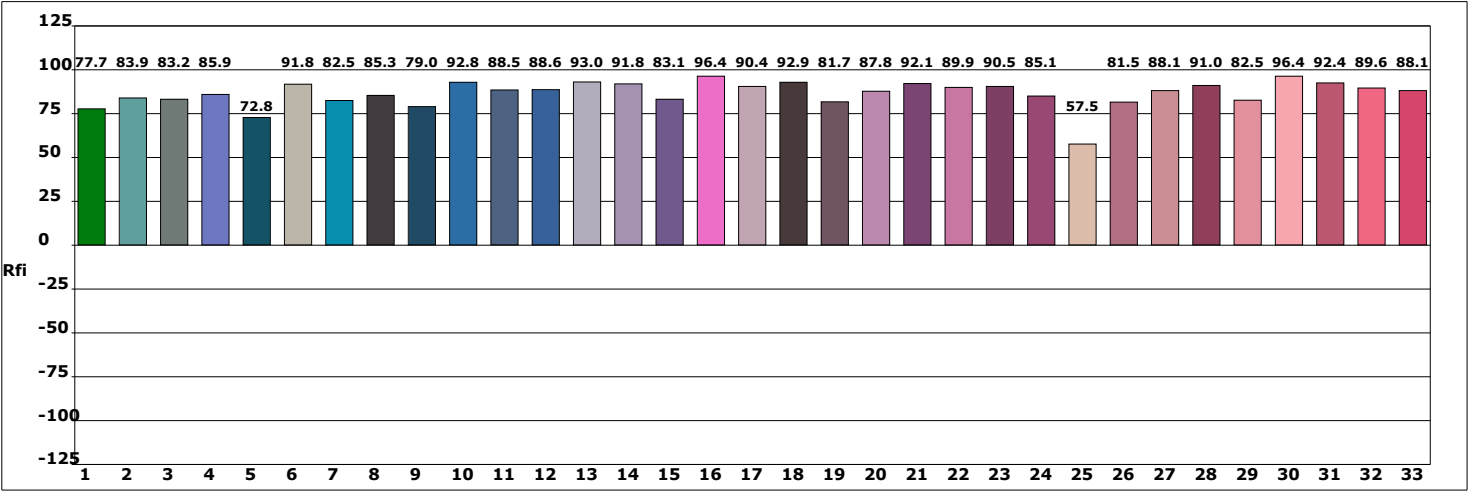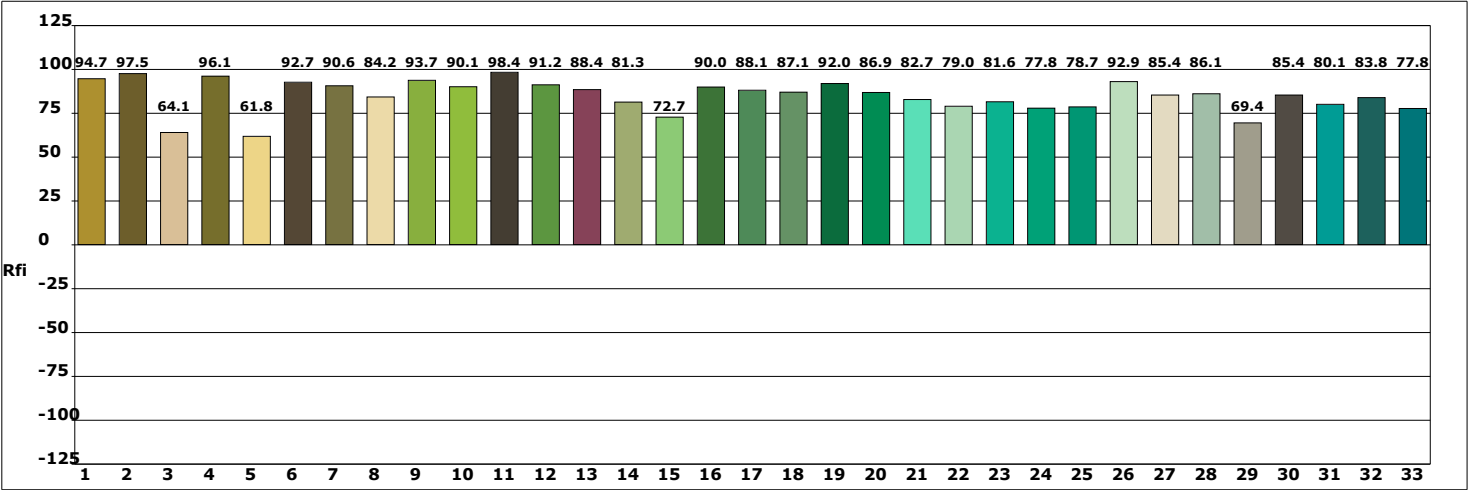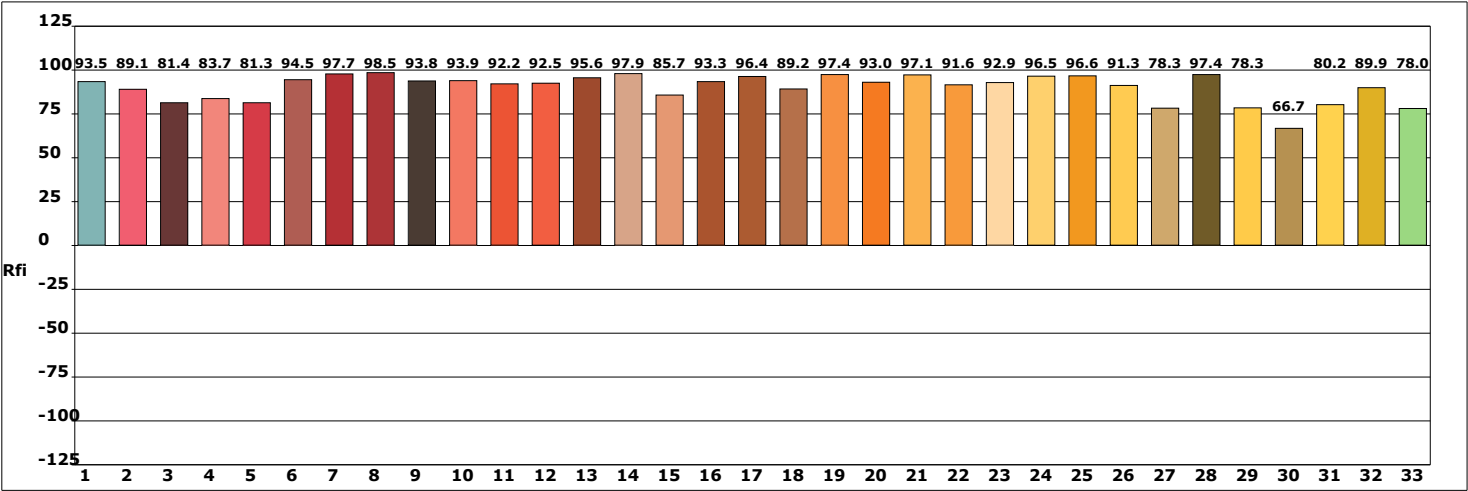


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

光谱图

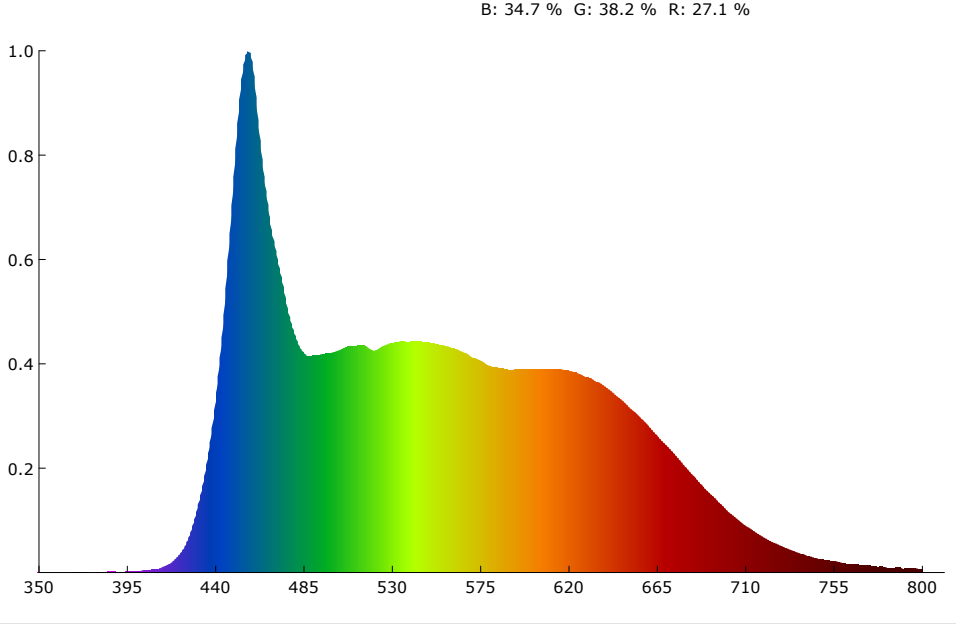

SDCM

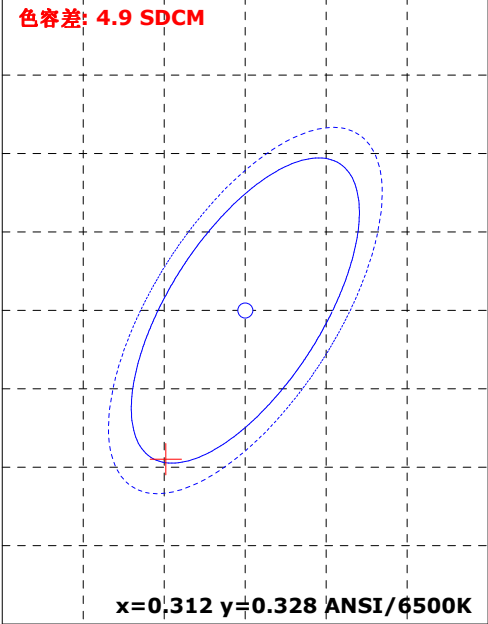

颜色参数:

坐标x: 0.3074 坐标y: 0.3187 坐标u: 0.1980 坐标v: 0.3079 坐标u': 0.1980 坐标v': 0.4619
红色比: 27.1 % 绿色比: 38.2 % 蓝色比: 34.7 % 光通量红色比: 15.1 % 光通量绿色比: 79.1 % 光通量蓝色比: 5.8 %

显色指数: 93.3 AvgR: 92.5
R1: 95.2 R2: 95.2 R3: 96.1 R4: 90.2 R5: 93.6 R6: 93.9 R7: 90.6 R8: 91.8
R9: 95.2 R10: 92.1 R11: 94.4 R12: 71.5 R13: 95.7 R14: 98.4 R15: 92.9


色温: 6916 K 光通量: 11574.811 lm 峰值波长: 457.4 nm 色容差: 4.9
明暗视觉比: 2.5 中心波长: 461.1 nm 主波长: 484.1 nm 质心波长: 550.5 nm
半宽度: 32.1 nm 色偏差: 0.00057 色纯度: 9.9 % 色质指数: 89.1
LER(TM-30): 267.2 辐射功率: 43317.6 mw 色域指数(Rg): 96.7 逼真度(Rf): 87.0
红光辐射功率: 11339.5 mw 近红辐射功率: 1356.6 mw 远红辐射功率: 74.3 mw

电参数:





光效: 39.6 Lm/W 能效: 43.1 能效等级: G
电压: 222.0 V 电流: 1.351 A 功率: 292.500 W 功率因素: 0.975

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 87.0 CCT: 6916K u': 0.1980
Rg: 96.7 LER: 267.2 Duv: 0.00057 v': 0.4619

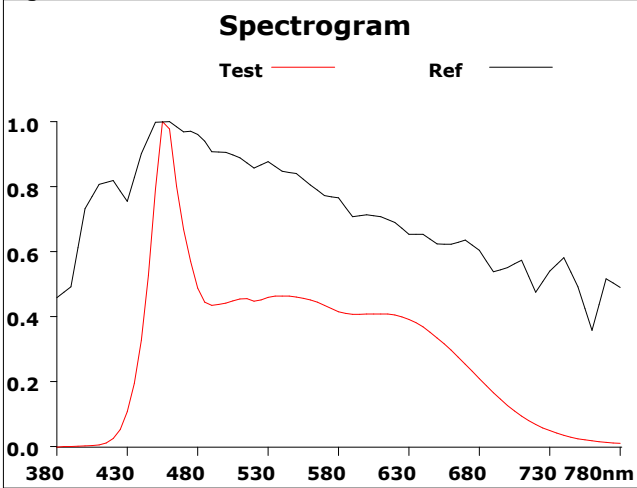


500			
Hue Bin	Rf	Chroma	Hue
1	89.4	-1.2%	2.6%
2	94.6	0.8%	1.4%
3	92.9	-0.4%	-3.7%
4	89.9	-2.9%	-4.4%
5	80.5	-10.7%	-4.6%
6	88.1	-7.5%	-0.6%
7	88.9	-6.1%	3.1%
8	81.4	-4.0%	9.3%
9	82.6	-0.9%	14.1%
10	82.3	3.1%	11.3%
11	86.4	4.8%	3.5%
12	92.0	2.3%	-4.3%
13	88.9	1.6%	-5.6%
14	79.0	8.1%	-6.6%
15	85.4	1.6%	-6.5%
16	91.9	-2.9%	2.7%

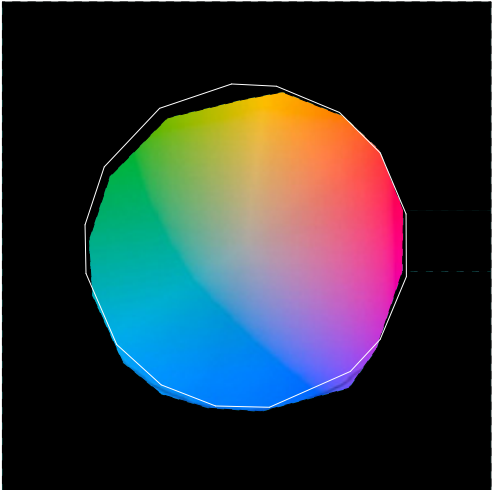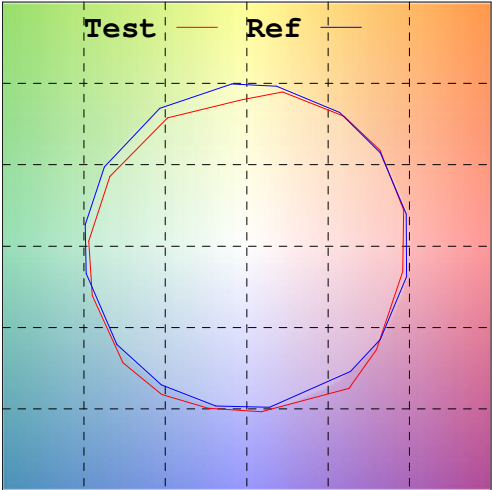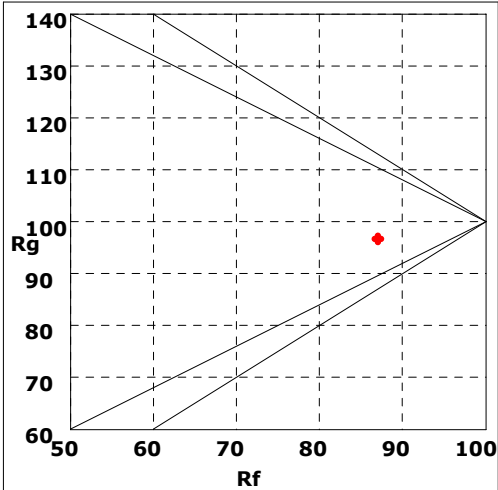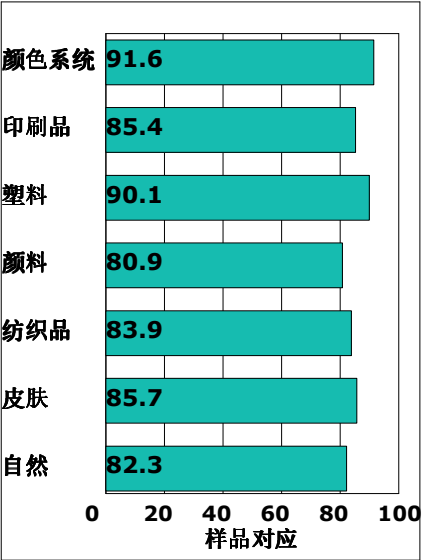

Rf by Bue



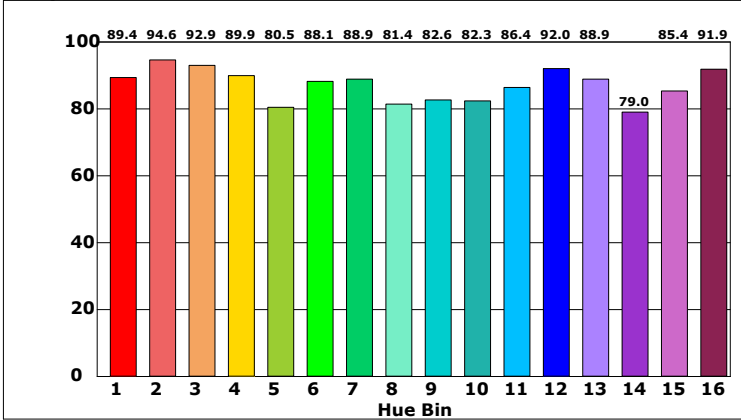


Chroma by Bue

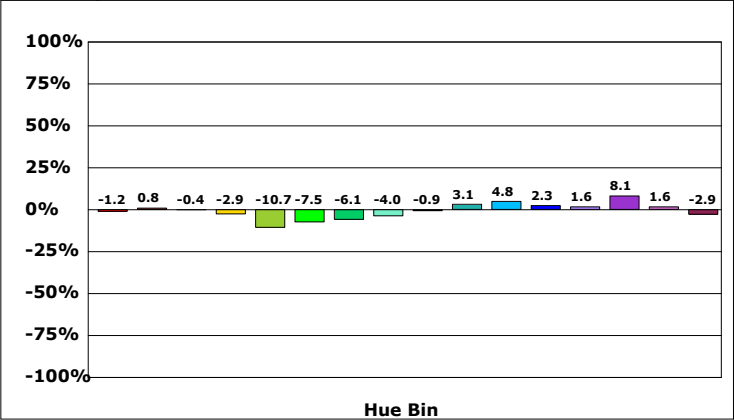

产品型号:
产品编号:
测试人员:
备注:


制造厂商:
测试单位:
测试日期:10/12/23

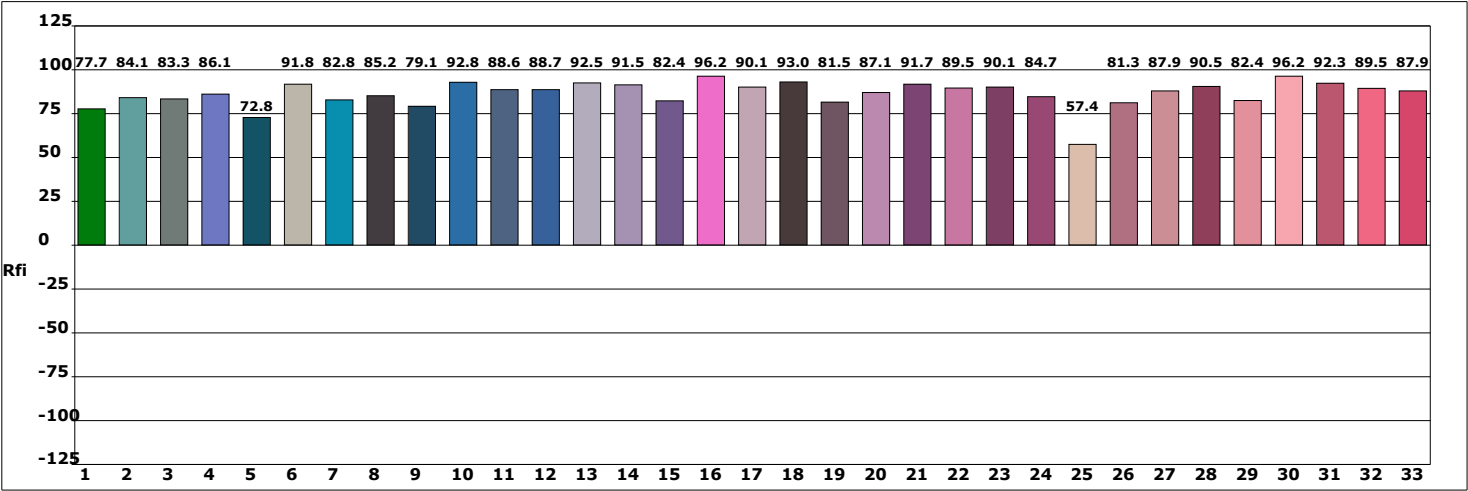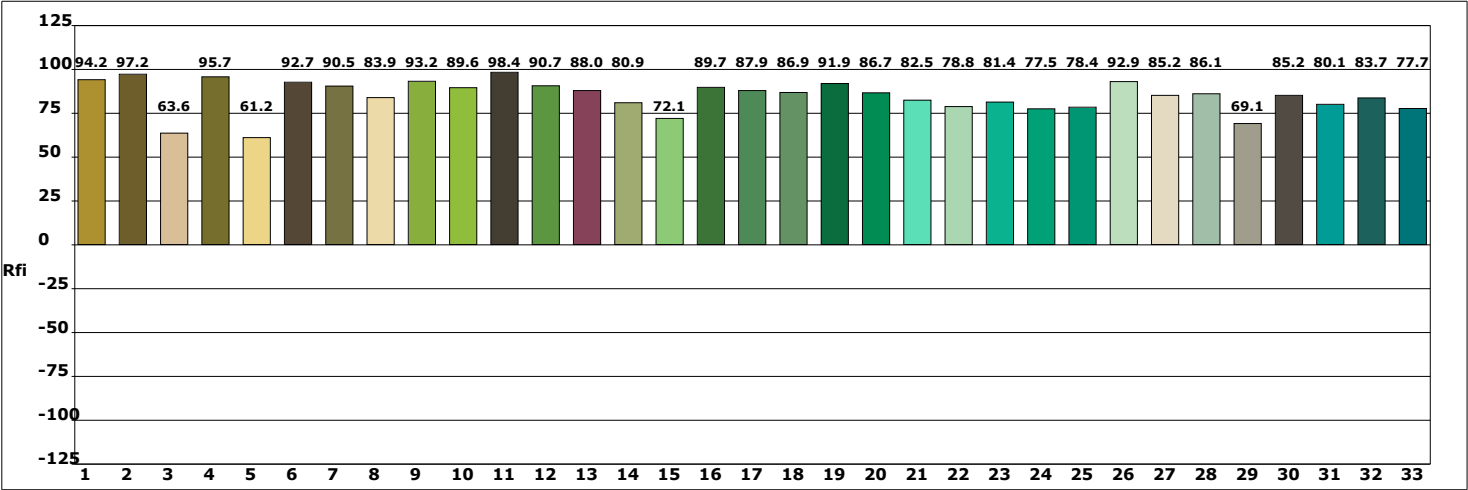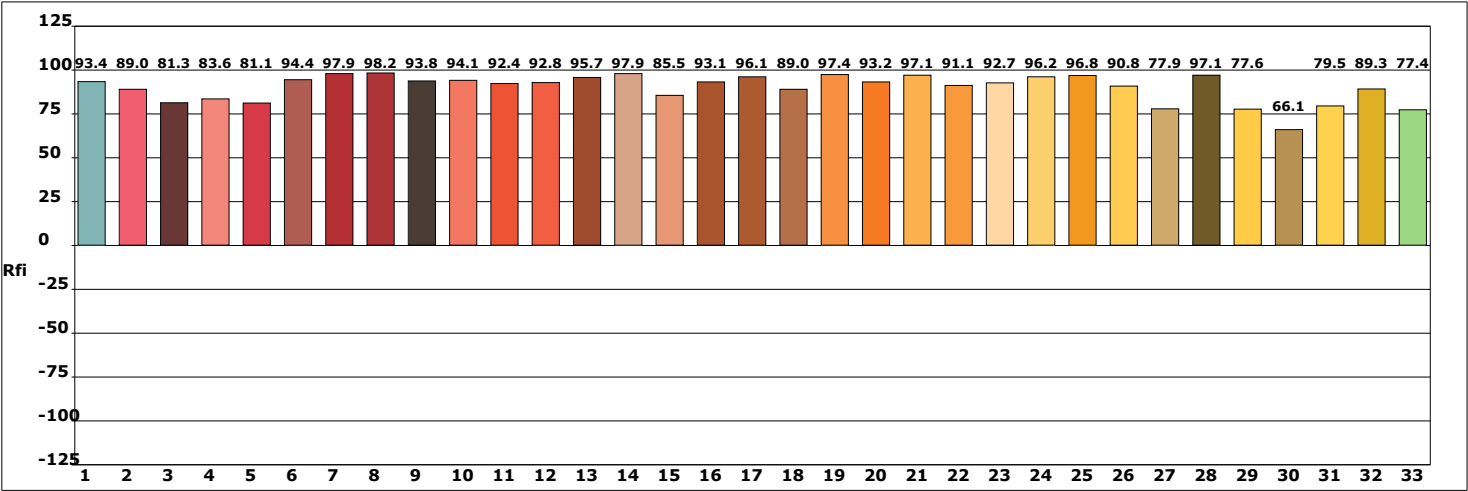


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

光谱图

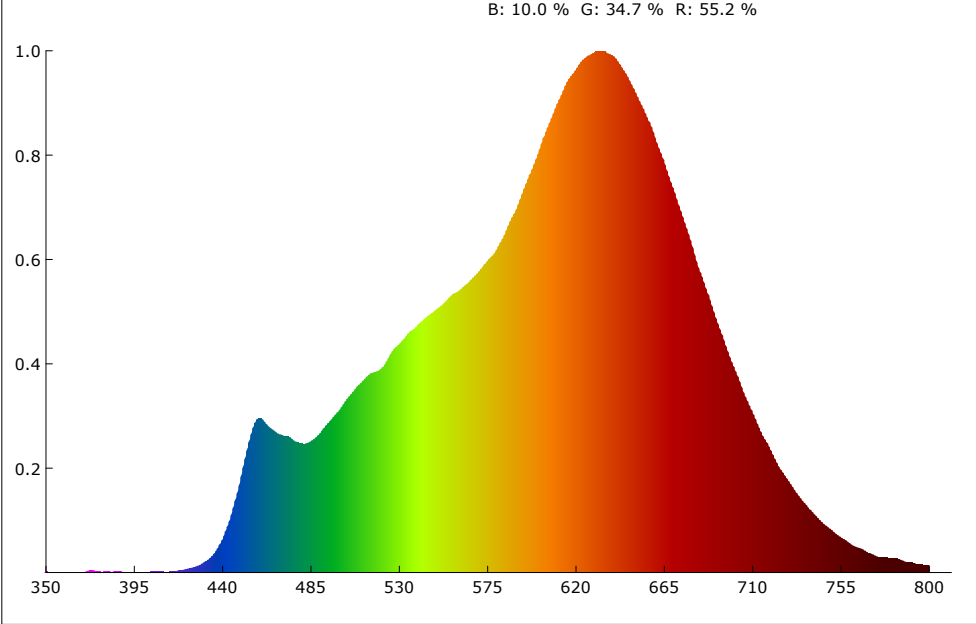

SDCM

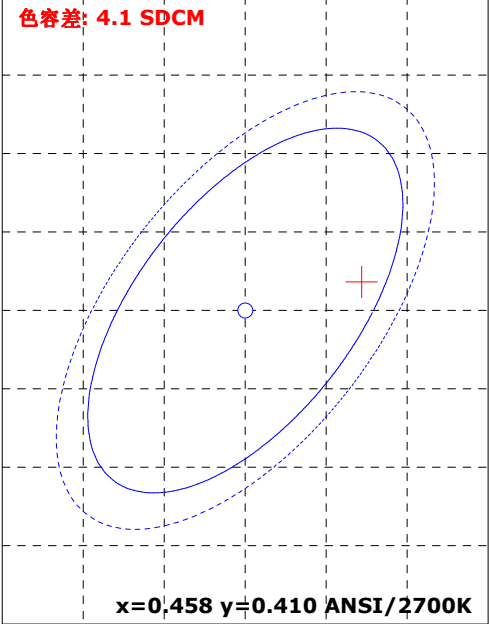

颜色参数:

坐标x: 0.4650 坐标y: 0.4119 坐标u: 0.2652 坐标v: 0.3524 坐标u': 0.2652 坐标v': 0.5286
红色比: 55.2 % 绿色比: 34.7 % 蓝色比: 10.0 % 光通量红色比: 27.2 % 光通量绿色比: 71.0 % 光通量蓝色比: 1.8 %

显色指数: 95.7 AvgR: 94.9
R1: 97.6 R2: 97.0 R3: 98.3 R4: 96.8 R5: 96.5 R6: 92.8 R7: 93.9 R8: 93.1
R9: 88.1 R10: 94.9 R11: 95.3 R12: 85.6 R13: 96.9 R14: 99.0 R15: 97.7


色温: 2640 K 光通量: 5875.290 lm 峰值波长: 633.5 nm 色容差: 4.1
明暗视觉比: 1.3 中心波长: 619.0 nm 主波长: 584.5 nm 质心波长: 606.5 nm
半宽度: 141.5 nm 色偏差: 0.00007 色纯度: 63.2 % 色质指数: 85.6
LER(TM-30): 261.5 辐射功率: 22463.6 mw 色域指数(Rg): 96.8 逼真度(Rf): 89.8
红光辐射功率: 11444.3 mw 近红辐射功率: 1675.9 mw 远红辐射功率: 62.1 mw

电参数:





光效: 19.3 Lm/W 能效: 21.0 能效等级: G
电压: 222.3 V 电流: 1.403 A 功率: 304.400 W 功率因素: 0.976

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 89.8 CCT: 2640K u': 0.2652
Rg: 96.8 LER: 261.5 Duv: 0.00007 v': 0.5286

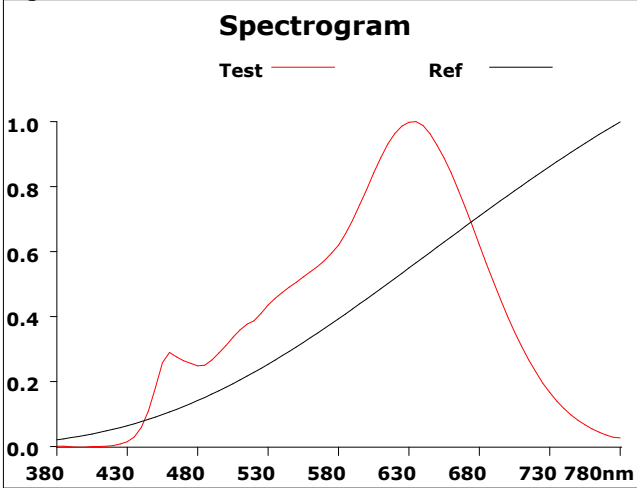


500			
Hue Bin	Rf	Chroma	Hue
1	91.8	-1.5%	2.4%
2	96.0	0.0%	-0.7%
3	93.6	-0.9%	-2.6%
4	84.9	-7.2%	-6.1%
5	91.1	-6.7%	-1.2%
6	91.2	-4.4%	3.3%
7	86.8	-5.0%	5.7%
8	90.5	-0.3%	5.8%
9	86.6	1.3%	7.1%
10	88.5	3.8%	6.1%
11	91.2	5.4%	2.5%
12	88.1	3.8%	-5.5%
13	88.5	-1.5%	-8.0%
14	90.1	-0.5%	-6.6%
15	88.4	-5.0%	1.9%
16	88.6	-1.6%	-6.2%

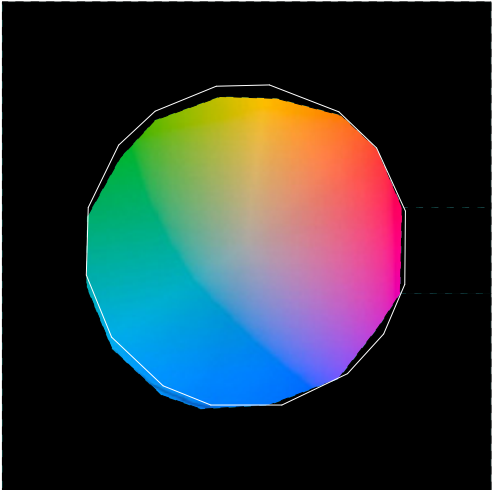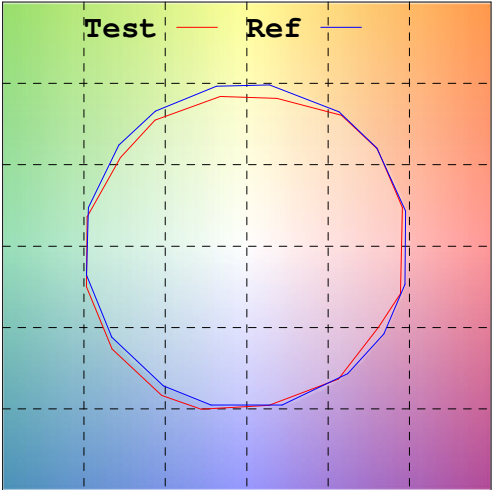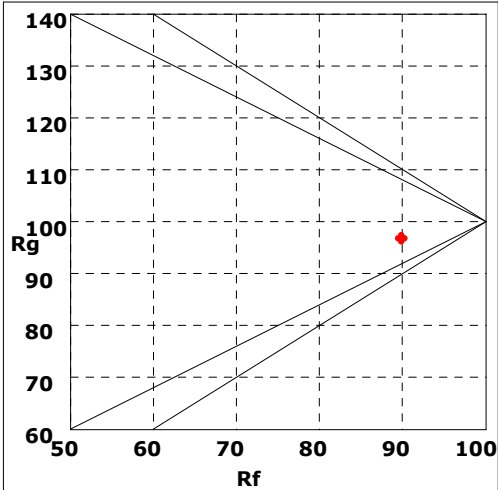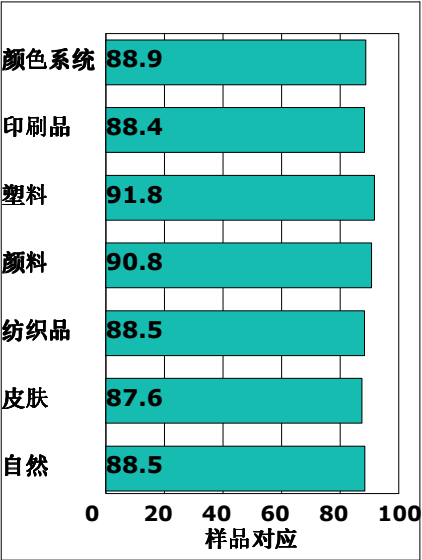




Rf by Bue

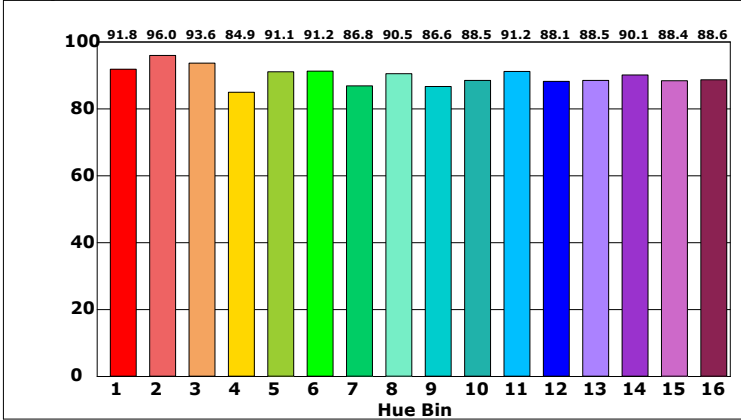

Chroma by Bue

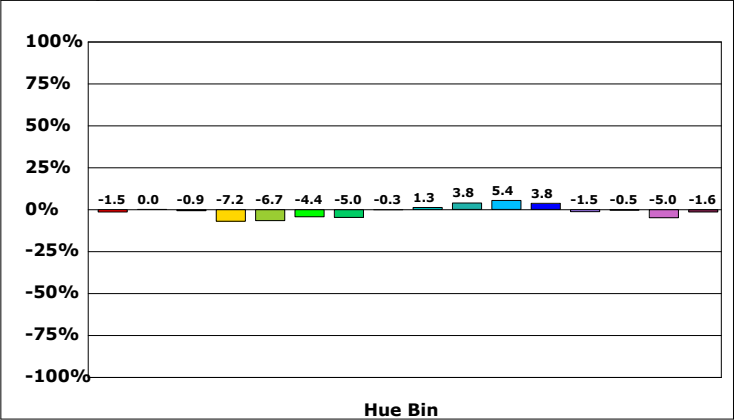


产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:

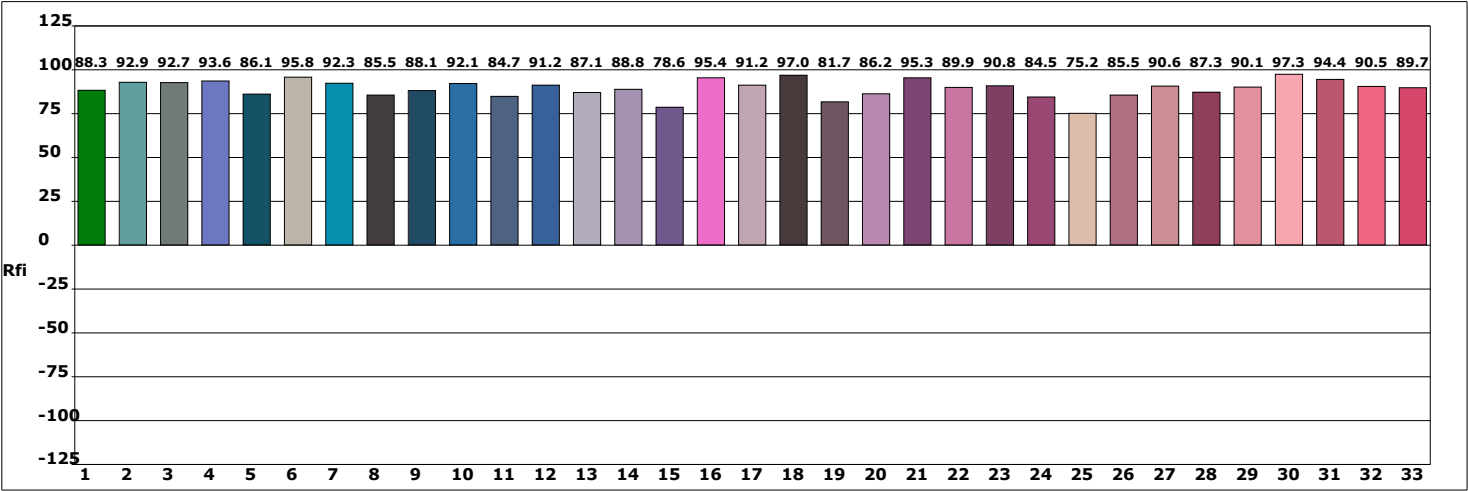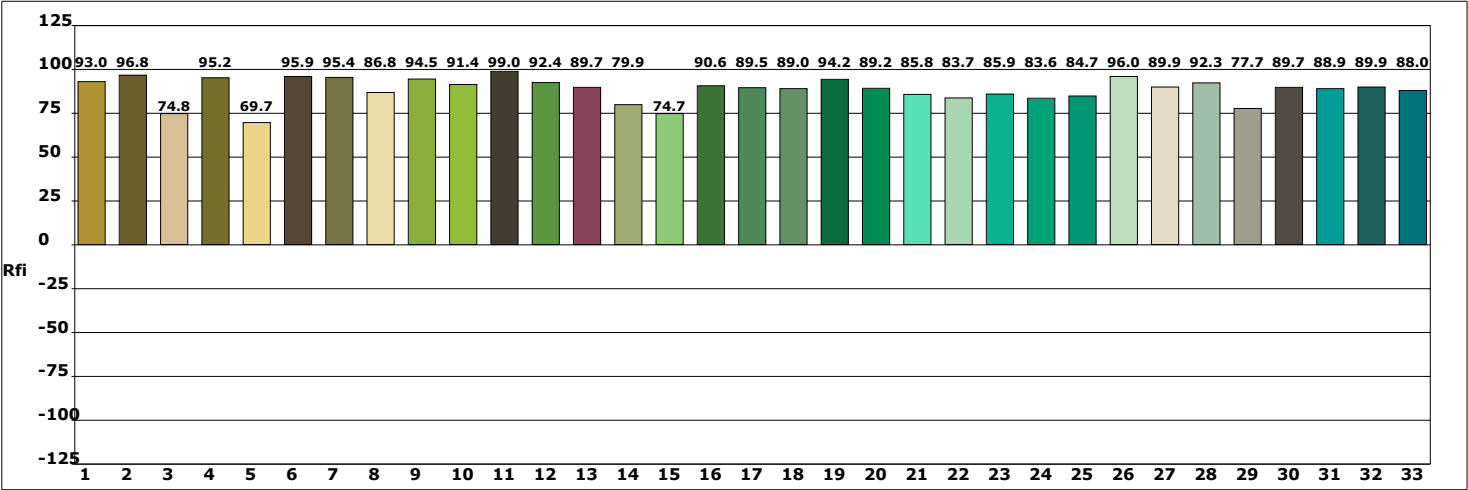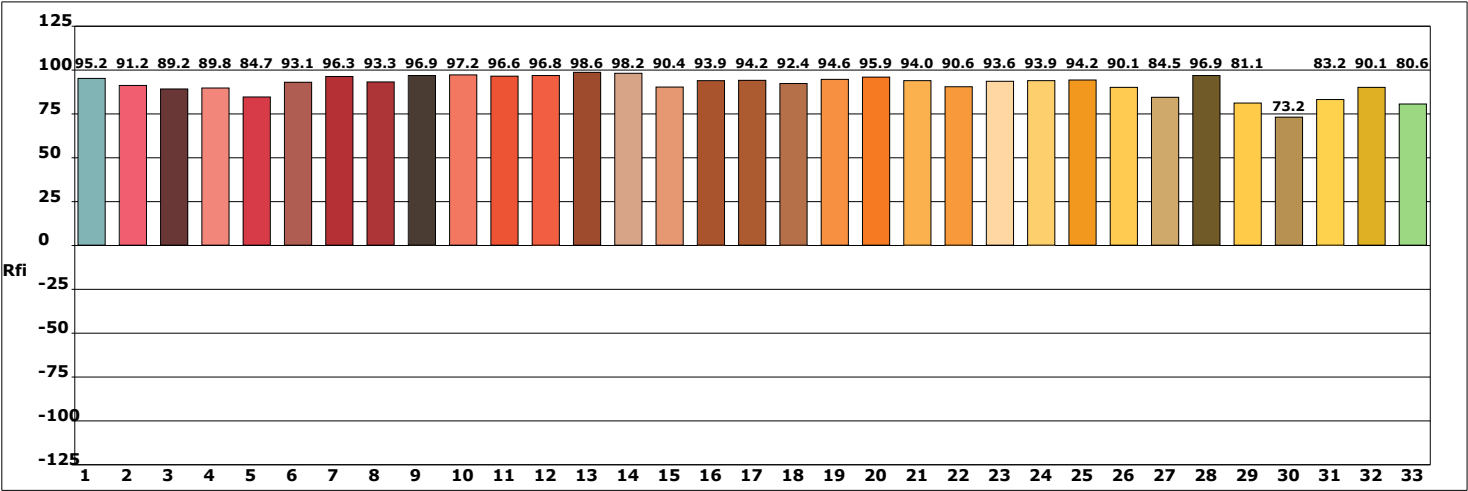


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

光谱图

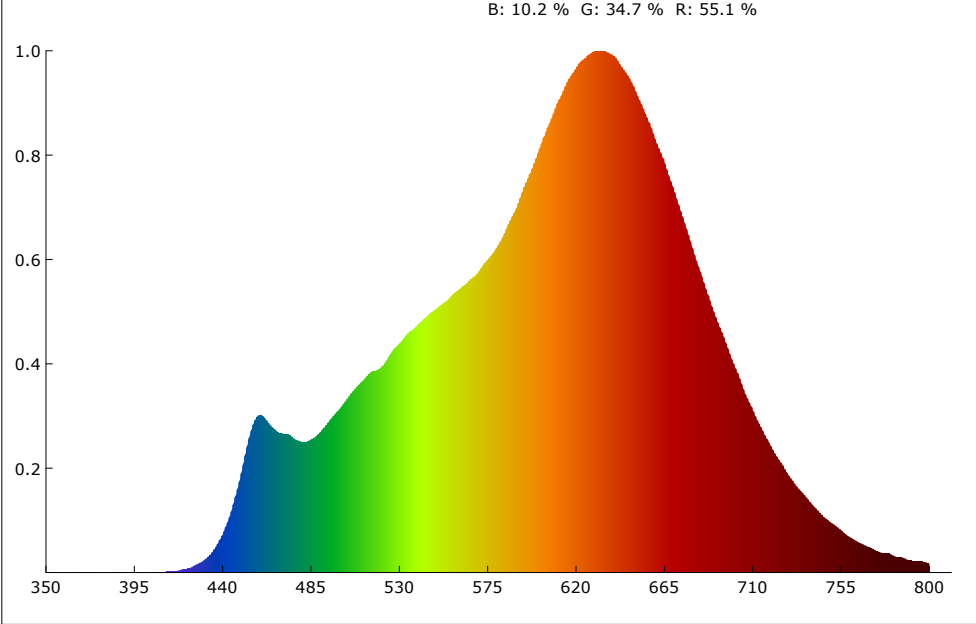

SDCM

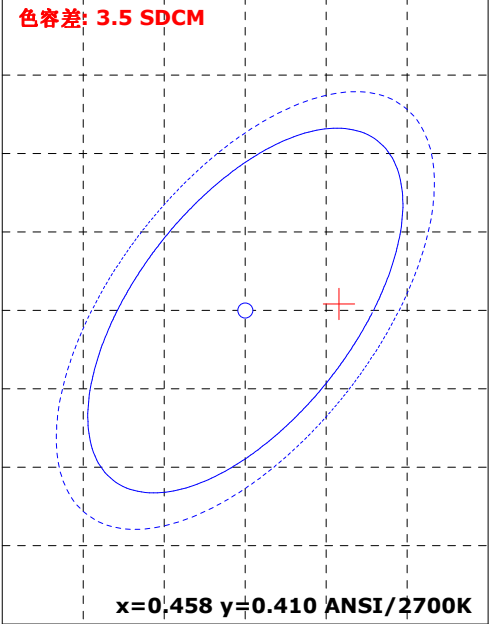

颜色参数:

坐标x: 0.4636 坐标y: 0.4105 坐标u: 0.2650 坐标v: 0.3519 坐标u': 0.2650 坐标v': 0.5279
红色比: 55.1 % 绿色比: 34.7 % 蓝色比: 10.2 % 光通量红色比: 27.2 % 光通量绿色比: 71.0 % 光通量蓝色比: 1.9 %

显色指数: 95.6 AvgR: 94.9
R1: 97.6 R2: 96.9 R3: 98.2 R4: 97.0 R5: 96.4 R6: 92.4 R7: 93.9 R8: 93.1
R9: 88.4 R10: 94.7 R11: 95.3 R12: 85.6 R13: 96.9 R14: 99.1 R15: 97.9


色温: 2646 K 光通量: 8344.022 lm 峰值波长: 630.5 nm 色容差: 3.5
明暗视觉比: 1.3 中心波长: 619.0 nm 主波长: 584.6 nm 质心波长: 607.1 nm
半宽度: 141.7 nm 色偏差: -0.00036 色纯度: 62.4 % 色质指数: 86.1
LER(TM-30): 259.7 辐射功率: 32123.6 mw 色域指数(Rg): 97.3 逼真度(Rf): 90.3
红光辐射功率: 16234.7 mw 近红辐射功率: 2547.7 mw 远红辐射功率: 108.8 mw

电参数:





光效: 27.5 Lm/W 能效: 29.9 能效等级: G
电压: 221.9 V 电流: 1.402 A 功率: 303.900 W 功率因素: 0.976

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 90.3 CCT: 2646K u': 0.2650
Rg: 97.3 LER: 259.7 Duv: -0.00036 v': 0.5279

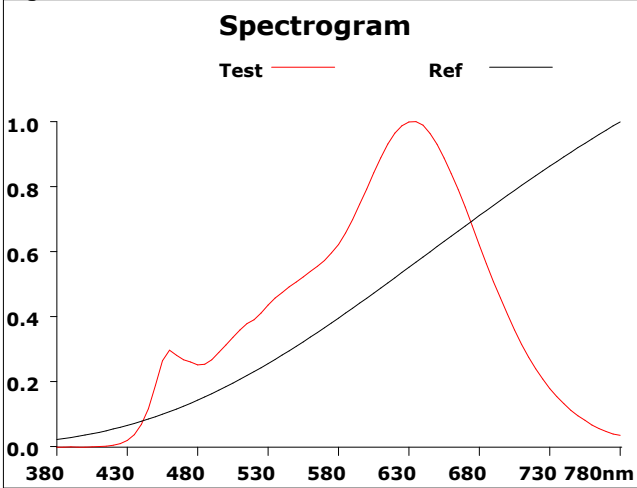


500			
Hue Bin	Rf	Chroma	Hue
1	92.1	-1.5%	2.3%
2	96.1	0.1%	-0.5%
3	94.3	-0.7%	-2.3%
4	85.9	-6.6%	-5.7%
5	91.8	-6.1%	-1.1%
6	92.1	-3.9%	3.0%
7	88.0	-4.5%	5.2%
8	91.4	-0.1%	5.2%
9	87.4	1.3%	6.7%
10	89.0	3.7%	5.8%
11	91.4	5.3%	2.4%
12	88.3	3.9%	-5.3%
13	88.7	-1.2%	-8.0%
14	90.1	-0.3%	-6.7%
15	88.9	-4.7%	1.6%
16	88.8	-1.5%	-6.3%

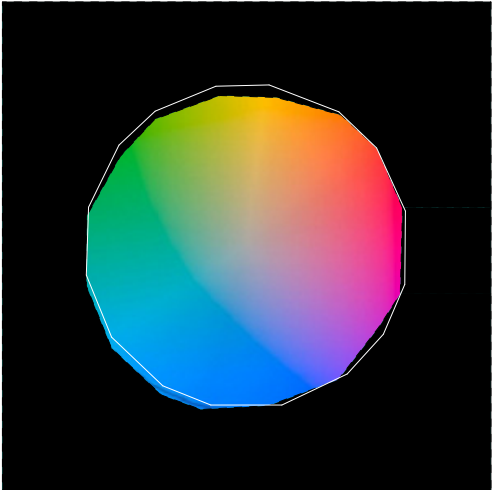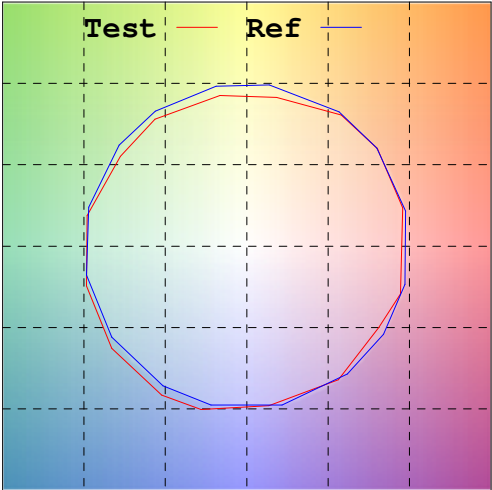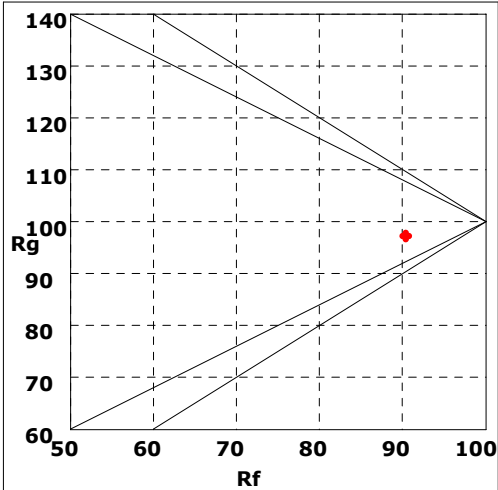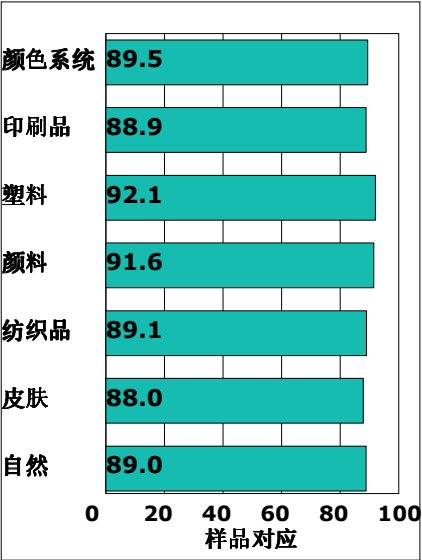

Rf by Bue



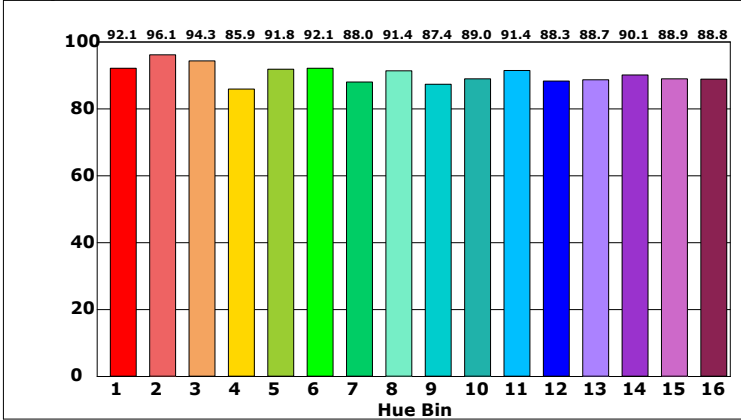


Chroma by Bue

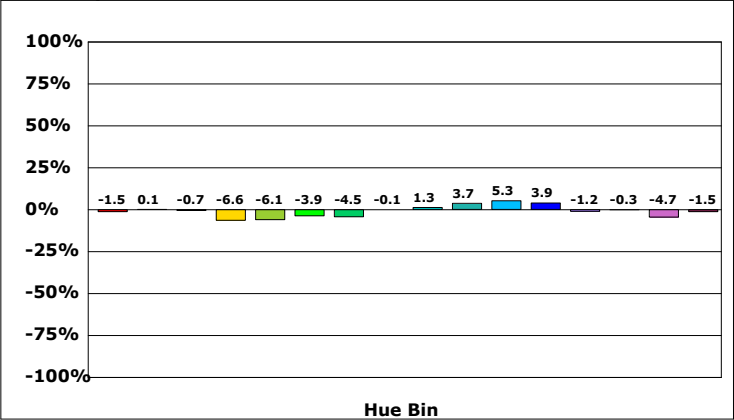

产品型号:
产品编号:
测试人员:
备注:


制造厂商:
测试单位:
测试日期:10/12/23

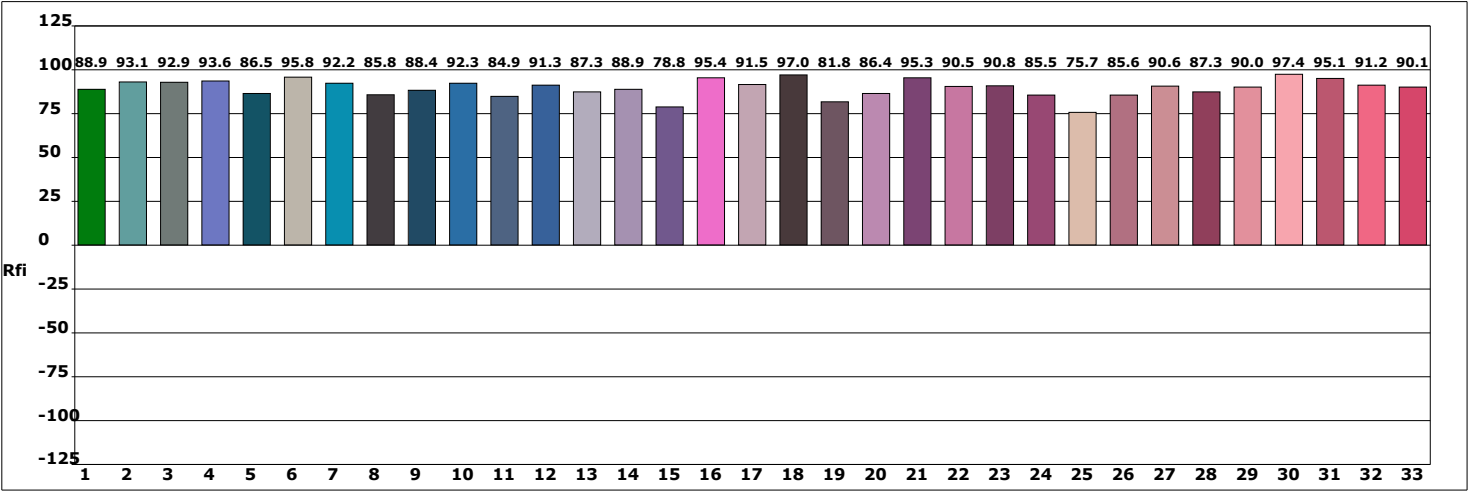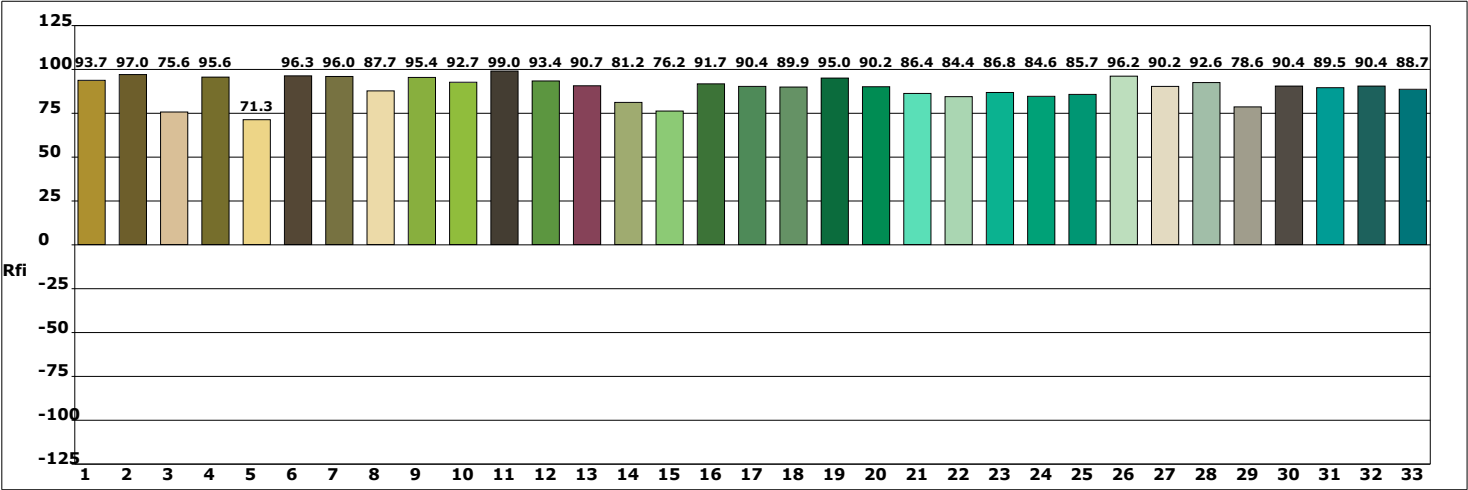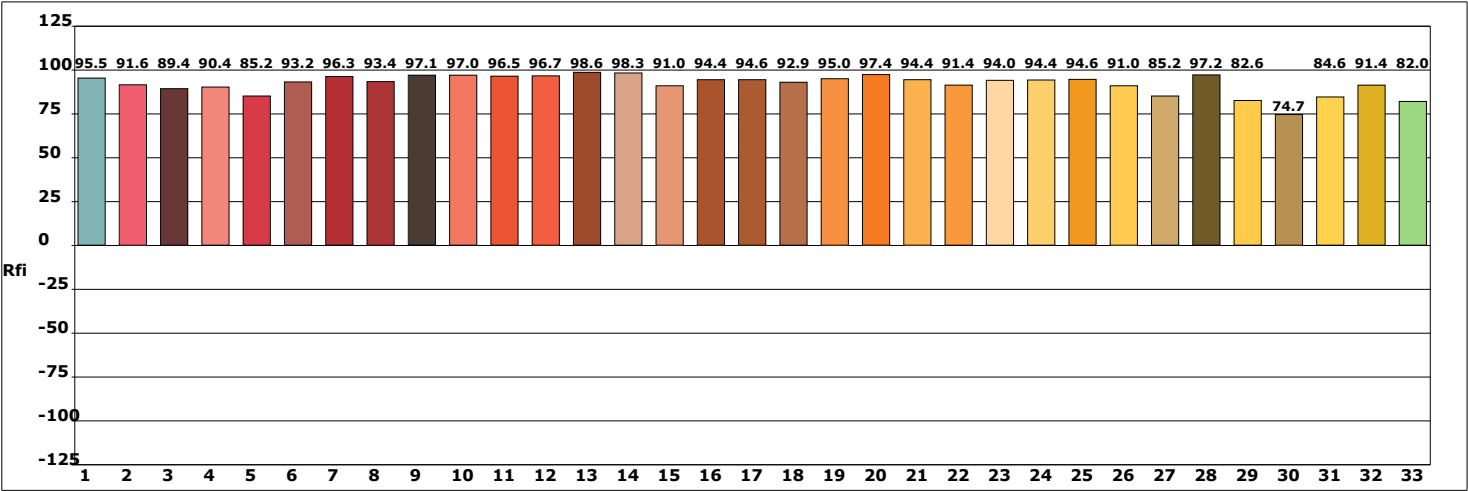


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

光谱图

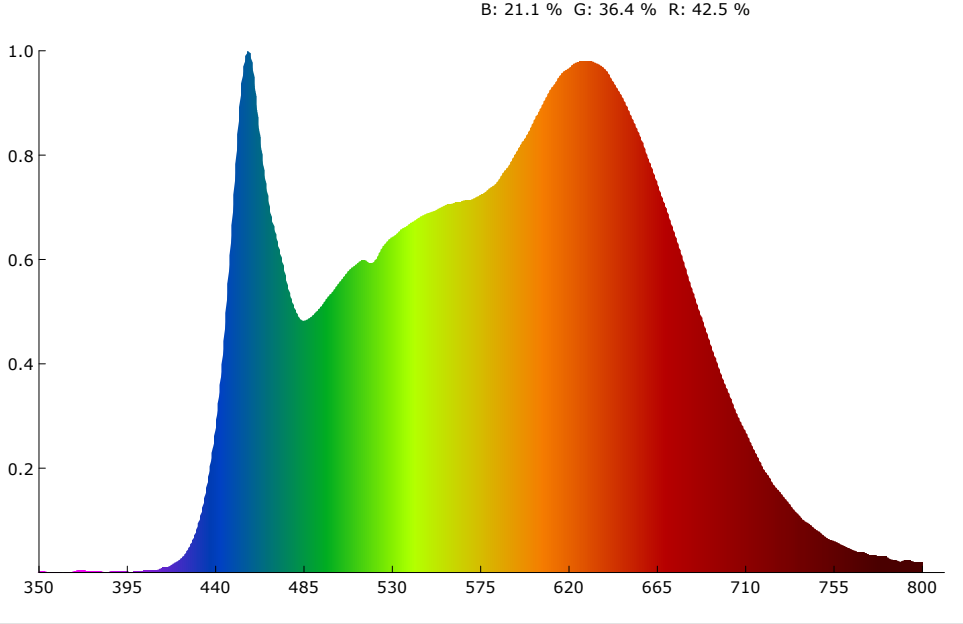

SDCM

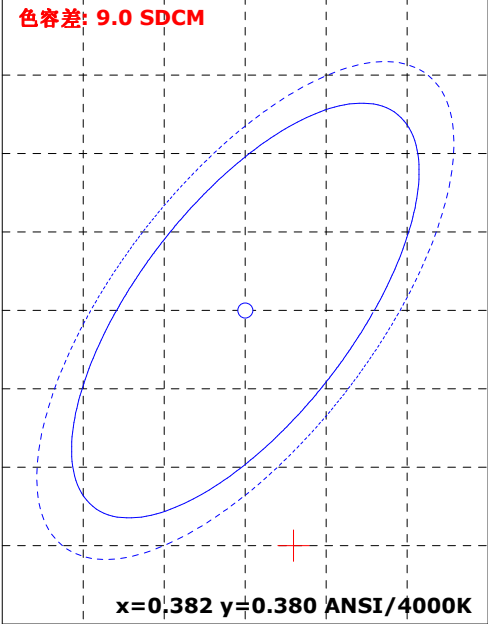

颜色参数:

坐标x: 0.3848 坐标y: 0.3647 坐标u: 0.2330 坐标v: 0.3312 坐标u': 0.2330 坐标v': 0.4968
红色比: 42.5 % 绿色比: 36.4 % 蓝色比: 21.1 % 光通量红色比: 21.8 % 光通量绿色比: 74.6 % 光通量蓝色比: 3.6 %

显色指数: 93.2 AvgR: 91.5
R1: 92.0 R2: 92.5 R3: 96.5 R4: 95.7 R5: 92.1 R6: 89.2 R7: 93.8 R8: 94.5
R9: 86.4 R10: 86.3 R11: 95.0 R12: 76.8 R13: 91.4 R14: 98.9 R15: 91.2


色温: 3782 K 光通量: 7213.998 lm 峰值波长: 457.4 nm 色容差: 9.0
明暗视觉比: 1.9 中心波长: 463.6 nm 主波长: 584.2 nm 质心波长: 581.6 nm
半宽度: 35.1 nm 色偏差: -0.00700 色纯度: 24.9 % 色质指数: 88.5
LER(TM-30): 265.4 辐射功率: 27183.9 mw 色域指数(Rg): 99.8 逼真度(Rf): 89.8
红光辐射功率: 10908.0 mw 近红辐射功率: 1439.2 mw 远红辐射功率: 69.9 mw

电参数:





光效: 24.1 Lm/W 能效: 26.2 能效等级: G
电压: 221.7 V 电流: 1.382 A 功率: 299.300 W 功率因素: 0.976

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 89.8 CCT: 3782K u': 0.2330
Rg: 99.8 LER: 265.4 Duv: -0.00700 v': 0.4968

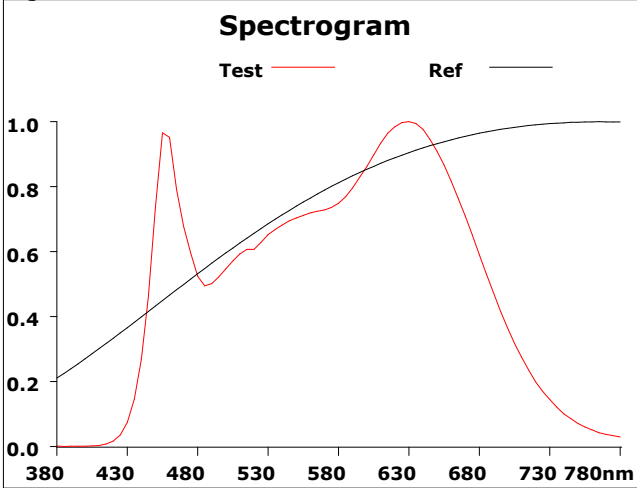


500			
Hue Bin	Rf	Chroma	Hue
1	91.9	0.7%	2.1%
2	93.4	2.0%	-0.4%
3	93.6	0.9%	-2.2%
4	89.0	-3.5%	-4.7%
5	88.0	-7.4%	-2.8%
6	93.7	-3.4%	1.1%
7	90.2	-3.7%	4.8%
8	87.5	-0.4%	7.0%
9	85.0	2.1%	9.9%
10	87.4	3.4%	6.3%
11	87.7	6.2%	4.3%
12	90.0	4.1%	-2.3%
13	91.8	-0.3%	-5.4%
14	91.3	2.7%	-4.1%
15	88.9	-0.4%	-0.9%
16	88.1	1.3%	-2.6%

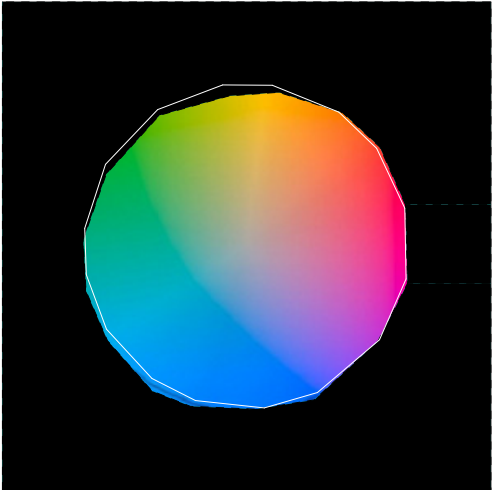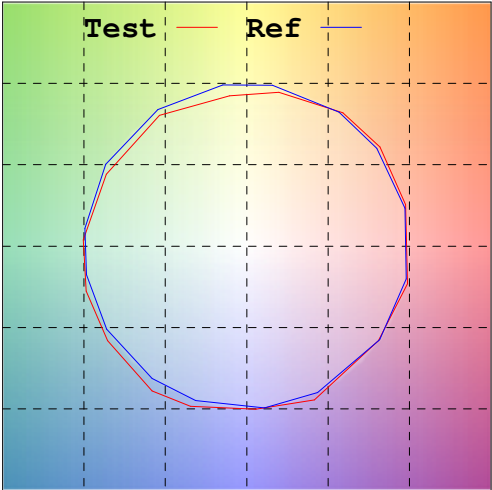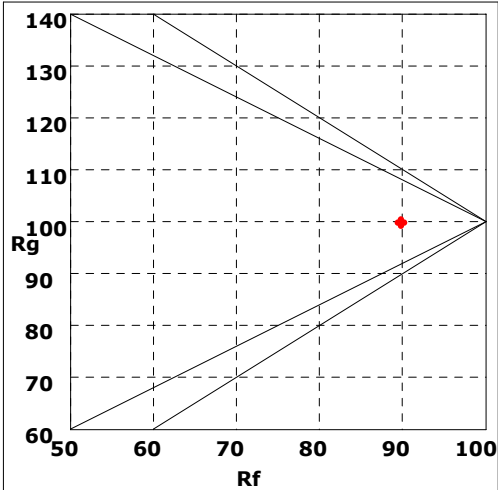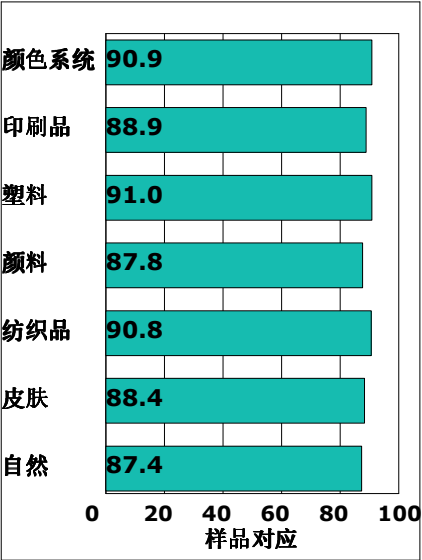




Rf by Bue

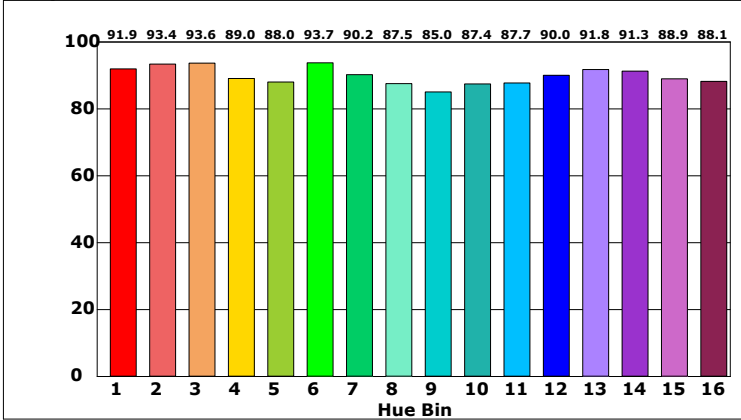

Chroma by Bue

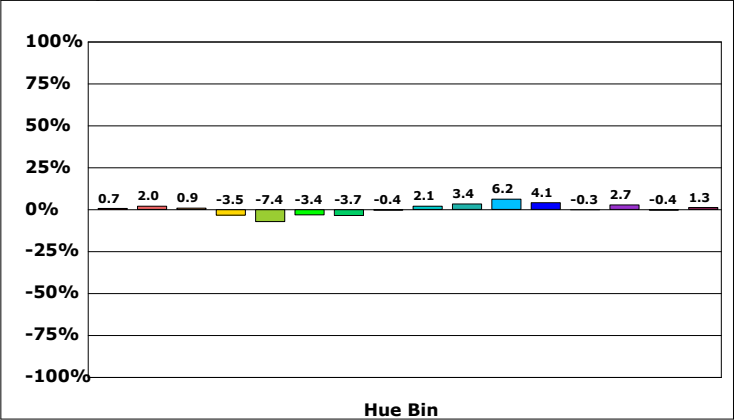


产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:

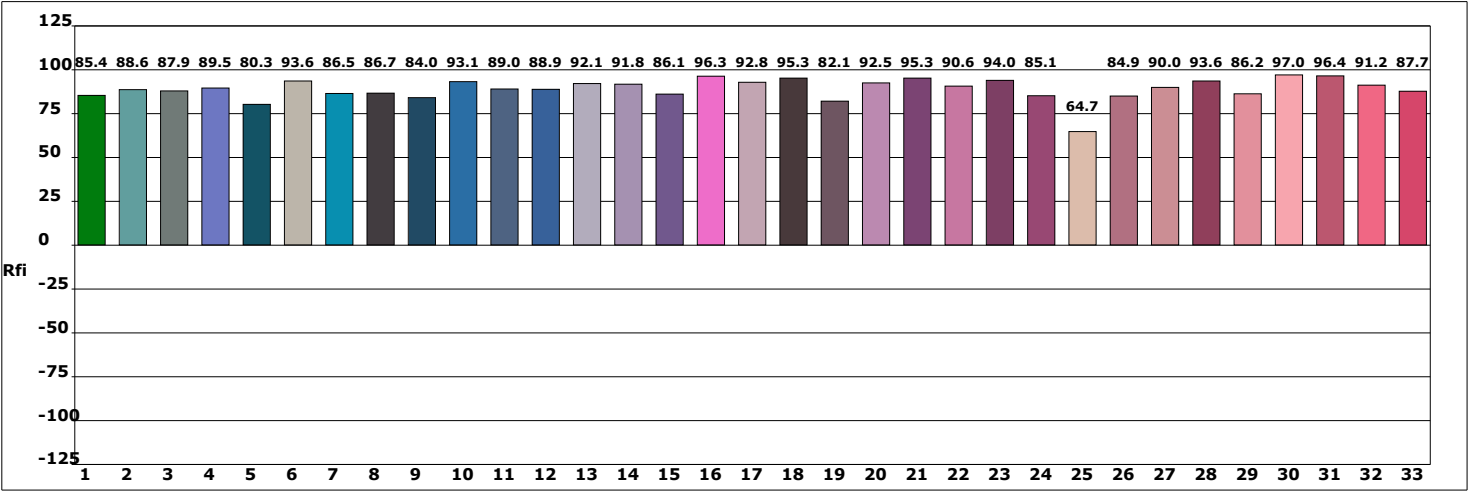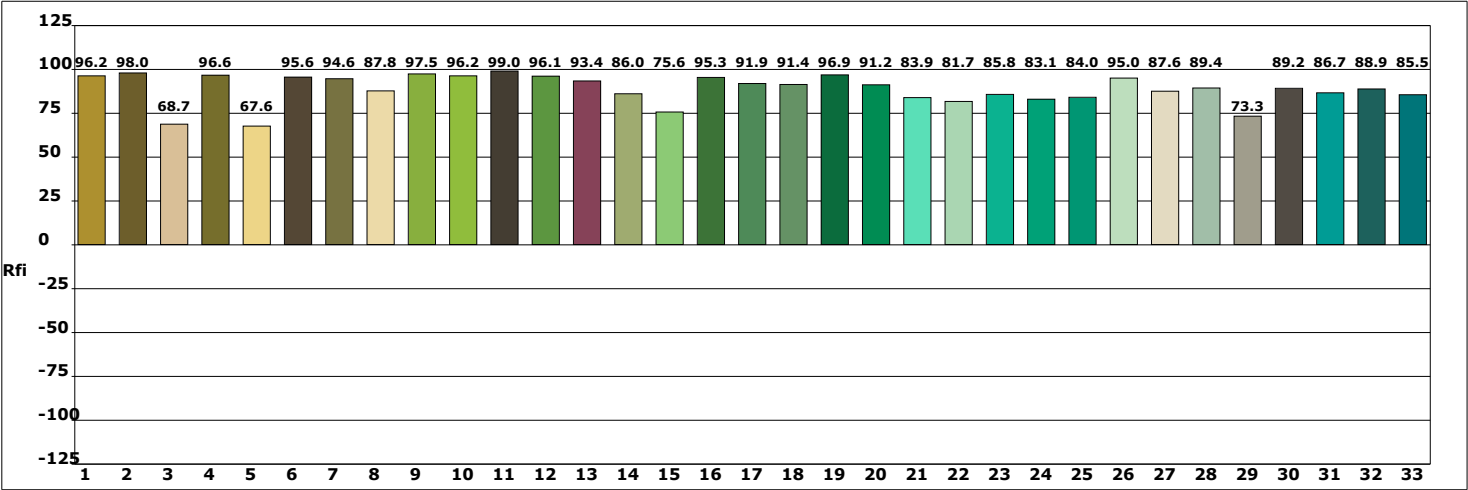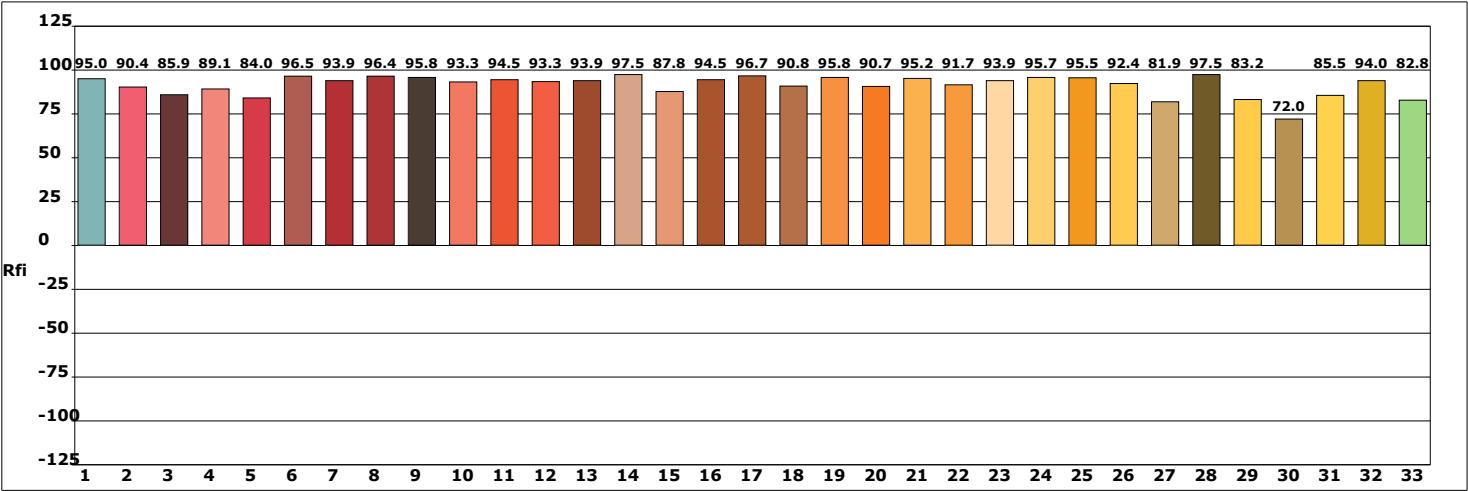


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

光谱图

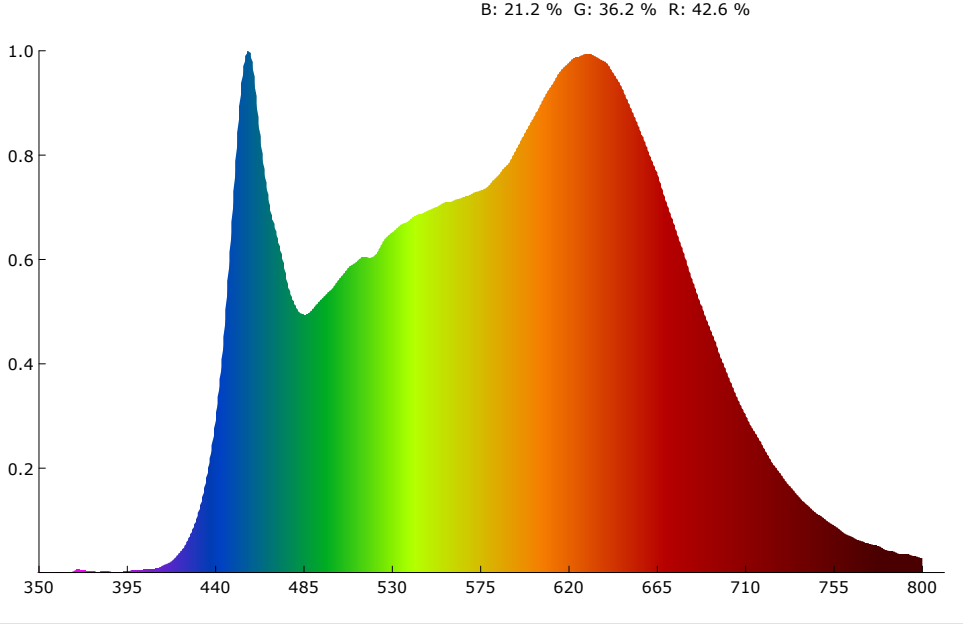

SDCM

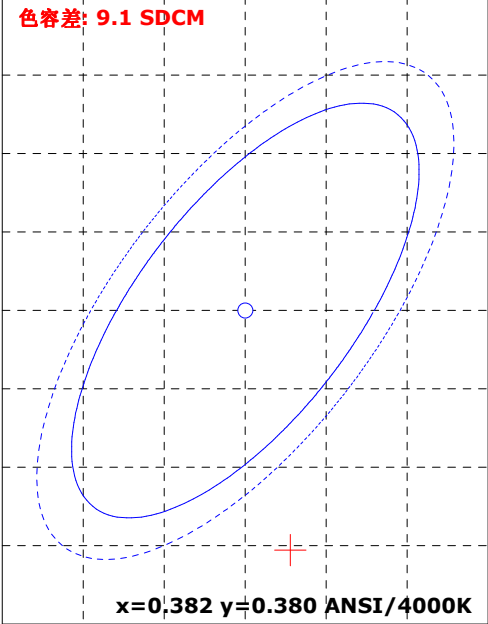

颜色参数:

坐标x: 0.3846 坐标y: 0.3644 坐标u: 0.2330 坐标v: 0.3311 坐标u': 0.2330 坐标v': 0.4966
红色比: 42.6 % 绿色比: 36.2 % 蓝色比: 21.2 % 光通量红色比: 21.8 % 光通量绿色比: 74.6 % 光通量蓝色比: 3.6 %

显色指数: 93.3 AvgR: 91.4
R1: 92.1 R2: 92.6 R3: 96.7 R4: 95.4 R5: 91.7 R6: 88.9 R7: 94.5 R8: 95.0
R9: 85.6 R10: 86.3 R11: 94.7 R12: 77.0 R13: 91.4 R14: 98.8 R15: 91.0


色温: 3784 K 光通量: 10366.945 lm 峰值波长: 457.4 nm 色容差: 9.1
明暗视觉比: 1.9 中心波长: 464.0 nm 主波长: 584.3 nm 质心波长: 583.6 nm
半宽度: 36.2 nm 色偏差: -0.00709 色纯度: 24.8 % 色质指数: 88.7
LER(TM-30): 260.4 辐射功率: 39804.0 mw 色域指数(Rg): 100.1 逼真度(Rf): 90.2
红光辐射功率: 15813.3 mw 近红辐射功率: 2525.3 mw 远红辐射功率: 151.6 mw

电参数:







光效: 34.6 Lm/W 能效: 37.7 能效等级: G
电压: 222.3 V 电流: 1.379 A 功率: 299.300 W 功率因素: 0.976

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:

Rf: 90.2 CCT: 3784K u': 0.2330
Rg: 100.1 LER: 260.4 Duv: -0.00709 v': 0.4966



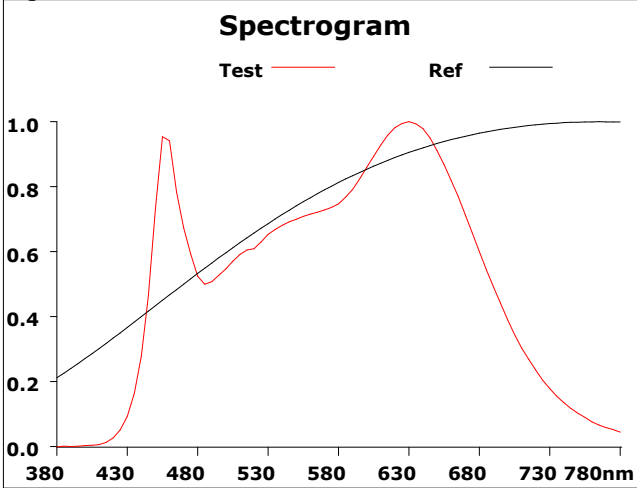


500			
Hue Bin	Rf	Chroma	Hue
1	92.1	0.8%	2.0%
2	93.5	2.0%	-0.5%
3	93.6	1.0%	-2.2%
4	89.4	-3.2%	-4.6%
5	88.5	-7.0%	-2.7%
6	94.1	-3.1%	1.1%
7	90.8	-3.3%	4.6%
8	88.1	-0.2%	6.7%
9	85.7	2.2%	9.4%
10	88.1	3.4%	5.9%
11	88.2	6.1%	4.0%
12	90.3	4.0%	-2.2%
13	92.1	-0.2%	-5.2%
14	91.7	2.7%	-3.8%
15	89.4	-0.3%	-0.8%
16	88.6	1.5%	-2.5%

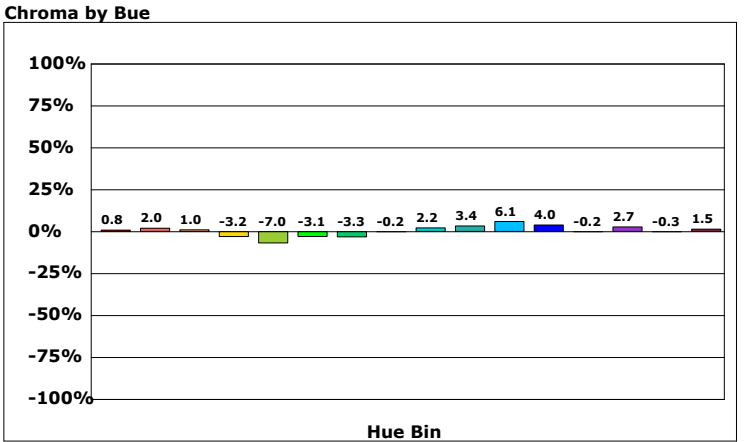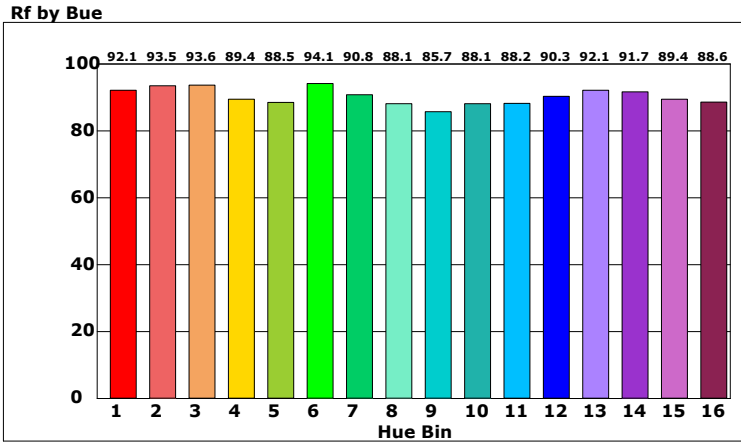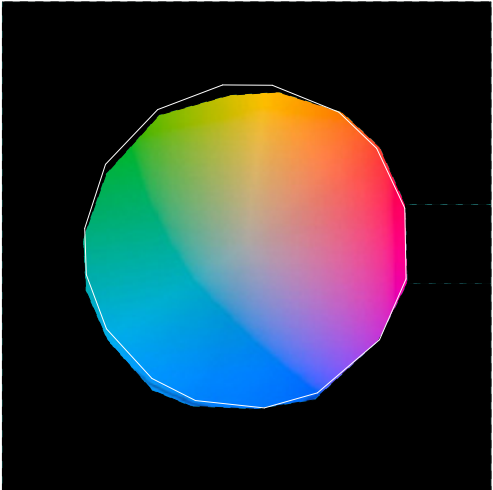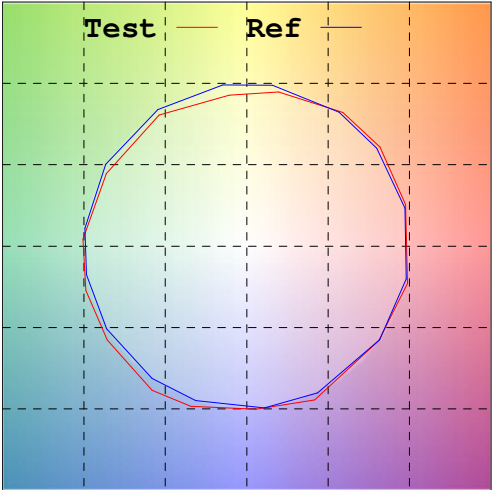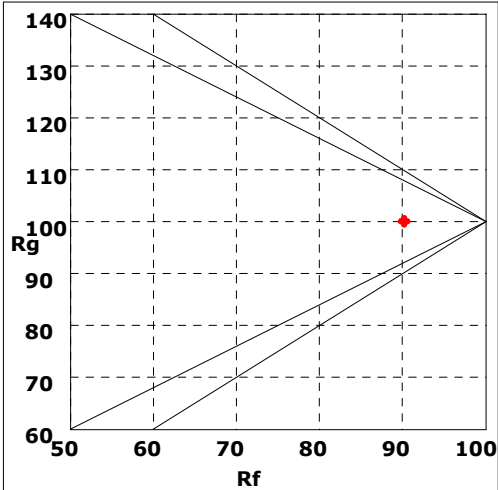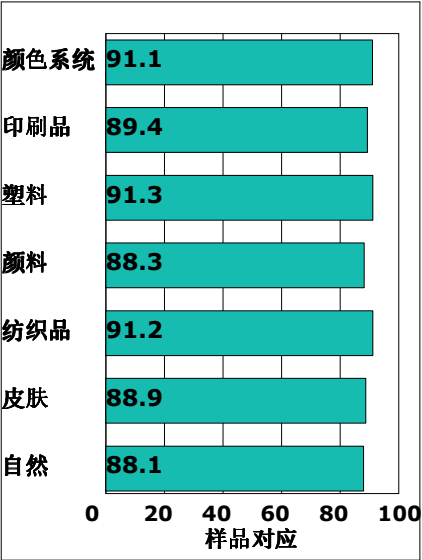

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

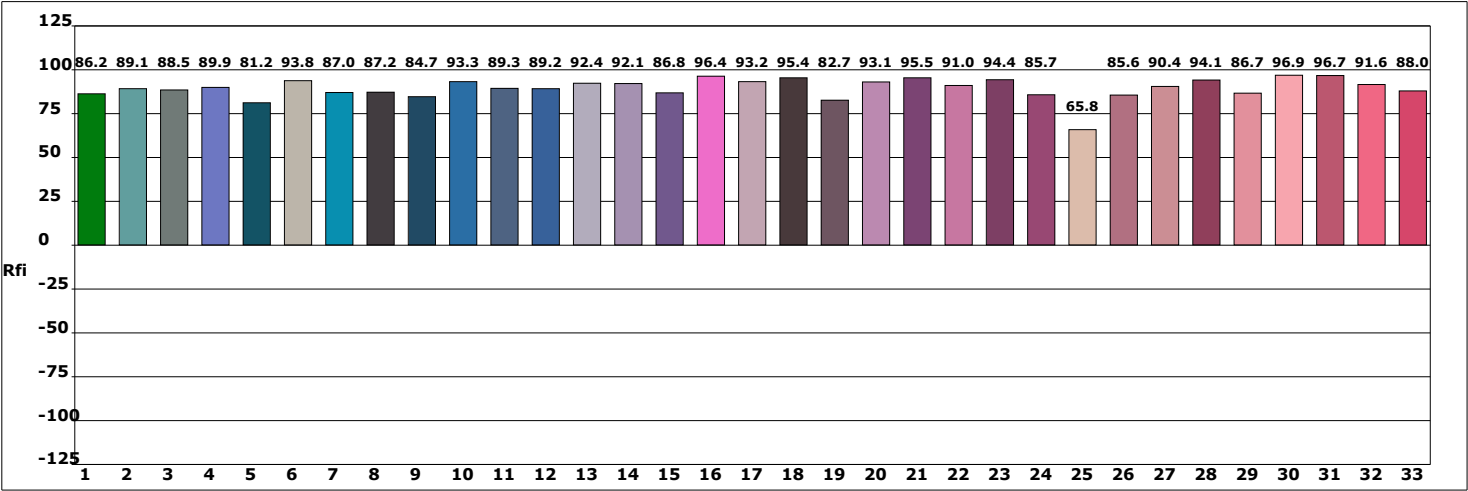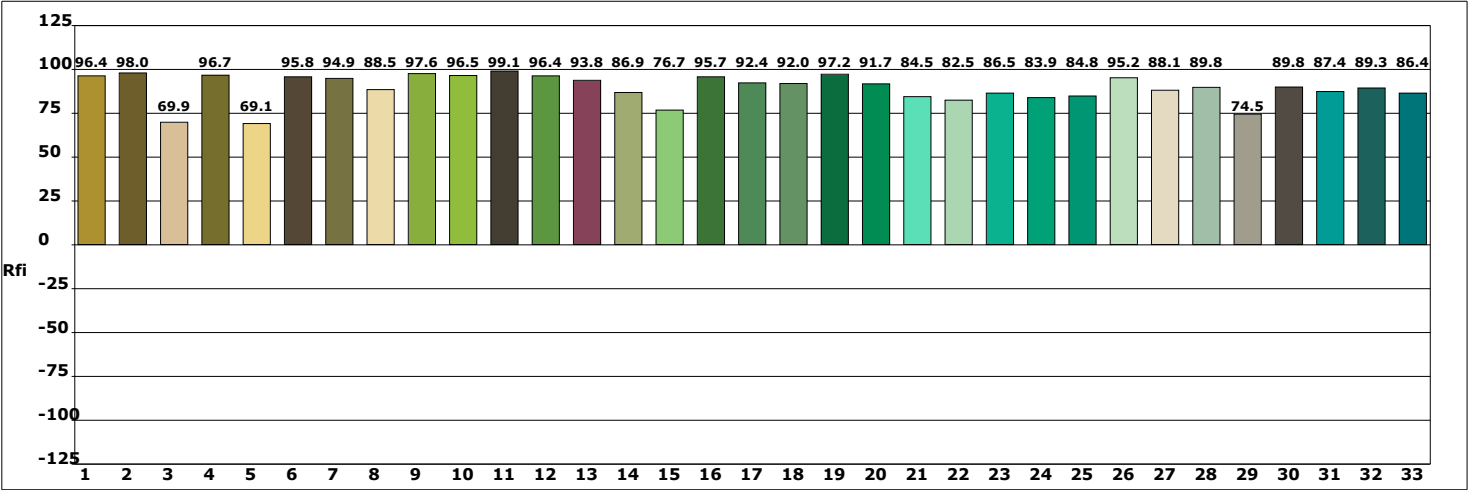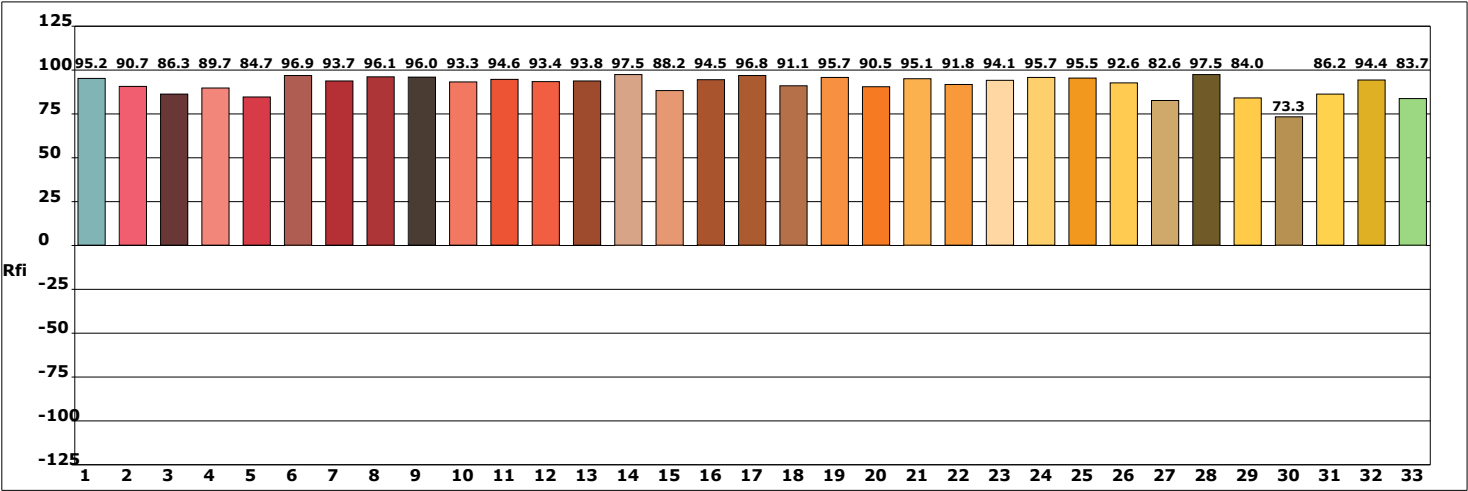

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23