



光谱图

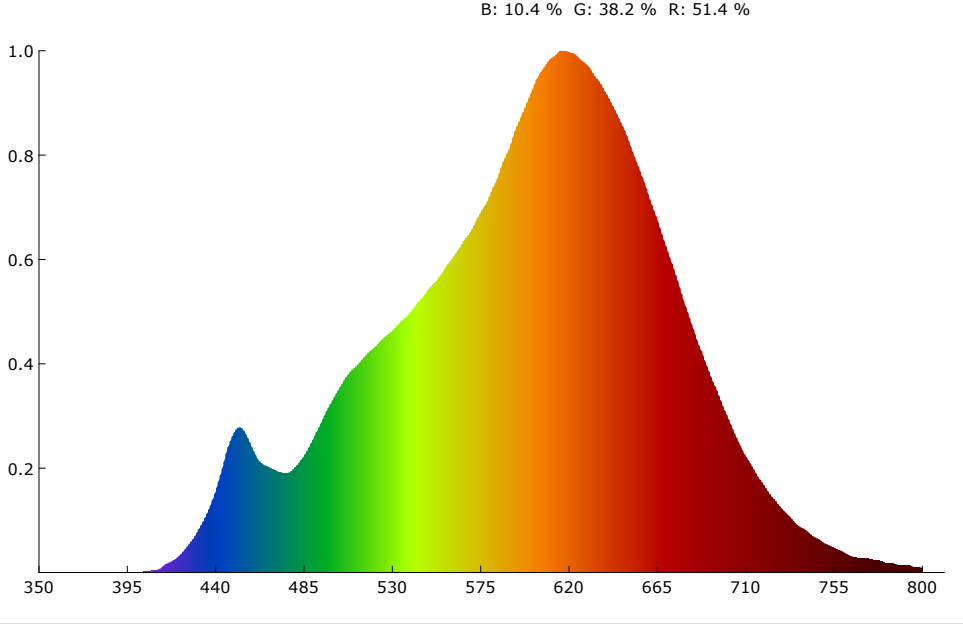

SDCM

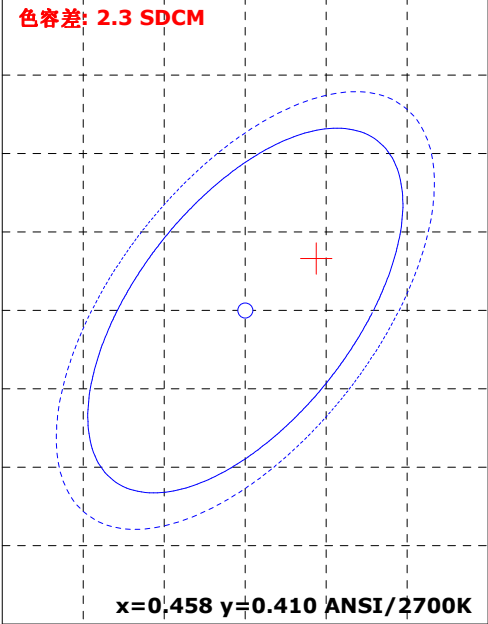

颜色参数:

坐标x: 0.4622 坐标y: 0.4134 坐标u: 0.2627 坐标v: 0.3525 坐标u': 0.2627 坐标v': 0.5288
红色比: 51.4 % 绿色比: 38.2 % 蓝色比: 10.4 % 光通量红色比: 25.8 % 光通量绿色比: 72.7 % 光通量蓝色比: 1.5 %

显色指数: 93.2 AvgR: 91.0
R1: 93.5 R2: 97.5 R3: 98.7 R4: 94.1 R5: 94.0 R6: 98.0 R7: 90.7 R8: 79.4
R9: 55.5 R10: 94.0 R11: 96.5 R12: 90.6 R13: 94.7 R14: 99.6 R15: 87.9


色温: 2690 K 光通量: 1146.232 lm 峰值波长: 618.6 nm 色容差: 2.3
明暗视觉比: 1.3 中心波长: 610.4 nm 主波长: 584.0 nm 质心波长: 598.9 nm
半宽度: 138.7 nm 色偏差: 0.00084 色纯度: 62.8 % 色质指数: 88.4
LER(TM-30): 287.3 辐射功率: 3990.1 mw 色域指数(Rg): 97.9 逼真度(Rf): 92.5
红光辐射功率: 1935.1 mw 近红辐射功率: 218.2 mw 远红辐射功率: 8.0 mw

电参数:





光效: 37.8 Lm/W 能效: 41.2 能效等级: G
电压: 222.6 V 电流: 0.240 A 功率: 30.290 W 功率因素: 0.565

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:09/11/23
备注:


Rf: 92.5 CCT: 2690K u': 0.2627
Rg: 97.9 LER: 287.3 Duv: 0.00084 v': 0.5288

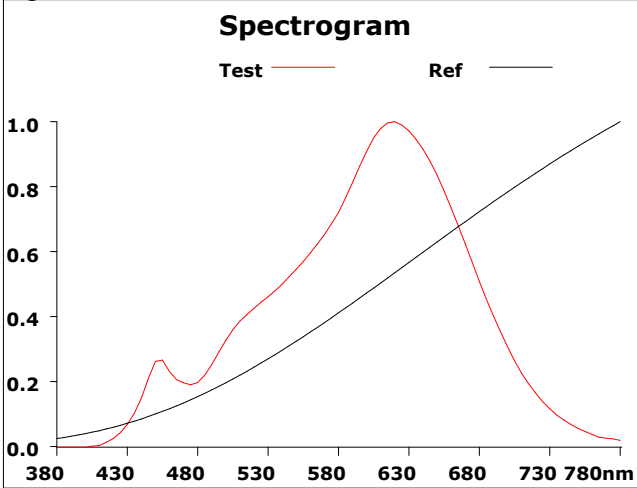


500			
Hue Bin	Rf	Chroma	Hue
1	89.3	-5.2%	0.3%
2	91.9	-3.3%	2.4%
3	92.1	-1.7%	3.3%
4	95.8	-1.8%	0.5%
5	96.8	-0.8%	1.6%
6	96.5	0.4%	1.4%
7	96.0	-1.9%	-0.9%
8	97.4	-0.4%	1.2%
9	95.0	-1.4%	2.2%
10	93.0	-0.2%	3.8%
11	93.1	1.4%	4.2%
12	90.2	3.9%	-2.3%
13	89.1	1.7%	-7.5%
14	86.7	1.5%	-9.8%
15	90.8	-2.7%	-4.0%
16	85.4	-4.6%	-8.8%

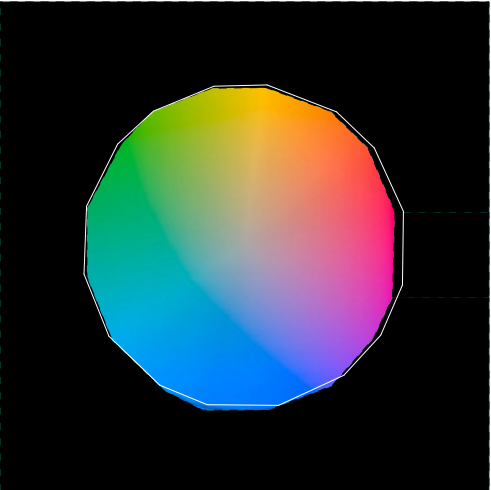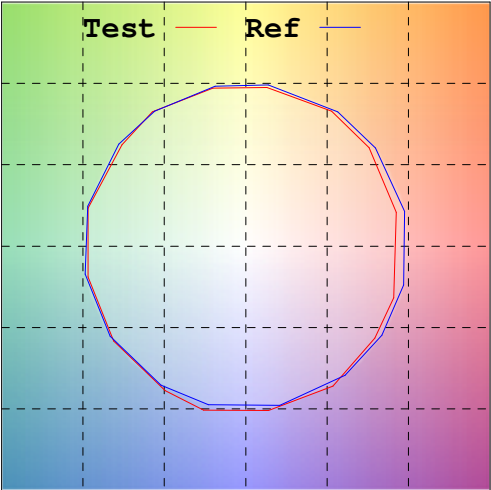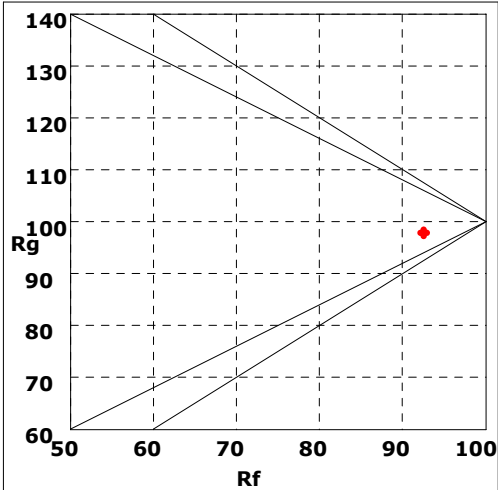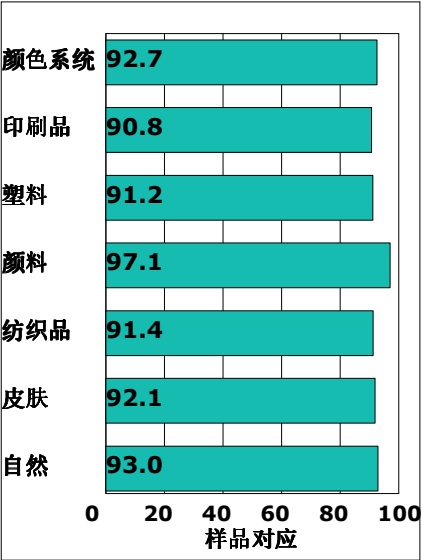

Rf by Bue



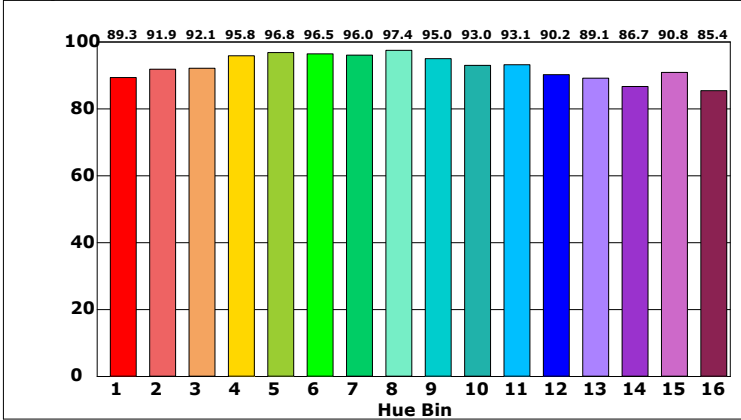


Chroma by Bue

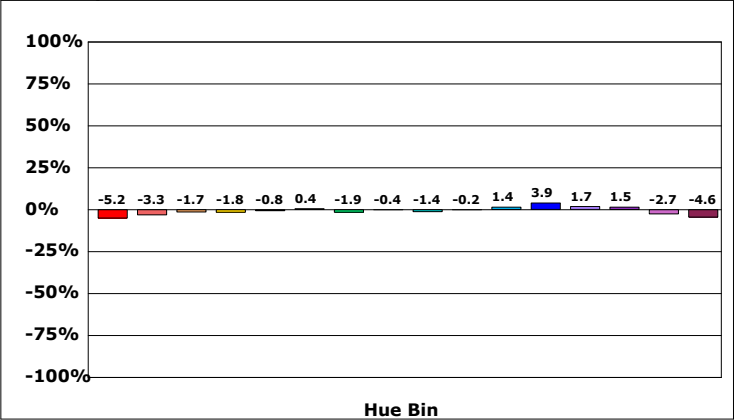

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:09/11/23

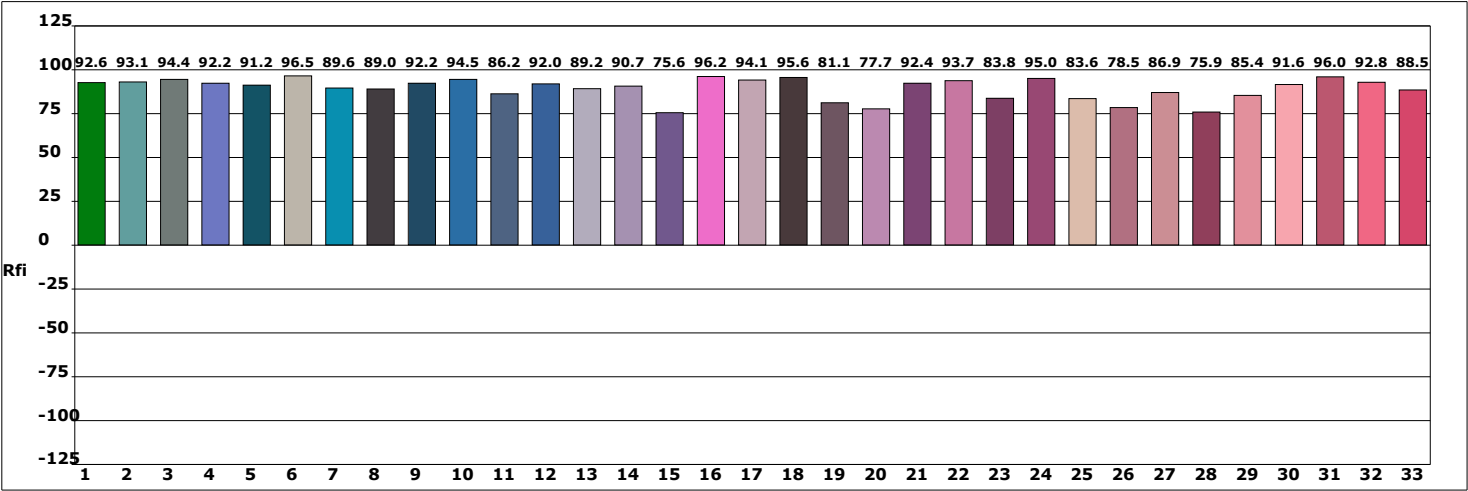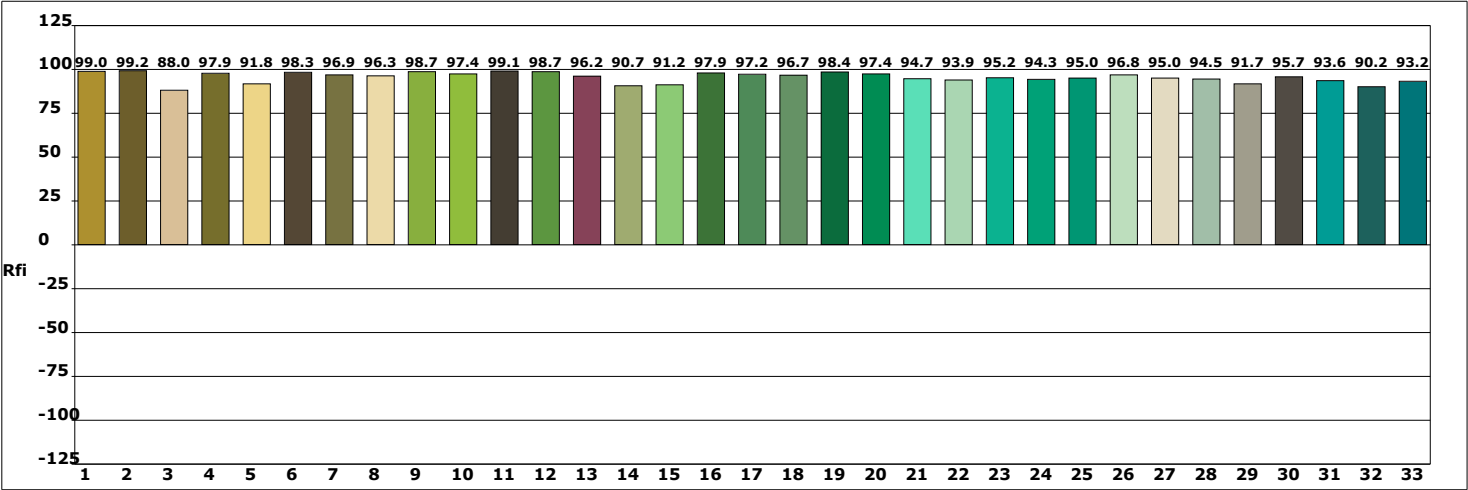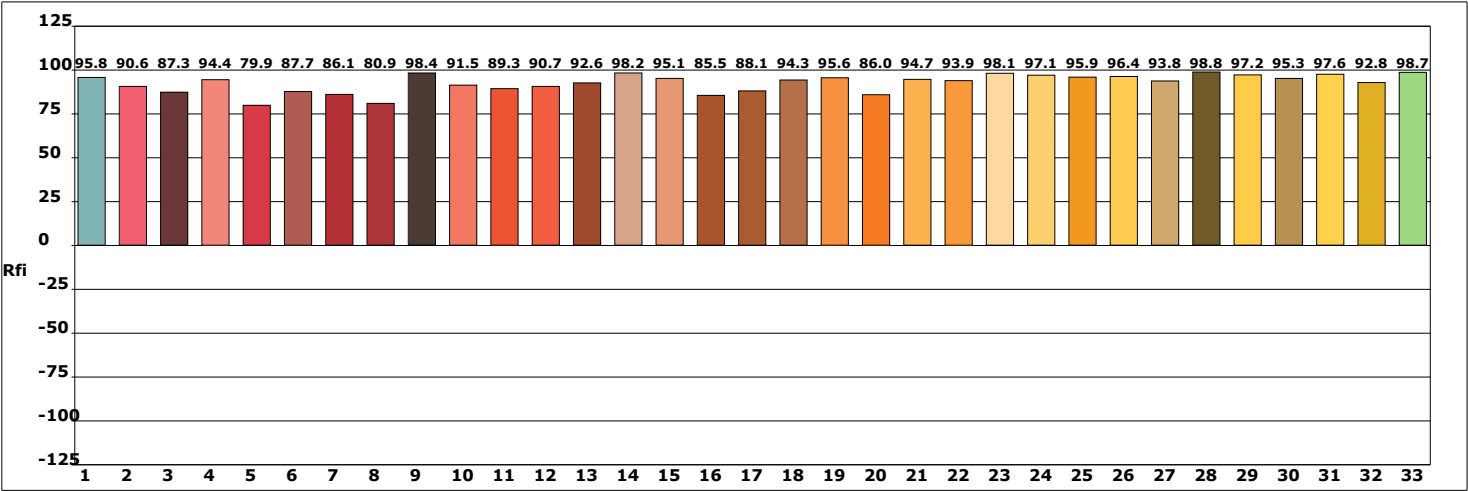

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:09/11/23