



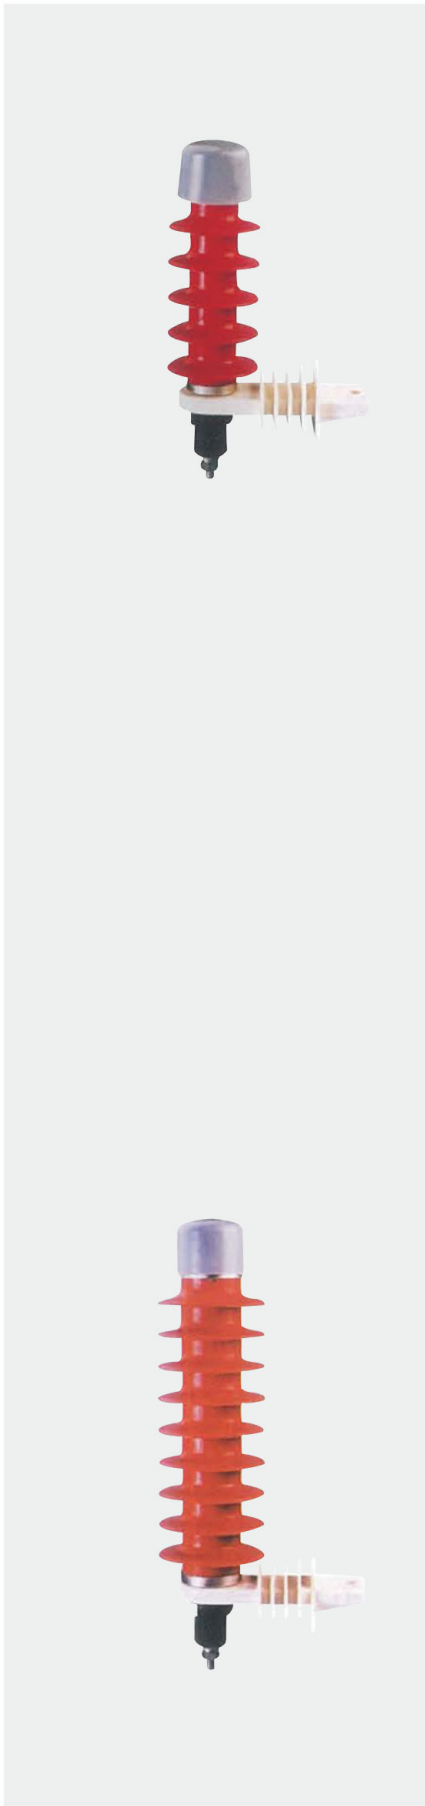


12kV-15kV Arrester


Model	Rated voltage kV	Continuous operating voltage kV	Nominal discharge current kV	Residual voltage			2ms Square Wave	4/10 large current kV	Figure No.
				1/4	8/20	30/60			
YH5W-12/36	12	9.6	5	41	36	32	150	65	34
YH10W-12/36	12	9.6	10	41	36	32	250	100	
YH5W-15/36	15	12.0	5	52	45	40	150	65	
YH10W-15/36	15	12.0	10	52	45	40	250	100	

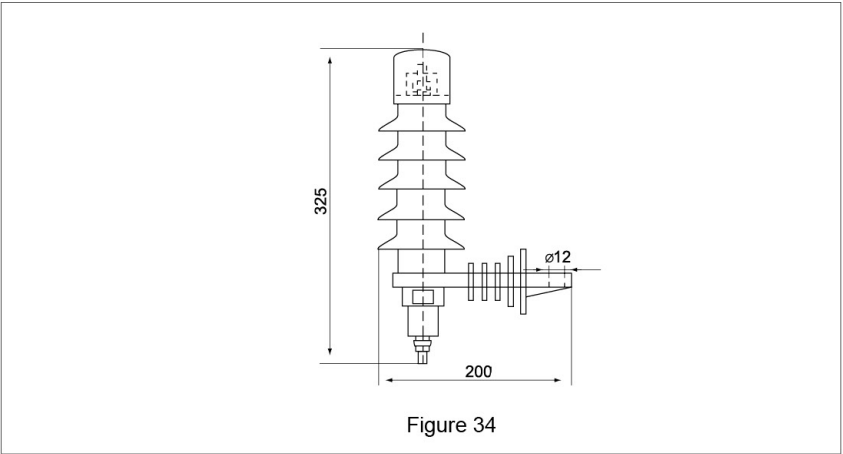

24kV-27kV Arrester

Model	Rated voltage kV	Continuous operating voltage kV	Nominal discharge current kV	Residual voltage			2ms Square Wave	4/10 large current kV	Figure No.
				1/4	8/20	30/60			
YH5W-24/72	24	19.2	5	83	72	64	150	65	36
YH10W-24/72	24	19.2	10	83	72	64	250	100	
YH5W-27/81	27	21.6	5	93	81	72	150	65	
YH10W-27/81	27	21.6	10	93	81	72	250	100	

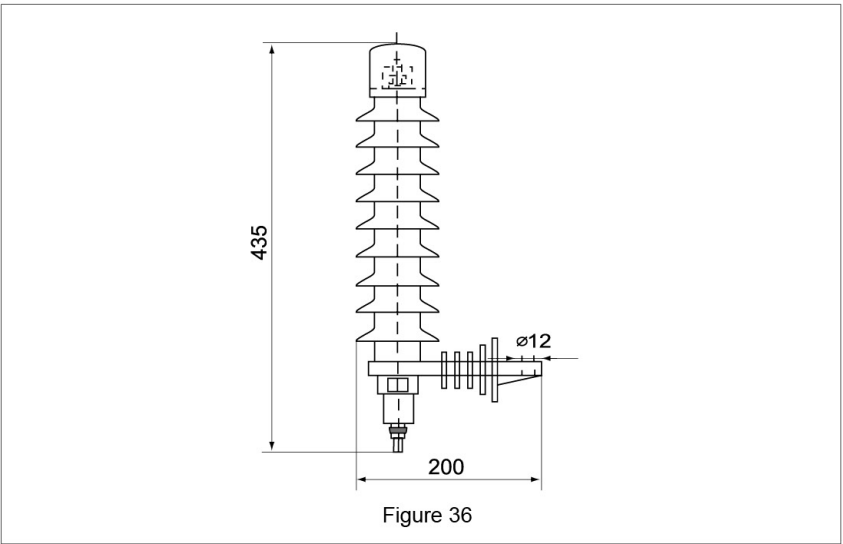

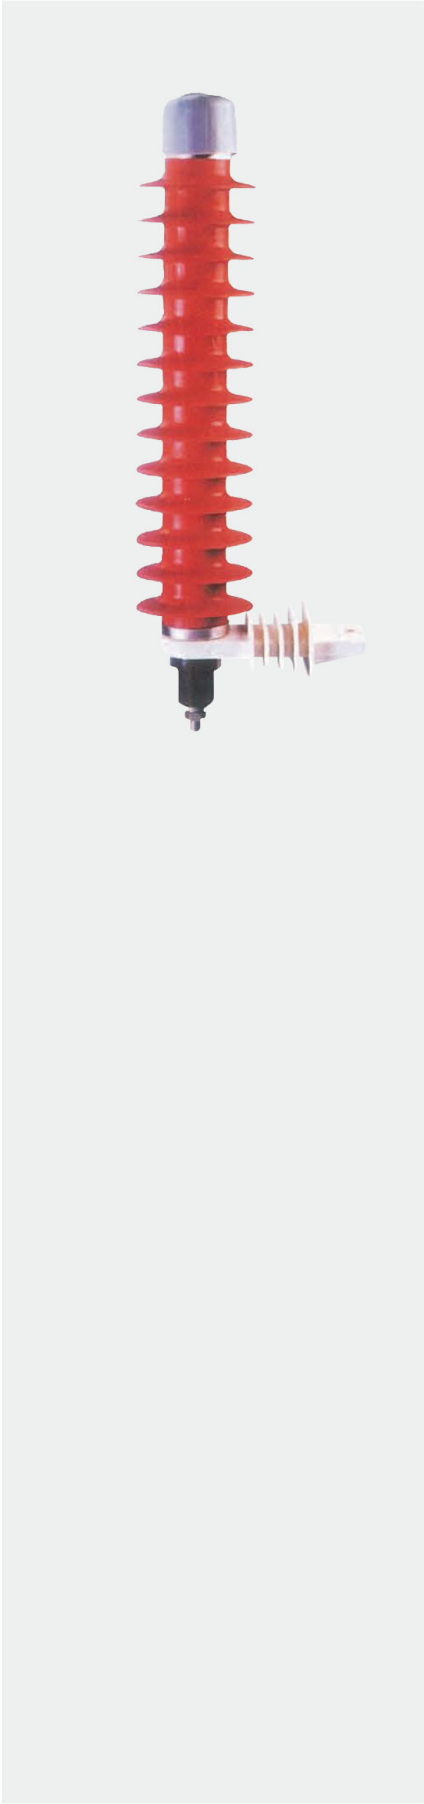

30kV-36kV Arrester

Model	Rated voltage kV	Continuous operating voltage kV	Nominal discharge current kV	Residual voltage			2ms Square Wave	4/10 large current kV	Figure No.
				1/4	8/20	30/60			
YH5W-30/90	30	24	5	104	90	80	150	65	37
YH10W-30/90	30	24	10	104	90	80	250	100	
YH5W-33/99	33	26.4	5	110	99	89	150	65	
YH10W-33/99	33	26.4	10	110	99	89	250	100	
YH5W-36/108	36	28.8	5	124	108	96	150	65	
YH10W-36/108	36	28.8	10	124	108	96	250	100	

