SIEMENS

Data sheet 3VA9233-0JA12

box terminal 3 units accessory for: 3VA5 250



Model	
product brand name	SENTRON
product designation	accessories
Accessories	Box terminal
General technical data	
designation / of the terminal	TS1.4
Voltage	
Current	
Mechanical Design	
Connections according IEC	
IEC-marking / of terminals	NXB 25-185 mm² AWG4-350 kcmil
connectable conductor cross-section	
● for copper cable / stranded / minimum	25 mm²
● for copper cable / stranded / maximum	185 mm²
stripped length	20 mm
thickness / of the busbar / maximum	2x-6x[15.5x0.8]
Connetctions according UL	
UL-marking / of terminals	TS1.4 Xuebote
stripped length	0.8 in
connectable conductor cross-section	
● for copper cable / stranded / minimum	4 AWG
● for copper cable / stranded / maximum	350 kcmil
● for copper cable / finely stranded / minimum	4 AWG
● for copper cable / finely stranded / maximum	350 kcmil
tightening torque / when using copper cables	
● stranded	4 - 1 AWG: 70 lb-in 1/0 - 350 kcmil: 140 lb-in
● finely stranded	4 - 1 AWG: 70 lb-in 1/0 - 350 kcmil: 140 lb-in
Certificates	
General Product Approval	

General Product Approval	EMC	Declaration of Conformity

Subject to change without notice
© Copyright Siemens

Miscellaneous


Declaration of Conformity	Shipping Approval	other
		Manufacturer Declaration

other
Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9233-0JA12
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3VA9233-0JA12
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9233-0JA12
Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

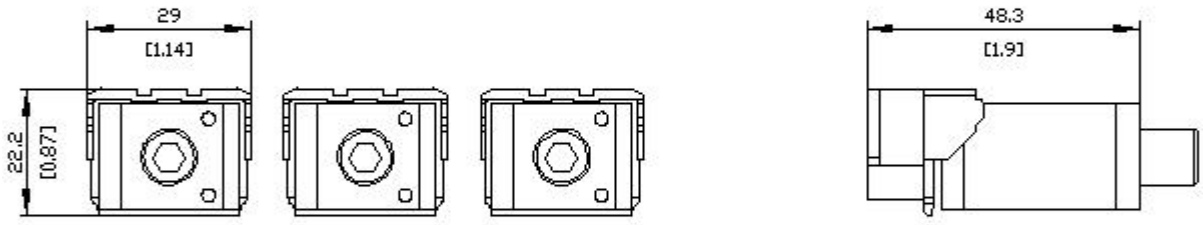

last modified: 10/22/2020

Subject to change without notice
© Copyright Siemens