ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1885-1985 MHz Cavity Bandpass Filter

Part Number: AB1935B1217

ISO 9001 REGISTERED FIRM

Electrical specifications

Frequency Range: 1885-1985 MHz
Center Frequency: 1935 MHz
Bandwidth: 100 MHz
Insertion Loss: <1.5 dB
Return Loss: >15dB
Rejection: ≥40dB@1875MHz
≥40dB@1995MHz

Mechanical


Connectors: N-type (f)
Dimensions: 6.3 x 2.64 x 1.3 in

Environmental

Temperature Range: -30 to +85 deg. C

This product is RoHs compliant.

Outline Drawing:

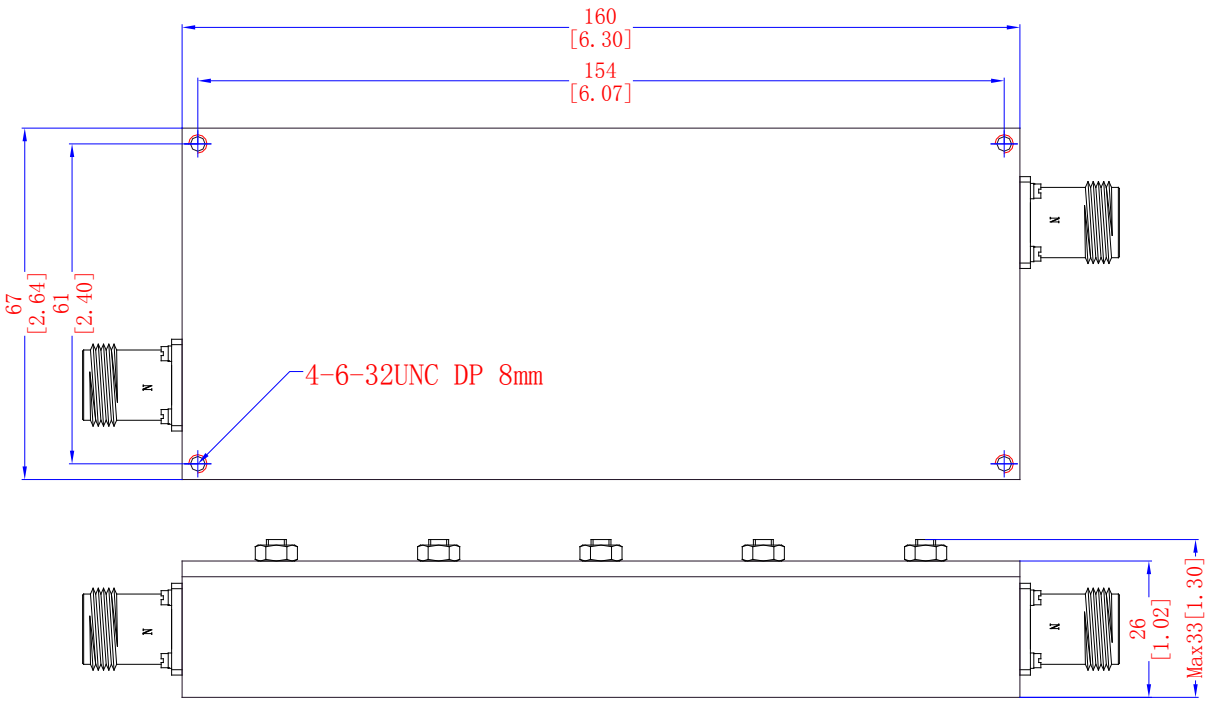

70 Outwater Lane
Garfield, NJ 07026
Phone: (973) 772-4242
Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com