Quantum Microwave


www.QuantumMicrowave.com


Specifications:

- WR-42 Waveguide to Coax Adapter
- Frequency:18 to 26.5 GHz
- Insertion Loss: 0.3 dB Max
- VSWR: 1.25:1 Max
- Material: Copper Waveguide w/ Brass Flanges
- Finish: Gold Plated
- Waveguide: WR-42, UG-595/U, Square
- Connector Type: K-Female (2.92 mm)



QMC-WC42-KSFRAU is a Gold Plated, Female Waveguide to Coaxial adapter designed to operate within the K Band, with a frequency range of 18 to 26.5 GHz. This adapter is a WR-42 waveguide with precision tolerances.



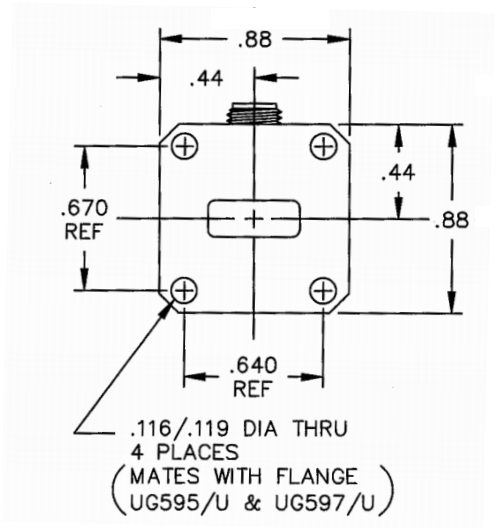

Made in the USA

Sales@QuantumMicrowave.com