SIEMENS

Data sheet 3VA9373-0JK13

WIRE CONNECTOR CU WITH CONTROL WIRE TAP 3 PCS.
ACCESSORY FOR: 3VA5/6 400/600



Model	
product brand name	SENTRON
product designation	accessories
Product version	circular conductor terminal
Accessories	Wire connector
General technical data	
designation / of the terminal	TC1.5
Voltage	
Current	
Mechanical Design	
Connections according IEC	
IEC-marking / of terminals	50-300 mm² CU 400A NNL
stripped length	28 mm
Connetctions according UL	
UL-marking / of terminals	TC1.5 CMC 1-600 CU9 UR CSA
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
stripped length	1.1 in
connectable conductor cross-section	
● for copper cable / stranded / minimum	1 AWG
● for copper cable / stranded / maximum	600 kcmil
● for copper cable / finely stranded / minimum	1 AWG
● for copper cable / finely stranded / maximum	600 kcmil
tightening torque / when using copper cables	
● stranded	1 AWG - 600 kcmil: 500 lb-in
● finely stranded	1 AWG - 600 kcmil: 500 lb-in
Certificates	

General Product Approval			EMC		Declaration of Conformity
UL	UL	Miscellaneous	EAC	RCM	CE EG-Konf.

Declaration of Conformity	Shipping Approval

Subject to change without notice
© Copyright Siemens













other


Manufacturer Declaration

Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9373-0JK13
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3VA9373-0JK13
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9373-0JK13
Tender specifications
http://www.siemens.com/specifications

© Copyright Siemens

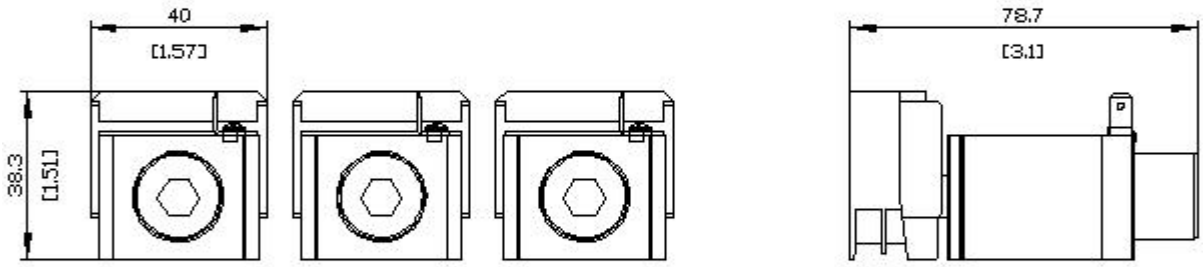

last modified: 12/20/2020

Subject to change without notice
© Copyright Siemens