ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

6000 MHz Suspended Stripline High Pass Filter

Part Number: AE6000SSH6598

ISO 9001 REGISTERED FIRM

Electrical Specifications

Cut Off Frequency: 6.0GHz
Pass Band Frequency: 6.0～24.5GHz
Pass Band Insertion Loss:
≤1.5dB @ 6.0～6.2GHz
≤1.0dB @ 6.2～24.5GHz
Pass Band VSWR:
≤1.5:1 @ 6.0～20GHz
≤1.8:1 @ 20～24.5GHz
Stop Band Attenuation: ≥50dB @ DC～4.9GHz
Impedance: 50 Ohms
Power Handling: ≤15W


Mechanical

Mounting Method: Through Holes
Connector Type: SMA-Female
Dimensions: 22 x 16 x 10 mm

Environmental

Operating Temperature: -45˚ to +85˚ C
Storage Temperature: -55˚ to +95˚ C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

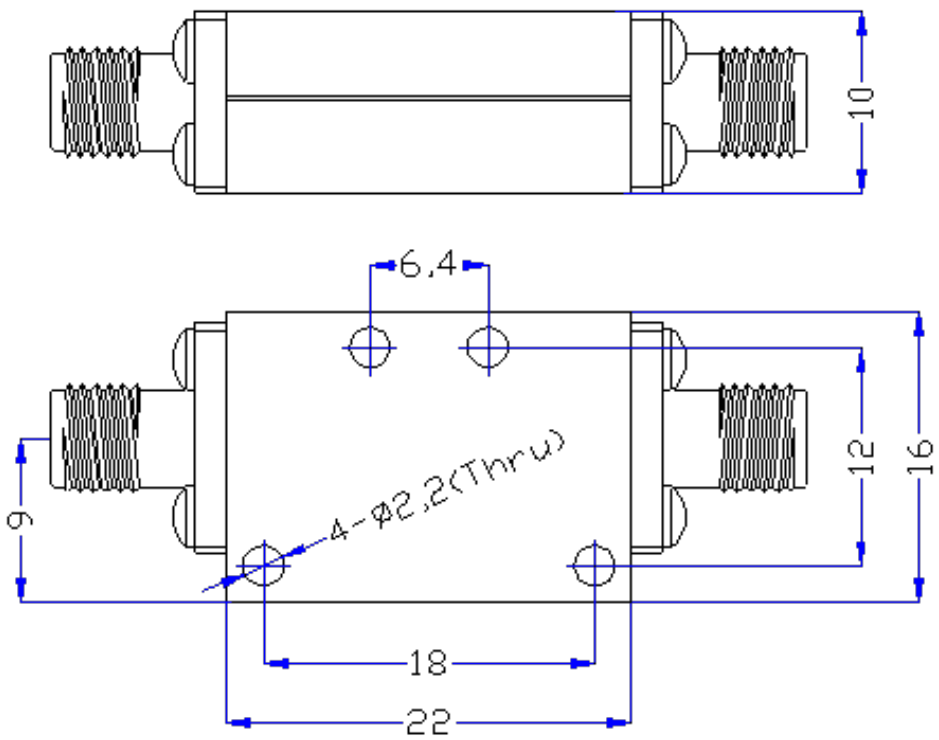

70 Outwater Lane
Garfield, NJ 07026
Phone: (973) 772-4242
Fax : (973) 772-4646
Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com