



Oct.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

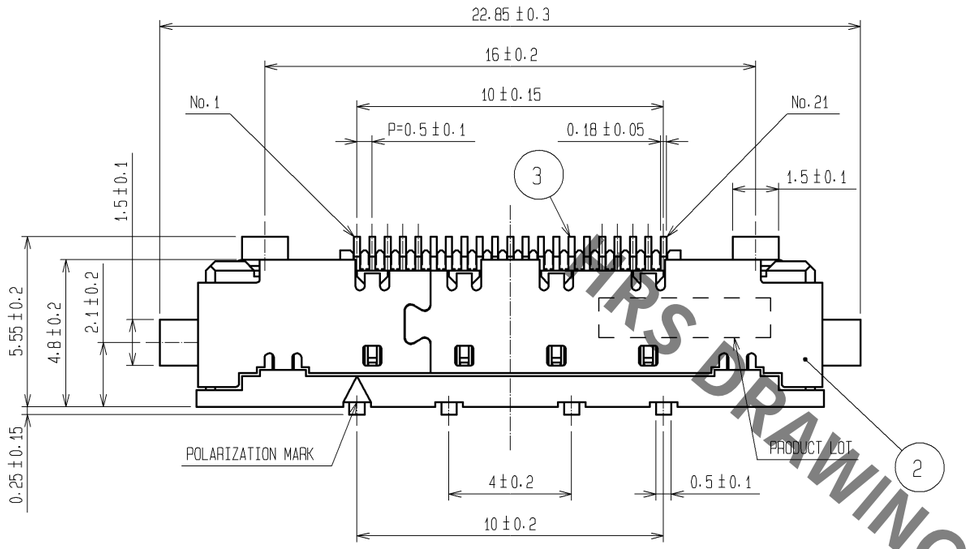

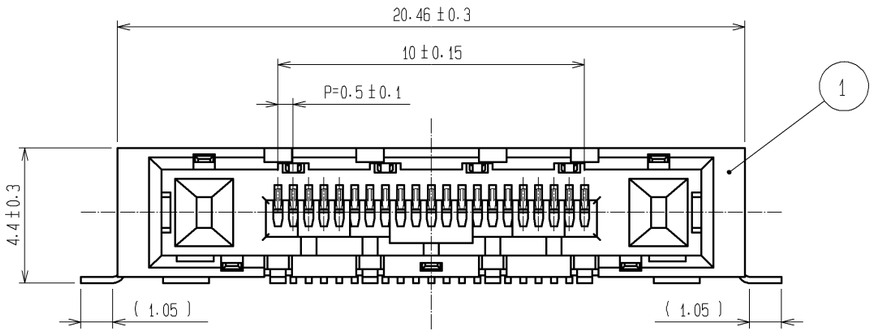

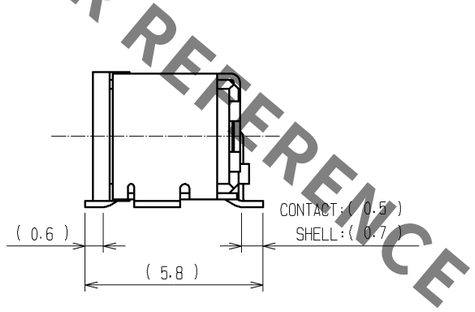

RECOMMENDED LAND PATTERN DIMENSION (4:1)

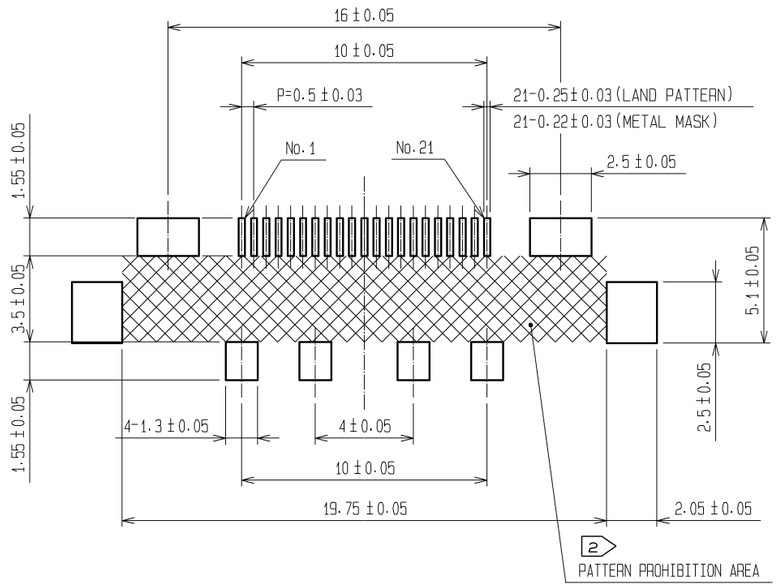

HRS DRAWING FOR REFERENCE

NOTE
1. LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
2. ▨ AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
3. ( )INDICATES A REFERENCE DIMENSION.
4. MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
5. PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.

NO.	MATERIAL	FINISH , REMARKS
5	PE	(COVER TAPE)
4	PS	(EMBOSSED CARRIER TAPE)
2	PHOSPHOR BRONZE	OVER PLATING:TIN PLATING 1μm min UNDER PLATING:NICKEL 0.2μm min
3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min LEAD AREA:GOLD 0.03μm min UNDER PLATING:NICKEL 1μm min
1	LCP	BLACK, UL94V-0

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				

HIROSE ELECTRIC CO., LTD.

APPROVED	HS. OKAWA	11.09.15
CHECED	HT. YAMAGUCHI	11.09.15
DESIGNED	TS. MIYAKI	11.09.15
DRAWN	TS. MIYAKI	11.09.15


DRAWING NO.	EDC3-157339-02
PART NO.	FX16-21S-0.5SH(30)
CODE NO.	CL575-3411-5-30

△ 1/2

Oct.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


DRAWING FOR PACKING(2:1)


THE DIRECTION OF PULLING OUT

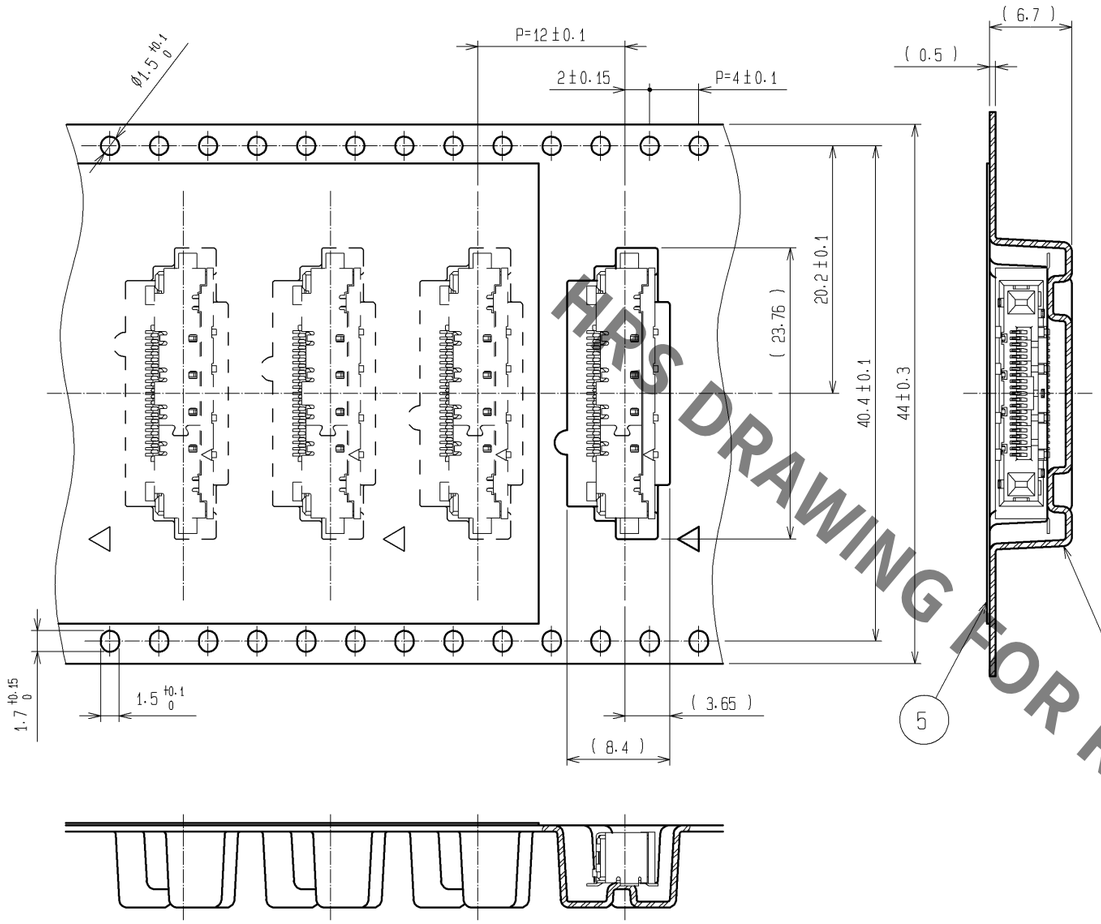

FOR REFERENCE

REELED DIMENSION (FREE)

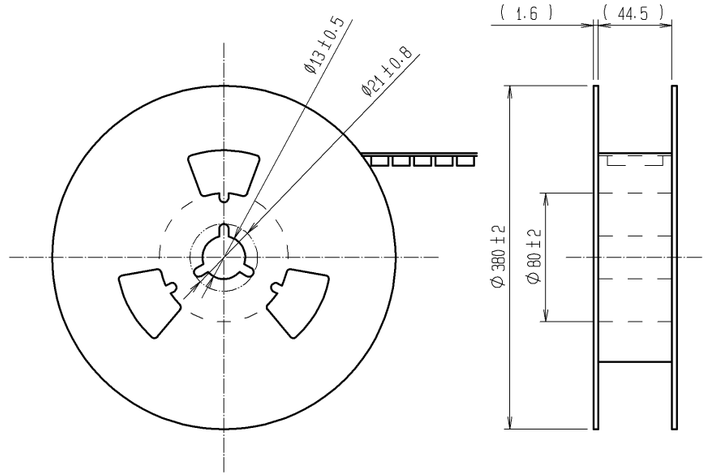

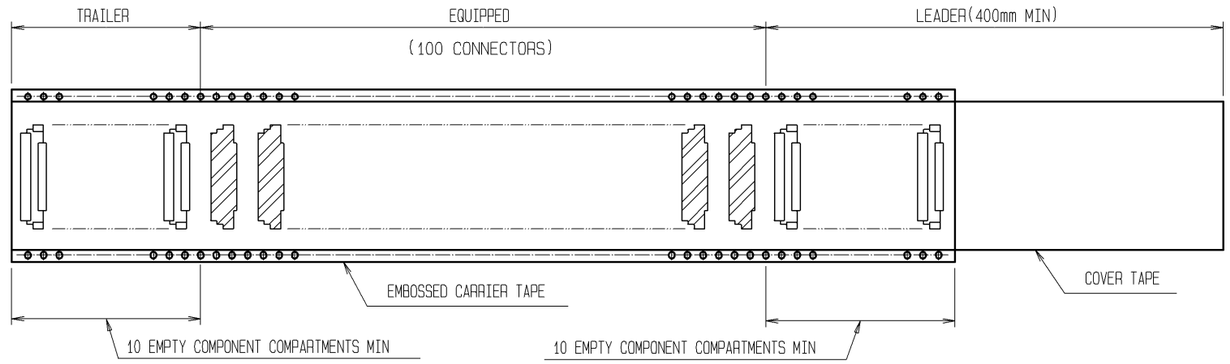

DRAWING NO.	EDC3-157339-02
PART NO.	FX16-21S-0.5SH(30)
CODE NO.	CL575-3411-5-30

△ 2/2