

F400C

F400C high-power fresnel light, using RGBALC six in one lamp beads, with uniform color mixing. The color temperature can be accurately adjusted from 1800K to 8500K. Supports manual zoom from 20 ° to 60 °, equipped with DMX/RDM control and multiple channel modes, suitable for professional theaters, studios, high-end conferences and other scenarios


Key features:

- 1800K-8500K tunable color temperature
- Each color has an average of 60W
- 20 ° -60 ° manually adjustable, flexible coverage at different distances
- Supports DMX and RDM
- Lightweight and compact, only 4.8kg, compact body
- DMX and RDM controls
- Uniform color mixing


Application:

- Broadcast, HD studio
- Theatre, church
- Exhibition lighting
- Museum


Accessories:



Barn door




Gel frame

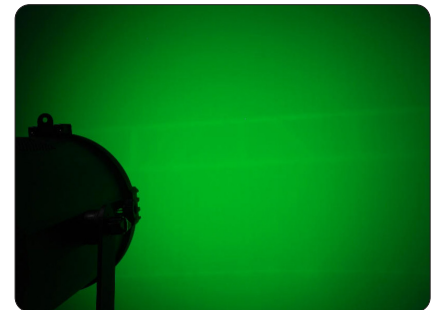

Photometric


R(lx)	2570	657	301	178	117	93	64	53	44	37
G(lx)	3790	997	431	269	183	137	97	79	66	56
B(lx)	746	190	84	50	33	26	18	14	11	9
A(lx)	3740	959	409	251	169	127	90	75	62	52
L(lx)	6720	1630	736	450	305	228	164	133	110	93
C(lx)	2000	545	241	139	99	72	50	41	34	30
1800K(lx)	9950	2570	1180	648	456	341	246	202	166	137
8500K(lx)	11000	2820	1300	763	506	381	273	222	123	153
Full on(lx)	10000	2570	1170	683	456	346	244	199	164	135

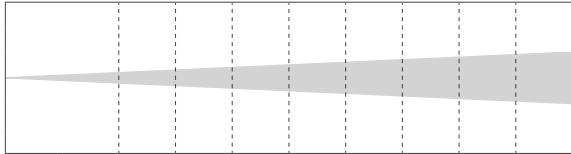

Distance(m) 1 2 3 4 5 6 7 8 9 10

Minimum Spot - 20°

R(lx)	1410	364	193	115	70	55	40	31	26	20
G(lx)	2080	587	295	179	109	86	63	50	42	32
B(lx)	438	115	57	34	22	16	12	9	7	7
A(lx)	1920	542	273	162	98	78	57	45	39	30
L(lx)	3290	921	464	277	170	135	98	77	67	50
C(lx)	1100	295	154	92	57	44	32	26	22	17
1800K(lx)	5170	1450	707	403	263	208	150	117	101	76
8500K(lx)	5490	1600	819	464	265	231	160	132	114	86
Full on(lx)	5360	1440	733	436	296	208	151	119	102	73

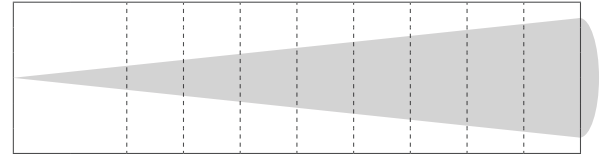

Distance(m) 1 2 3 4 5 6 7 8 9 10

Maximum Spot - 60°

Technical Data

Power supply: AC100-240V, 50/60Hz

Color: RGBALC

Color temperature: 1800K - 8500K

Power connection: Power in & out

Signal connection: 3-pin XLR in & out

Control channels: 1/2/3/4/6/7/13/21/RGB 10/RGB 15/CMY 10/CMY 15 CH

Control mode: DMX ,RDM

Housing: Colour black

Size: 343 x 251 x 314mm

N.W.: 4.8kg

Environment: IP20

