



光谱图

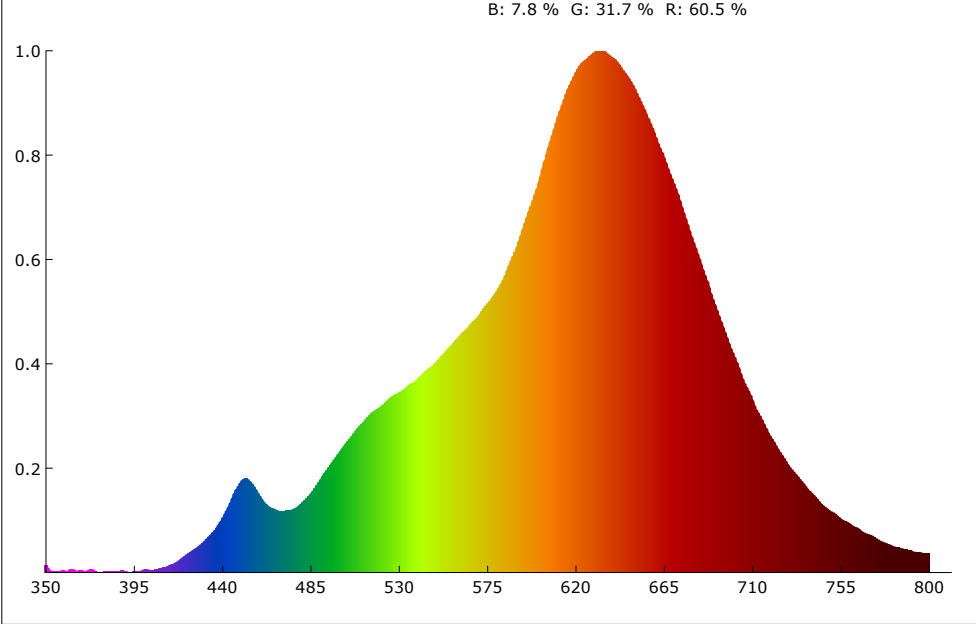

SDCM

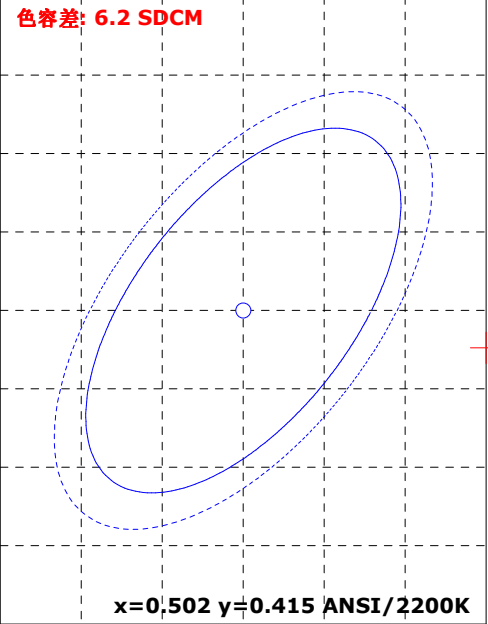

颜色参数:

坐标x: 0.4898 坐标y: 0.4077 坐标u: 0.2834 坐标v: 0.3539 坐标u': 0.2834 坐标v': 0.5308
红色比: 60.5 % 绿色比: 31.7 % 蓝色比: 7.8 % 光通量红色比: 30.7 % 光通量绿色比: 68.1 % 光通量蓝色比: 1.2 %

显色指数: 95.4 AvgR: 94.4
R1: 97.6 R2: 97.4 R3: 98.9 R4: 95.6 R5: 96.1 R6: 91.9 R7: 94.2 R8: 92.0
R9: 84.8 R10: 95.4 R11: 90.3 R12: 88.7 R13: 96.8 R14: 98.5 R15: 97.8


色温: 2310 K 光通量: 2910.317 lm 峰值波长: 630.5 nm 色容差: 6.2
明暗视觉比: 1.1 中心波长: 631.9 nm 主波长: 587.3 nm 质心波长: 616.4 nm
半宽度: 119.9 nm 色偏差: -0.00237 色纯度: 69.4 % 色质指数: 86.0
LER(TM-30): 241.7 辐射功率: 12039.1 mw 色域指数(Rg): 103.5 逼真度(Rf): 93.6
红光辐射功率: 6526.8 mw 近红辐射功率: 1165.1 mw 远红辐射功率: 74.5 mw

电参数:





光效: 15.5 Lm/W 能效: 16.9 能效等级: G
电压: 221.3 V 电流: 0.890 A 功率: 188.000 W 功率因素: 0.954

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/26/14
备注:


Rf: 93.6 CCT: 2310K u': 0.2834
Rg: 103.5 LER: 241.7 Duv: -0.00237 v': 0.5308

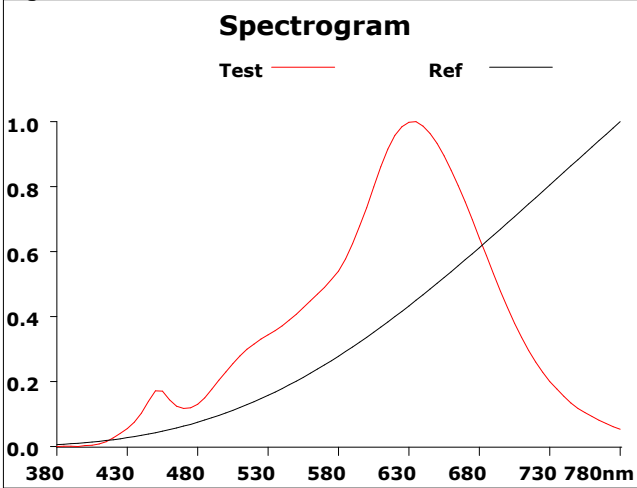

500			
Hue Bin	Rf	Chroma	Hue
1	95.4	-1.7%	-0.0%
2	95.9	-0.4%	1.1%
3	92.7	1.5%	2.4%
4	95.0	2.6%	1.0%
5	94.9	3.6%	1.7%
6	91.3	5.7%	1.2%
7	92.7	3.3%	-2.5%
8	92.0	4.0%	-2.9%
9	94.4	1.6%	-2.4%
10	95.2	0.7%	-2.4%
11	95.4	2.0%	-1.7%
12	92.4	2.0%	-3.5%
13	88.4	3.2%	-9.5%
14	88.0	1.8%	-7.3%
15	94.5	0.0%	-3.5%
16	91.7	-1.6%	-5.1%

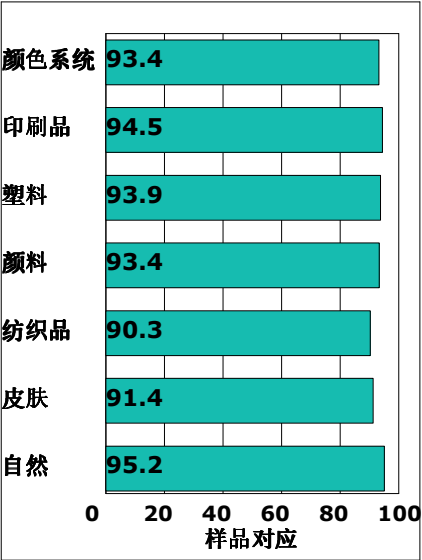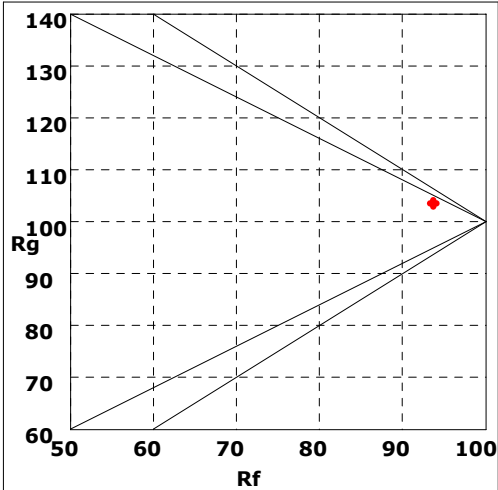
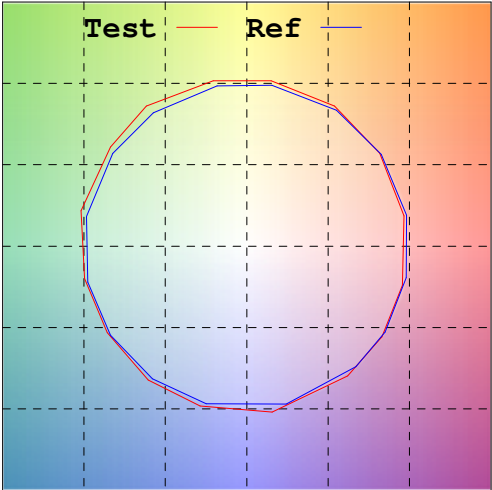
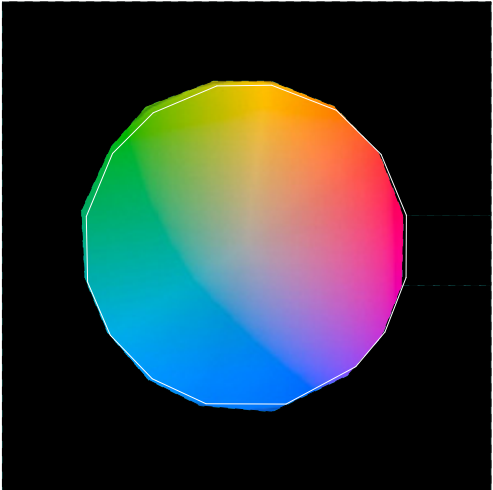


Rf by Bue

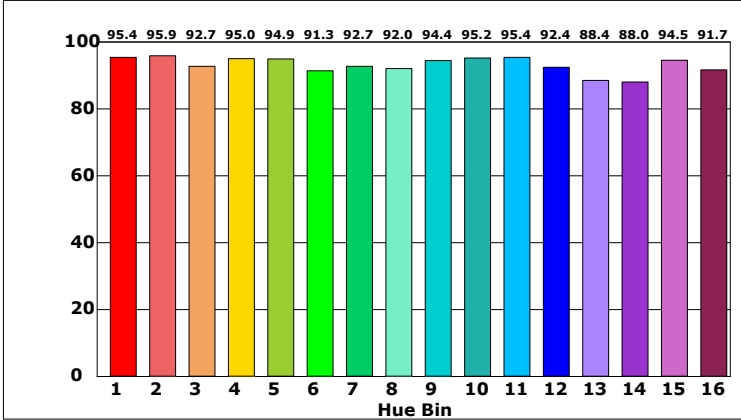


Chroma by Bue




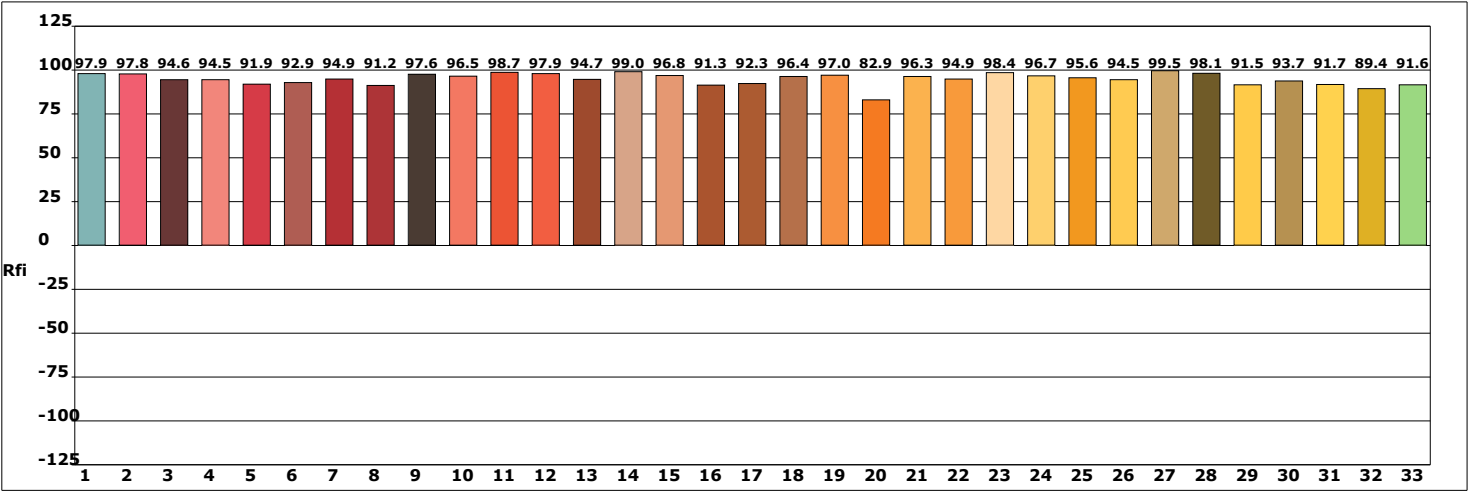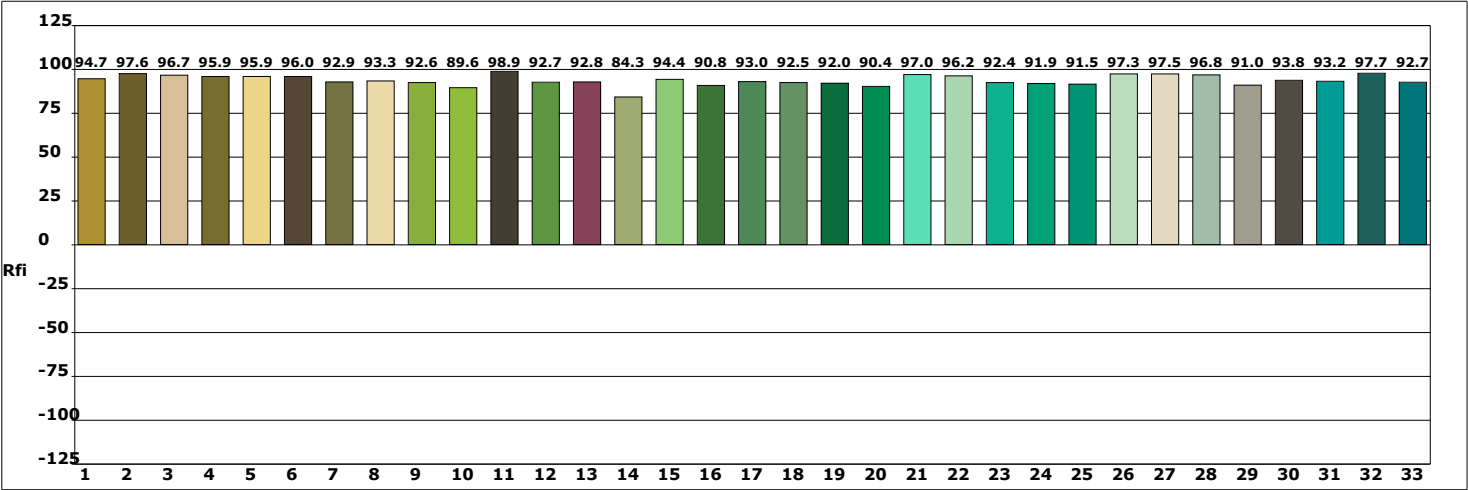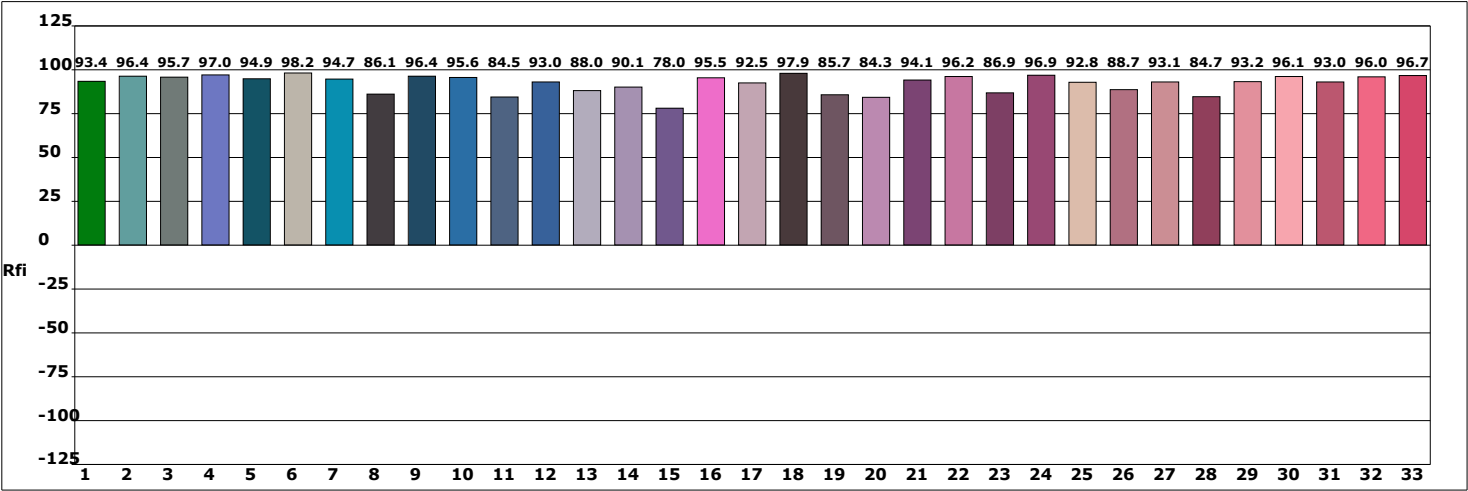

光谱图

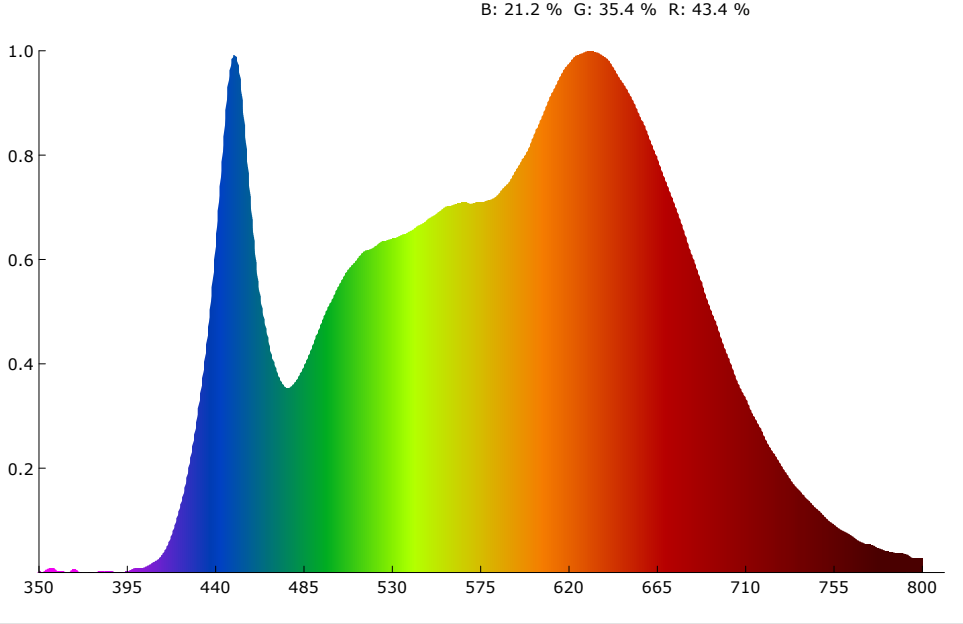

SDCM

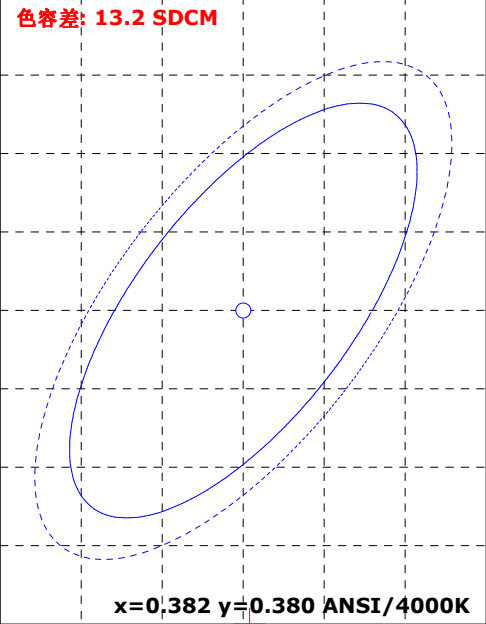

颜色参数:

坐标x: 0.3822 坐标y: 0.3542 坐标u: 0.2357 坐标v: 0.3277 坐标u': 0.2357 坐标v': 0.4915
红色比: 43.4 % 绿色比: 35.4 % 蓝色比: 21.2 % 光通量红色比: 22.2 % 光通量绿色比: 74.8 % 光通量蓝色比: 3.0 %

显色指数: 92.9 AvgR: 91.0
R1: 91.2 R2: 94.9 R3: 95.5 R4: 90.1 R5: 91.6 R6: 92.5 R7: 96.6 R8: 91.1
R9: 77.7 R10: 91.7 R11: 86.9 R12: 88.9 R13: 91.7 R14: 96.5 R15: 88.6


色温: 3763 K 光通量: 3603.602 lm 峰值波长: 630.5 nm 色容差: 13.2
明暗视觉比: 1.8 中心波长: 594.0 nm 主波长: 588.5 nm 质心波长: 583.9 nm
半宽度: 194.8 nm 色偏差: -0.01140 色纯度: 21.0 % 色质指数: 84.6
LER(TM-30): 252.4 辐射功率: 14279.5 mw 色域指数(Rg): 106.7 逼真度(Rf): 92.5
红光辐射功率: 5753.4 mw 近红辐射功率: 974.0 mw 远红辐射功率: 51.8 mw

电参数:







光效: 18.9 Lm/W 能效: 20.5 能效等级: G
电压: 221.0 V 电流: 0.904 A 功率: 191.000 W 功率因素: 0.956

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/26/14
备注:

Rf: 92.5 CCT: 3763K u': 0.2357
Rg: 106.7 LER: 252.4 Duv: -0.01140 v': 0.4915



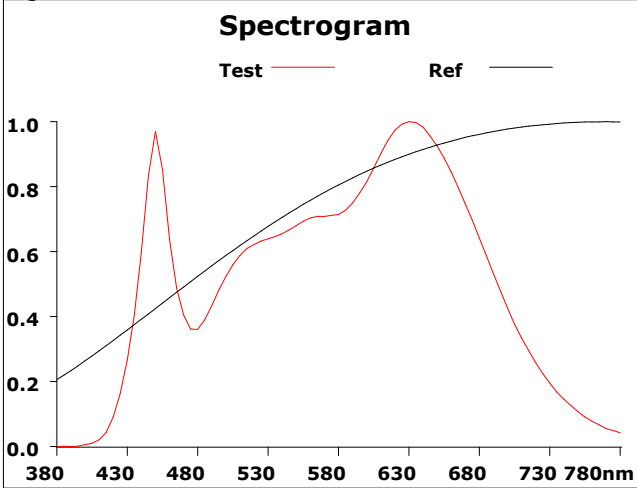


500			
Hue Bin	Rf	Chroma	Hue
1	94.4	2.2%	-0.5%
2	95.4	1.7%	0.2%
3	92.7	2.2%	2.5%
4	94.1	1.6%	2.2%
5	91.9	2.7%	2.3%
6	90.6	5.9%	1.6%
7	92.6	4.4%	-0.3%
8	92.2	3.5%	-1.1%
9	94.5	2.1%	-0.4%
10	95.9	0.5%	0.7%
11	90.1	2.3%	5.5%
12	88.6	3.9%	4.5%
13	93.8	3.7%	2.2%
14	90.2	6.9%	2.3%
15	91.1	5.1%	0.2%
16	89.1	5.0%	-3.5%

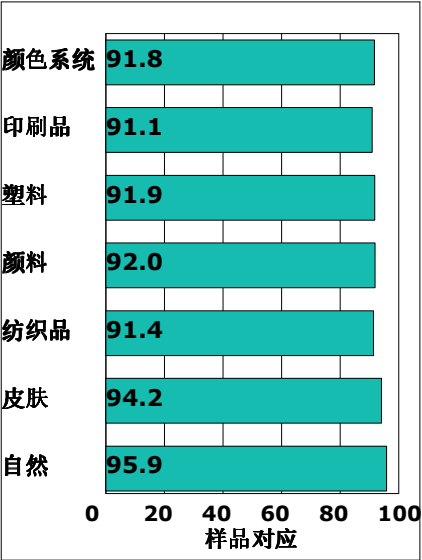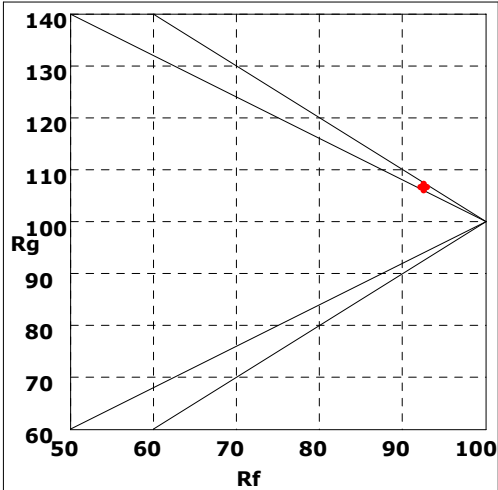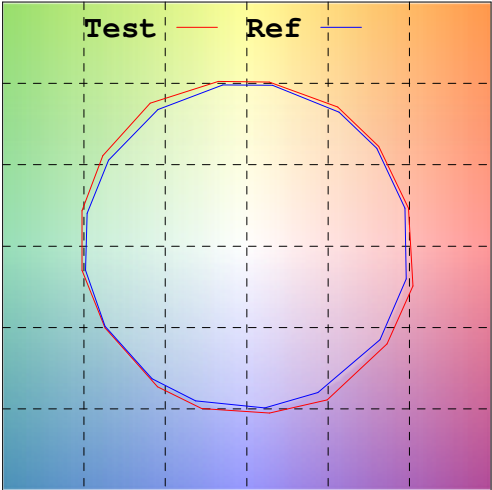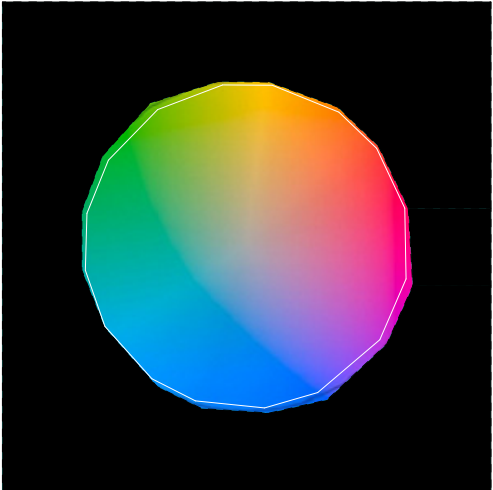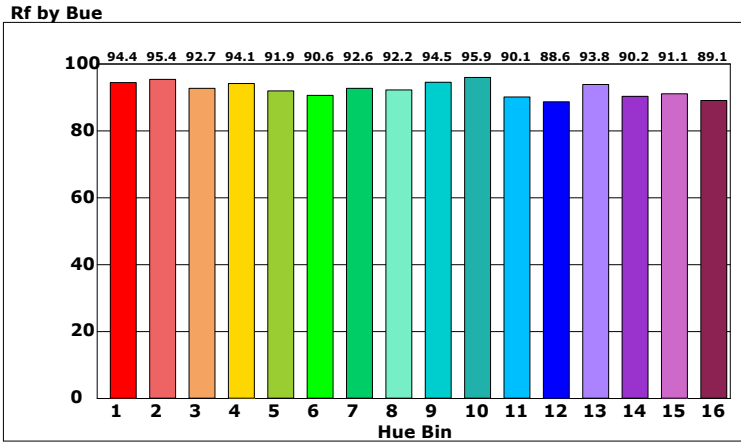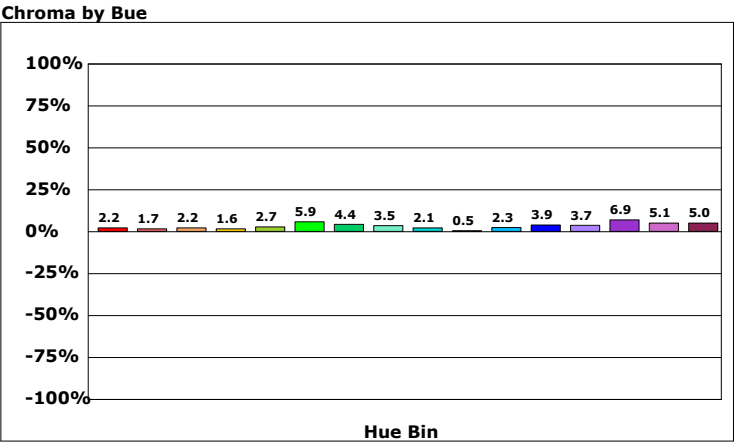


产品型号:
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:07/26/14

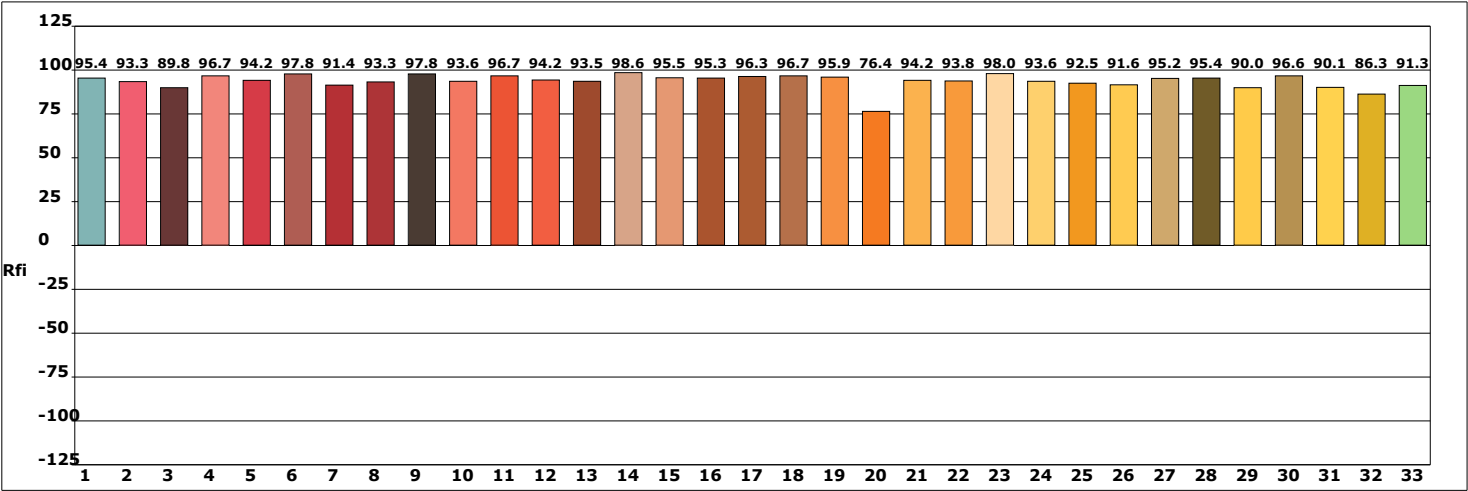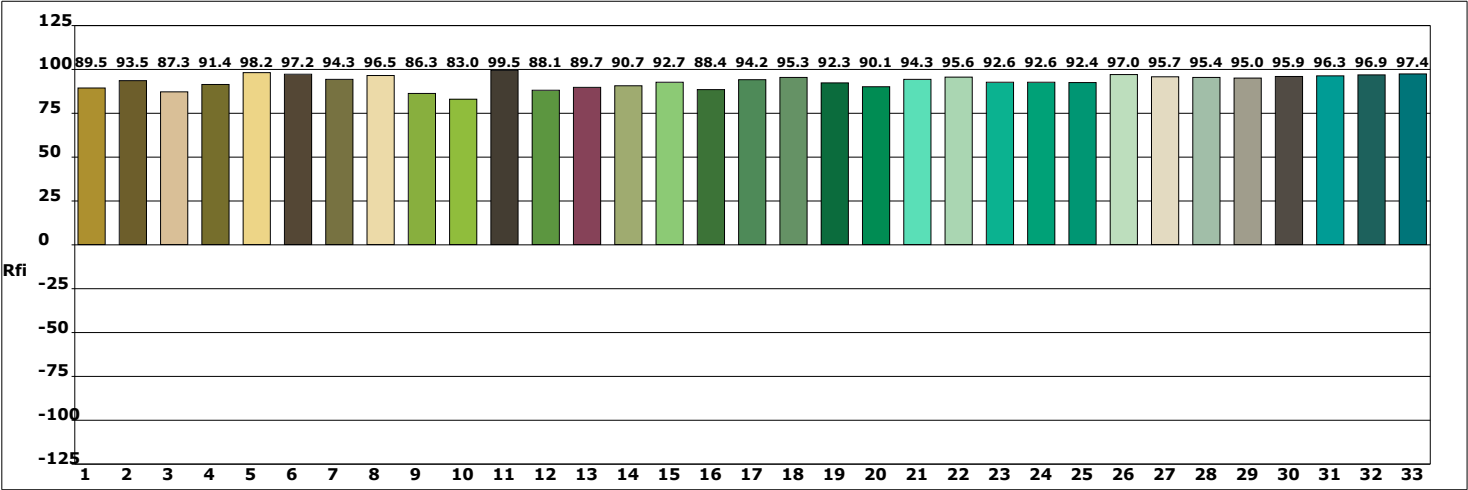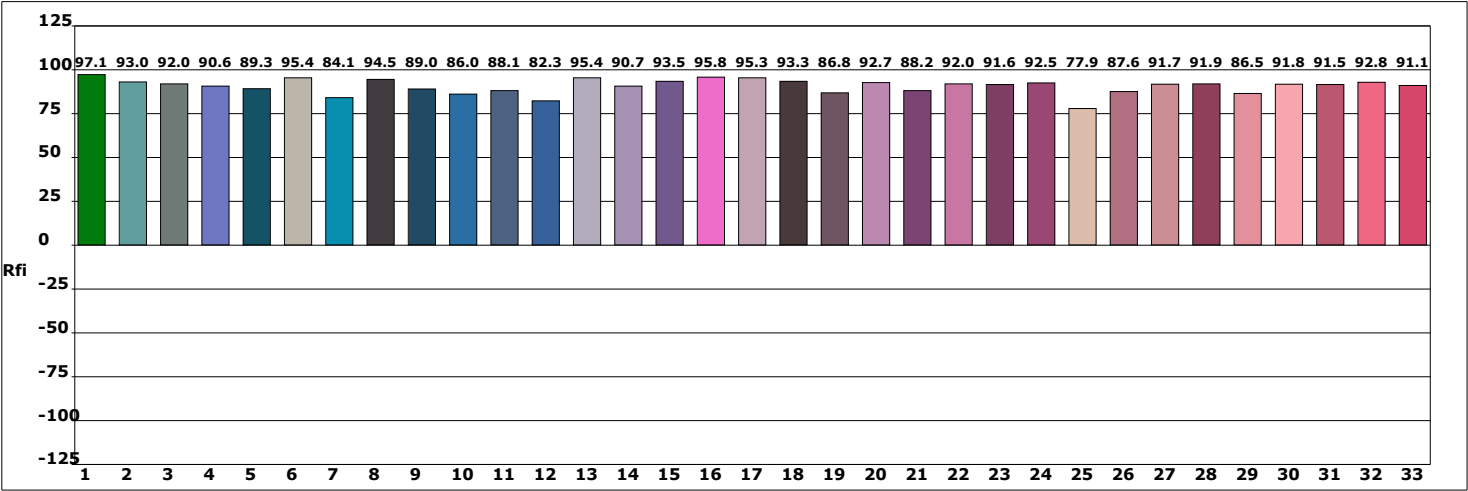

光谱图

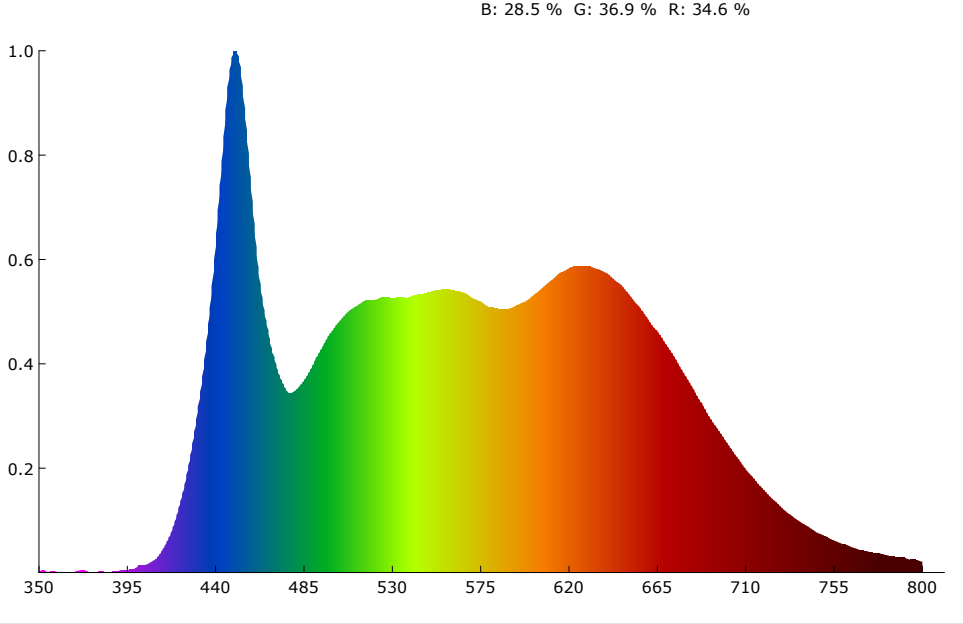

SDCM

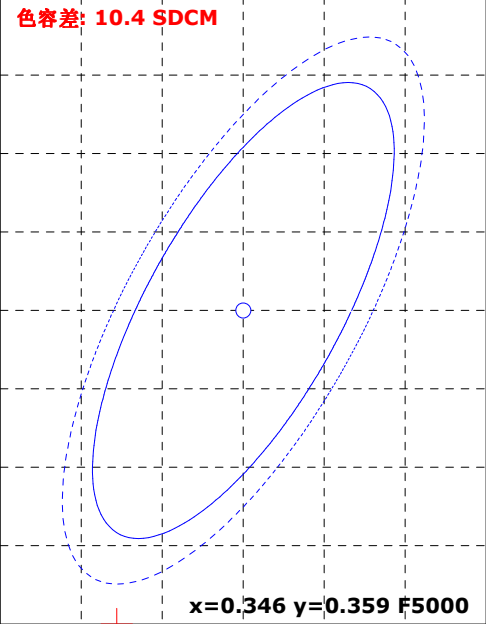

颜色参数:

坐标x: 0.3372 坐标y: 0.3300 坐标u: 0.2146 坐标v: 0.3150 坐标u': 0.2146 坐标v': 0.4725
红色比: 34.6 % 绿色比: 36.9 % 蓝色比: 28.5 % 光通量红色比: 18.1 % 光通量绿色比: 78.0 % 光通量蓝色比: 4.0 %

显色指数: 93.4 AvgR: 91.6
R1: 92.9 R2: 96.4 R3: 92.3 R4: 90.8 R5: 94.2 R6: 94.2 R7: 95.7 R8: 91.0
R9: 77.2 R10: 94.8 R11: 88.6 R12: 86.9 R13: 93.8 R14: 94.9 R15: 89.7


色温: 5271 K 光通量: 3891.586 lm 峰值波长: 450.6 nm 色容差: 10.4
明暗视觉比: 2.2 中心波长: 451.4 nm 主波长: 0.0 nm 质心波长: 567.2 nm
半宽度: 27.2 nm 色偏差: -0.00797 色纯度: 0.0 % 色质指数: 87.7
LER(TM-30): 254.5 辐射功率: 15289.8 mw 色域指数(Rg): 105.6 逼真度(Rf): 91.6
红光辐射功率: 4960.0 mw 近红辐射功率: 883.6 mw 远红辐射功率: 61.3 mw

电参数:







光效: 20.7 Lm/W 能效: 22.6 能效等级: G
电压: 221.4 V 电流: 0.888 A 功率: 187.800 W 功率因素: 0.954

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/26/14
备注:

Rf: 91.6 CCT: 5271K u': 0.2146
Rg: 105.6 LER: 254.5 Duv: -0.00797 v': 0.4725



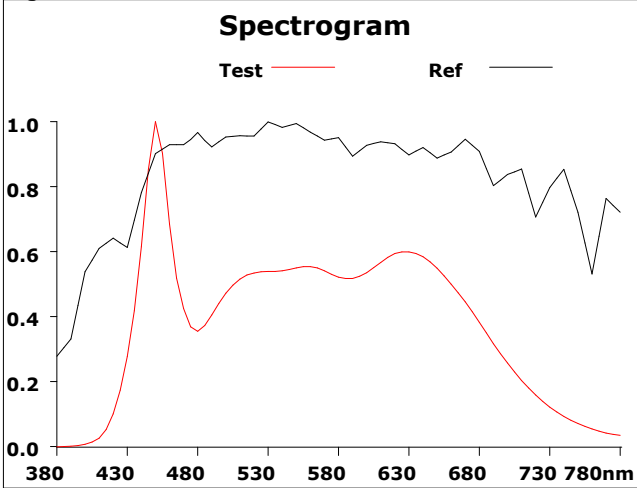


500			
Hue Bin	Rf	Chroma	Hue
1	93.8	1.7%	-0.1%
2	95.1	1.1%	0.8%
3	91.3	1.5%	3.4%
4	92.5	1.2%	3.4%
5	91.6	2.2%	2.9%
6	91.8	4.7%	1.8%
7	94.6	3.0%	0.4%
8	94.5	1.7%	0.7%
9	94.5	-0.3%	2.6%
10	91.1	-0.4%	4.5%
11	84.6	1.8%	8.4%
12	89.4	2.1%	6.2%
13	90.6	5.1%	5.7%
14	89.3	4.6%	3.7%
15	87.3	10.1%	-1.5%
16	92.2	3.8%	-1.1%

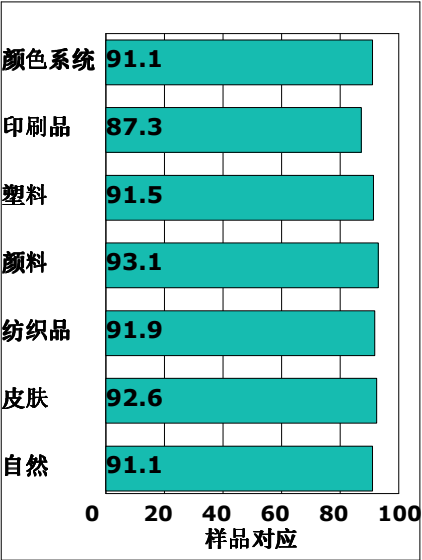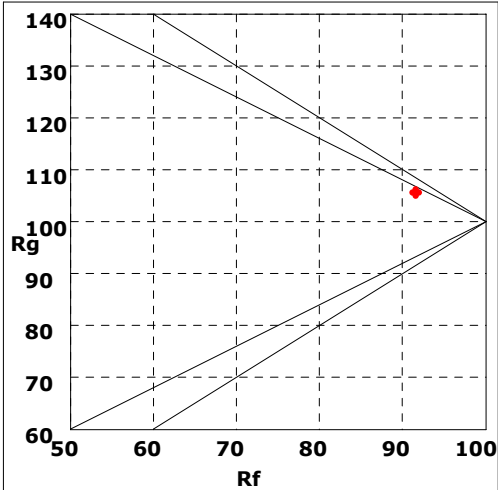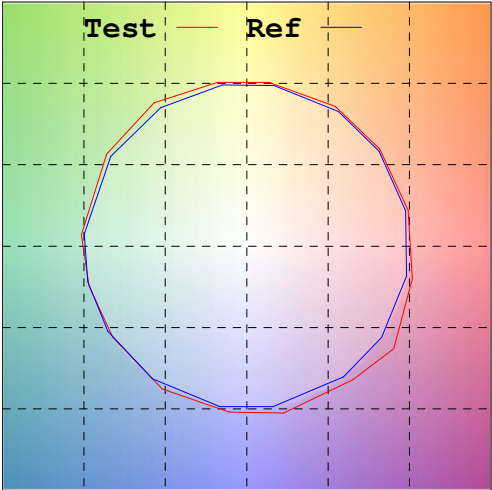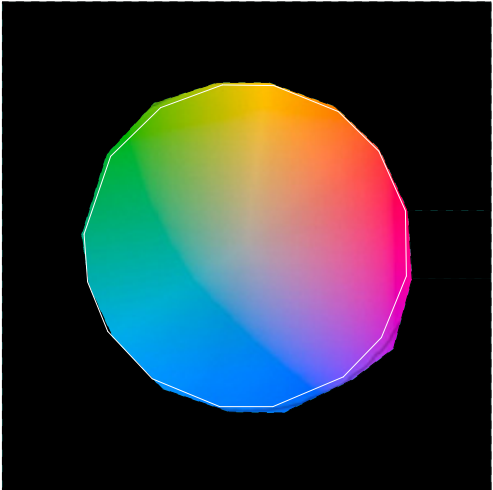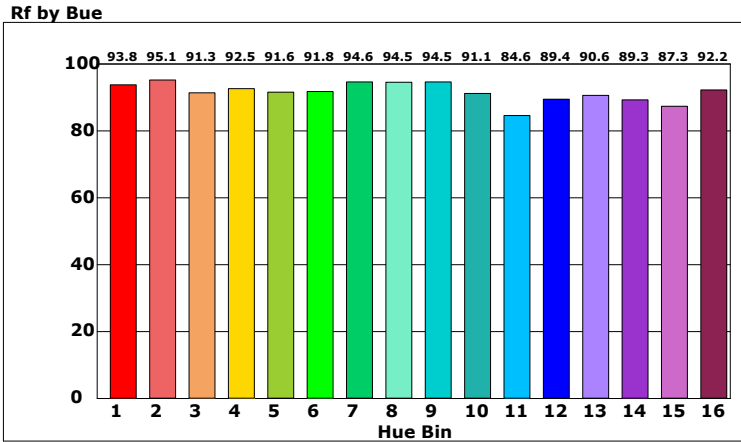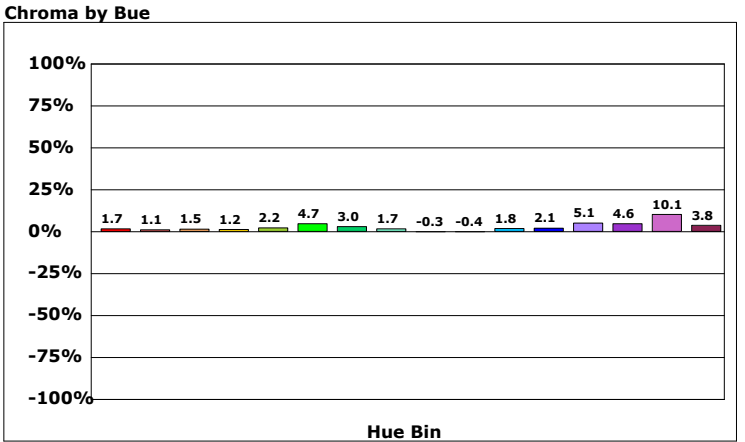


产品型号:
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:07/26/14

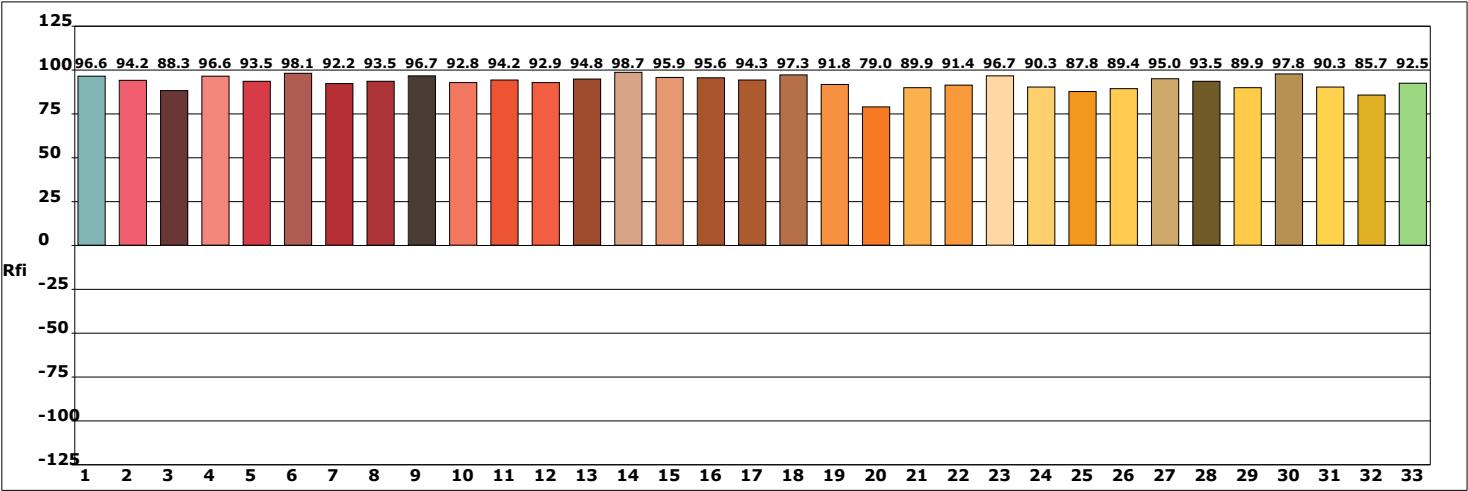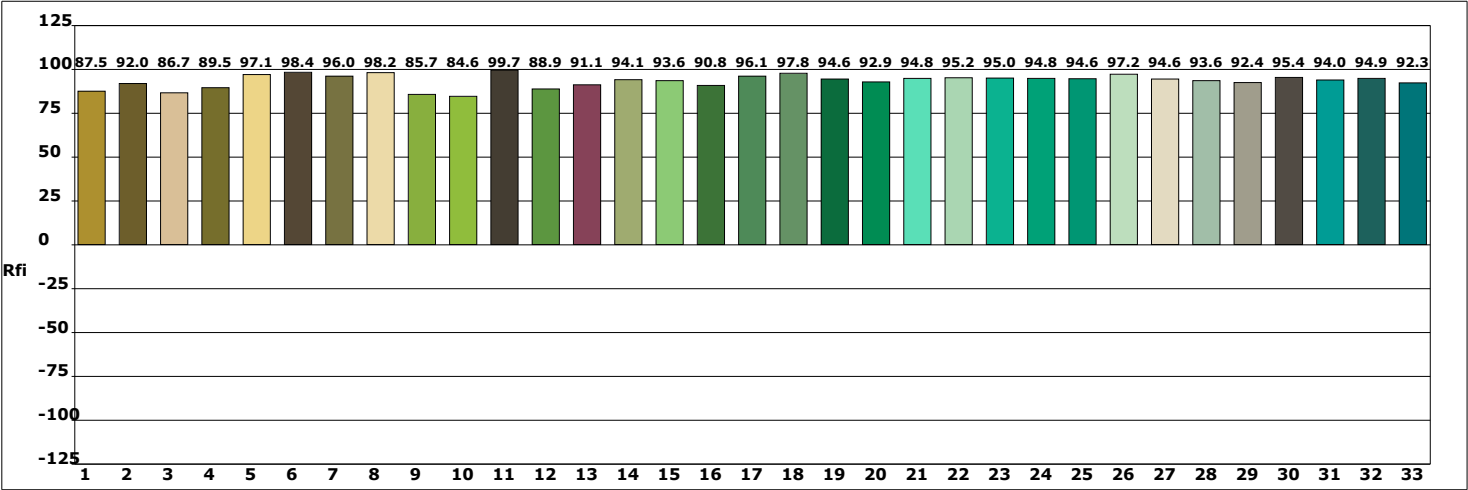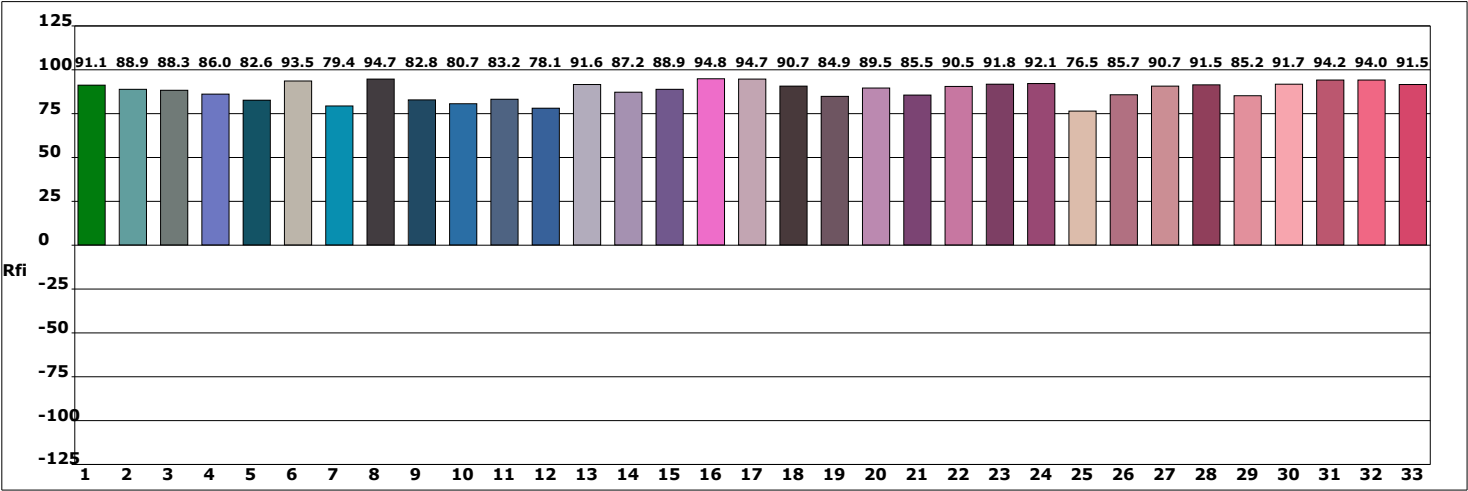

光谱图

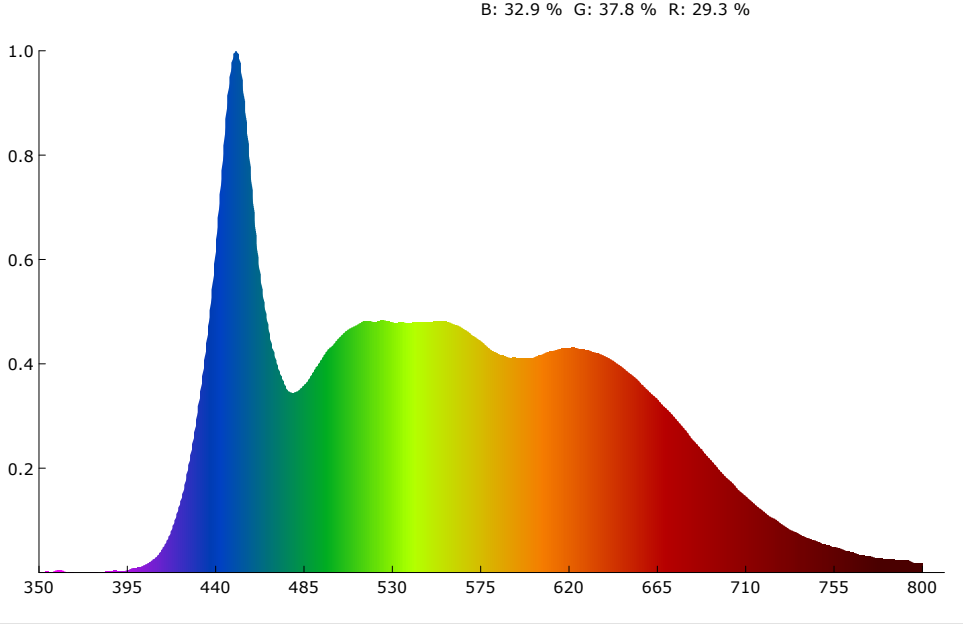

SDCM

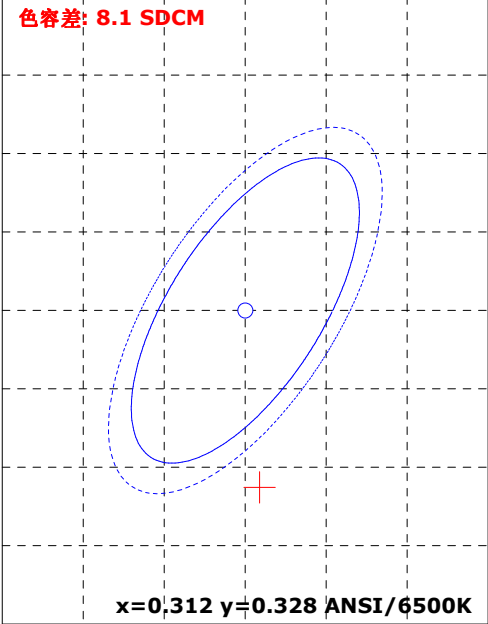

颜色参数:

坐标x: 0.3132 坐标y: 0.3169 坐标u: 0.2028 坐标v: 0.3078 坐标u': 0.2028 坐标v': 0.4617
红色比: 29.3 % 绿色比: 37.8 % 蓝色比: 32.9 % 光通量红色比: 15.6 % 光通量绿色比: 79.8 % 光通量蓝色比: 4.6 %

显色指数: 95.5 AvgR: 93.7
R1: 96.4 R2: 96.9 R3: 91.7 R4: 95.1 R5: 98.2 R6: 93.5 R7: 97.0 R8: 95.3
R9: 88.4 R10: 92.8 R11: 93.3 R12: 79.5 R13: 97.4 R14: 95.0 R15: 94.8


色温: 6584 K 光通量: 3974.625 lm 峰值波长: 450.6 nm 色容差: 8.1
明暗视觉比: 2.4 中心波长: 451.6 nm 主波长: 480.2 nm 质心波长: 556.9 nm
半宽度: 27.8 nm 色偏差: -0.00343 色纯度: 8.3 % 色质指数: 90.2
LER(TM-30): 256.1 辐射功率: 15520.2 mw 色域指数(Rg): 102.7 逼真度(Rf): 91.7
红光辐射功率: 4301.3 mw 近红辐射功率: 786.0 mw 远红辐射功率: 59.3 mw

电参数:





光效: 21.7 Lm/W 能效: 23.6 能效等级: G
电压: 220.9 V 电流: 0.871 A 功率: 183.500 W 功率因素: 0.953

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/26/14
备注:


Rf: 91.7 CCT: 6584K u': 0.028
Rg: 102.7 LER: 256.1 Duv: -0.00343 v': 0.4617

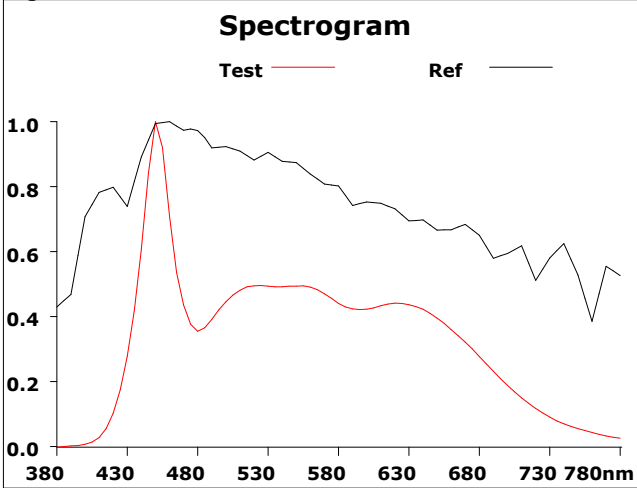


500			
Hue Bin	Rf	Chroma	Hue
1	94.4	0.5%	-0.0%
2	95.9	-0.2%	1.5%
3	93.4	0.5%	2.1%
4	92.4	0.2%	3.1%
5	91.2	-0.5%	1.7%
6	95.5	1.6%	1.1%
7	97.3	0.7%	0.1%
8	95.1	-0.6%	1.9%
9	92.3	-1.9%	5.5%
10	86.2	-0.9%	8.6%
11	81.2	1.8%	9.4%
12	89.9	2.1%	5.8%
13	90.9	5.0%	4.7%
14	93.5	2.6%	1.6%
15	85.7	11.4%	-4.2%
16	95.9	1.5%	-0.6%

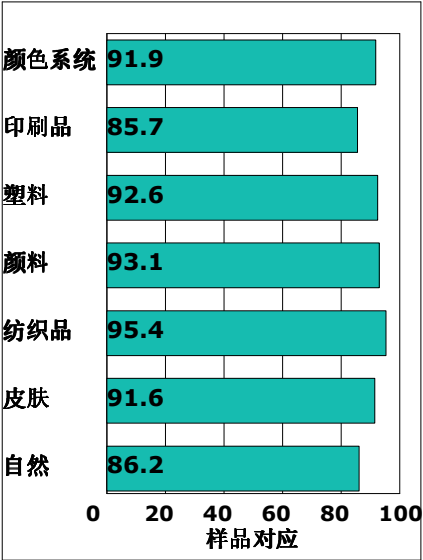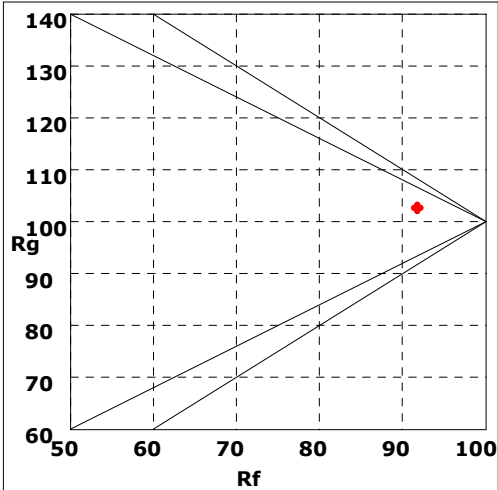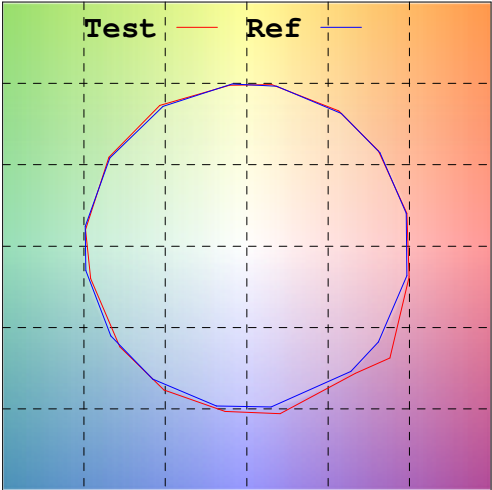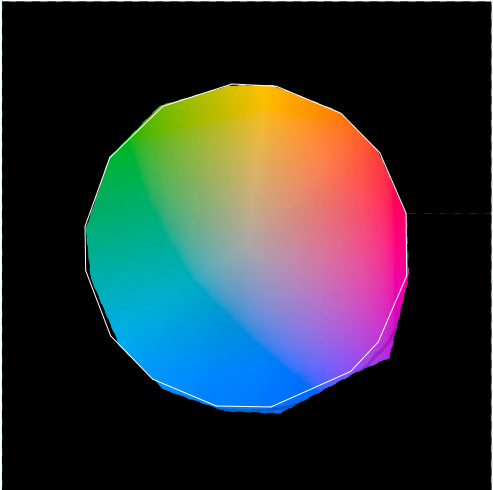

Rf by Bue

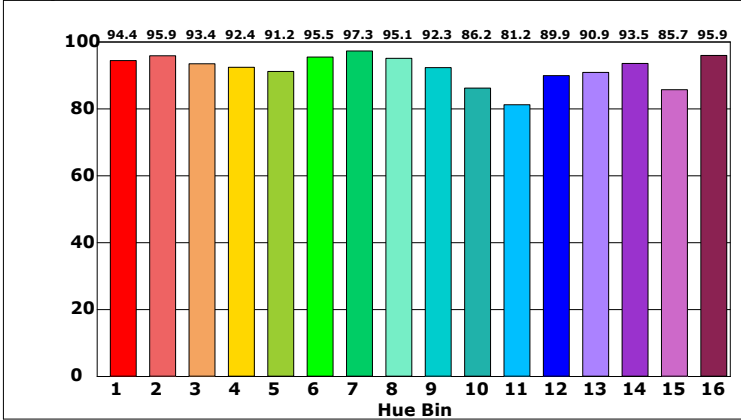

Chroma by Bue

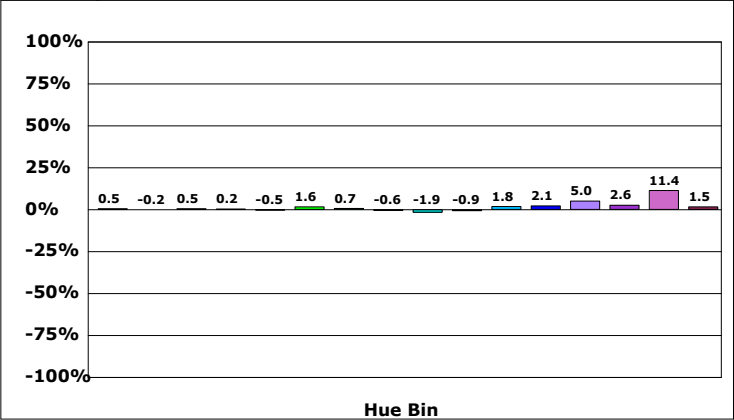

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:07/26/14

