



光谱图

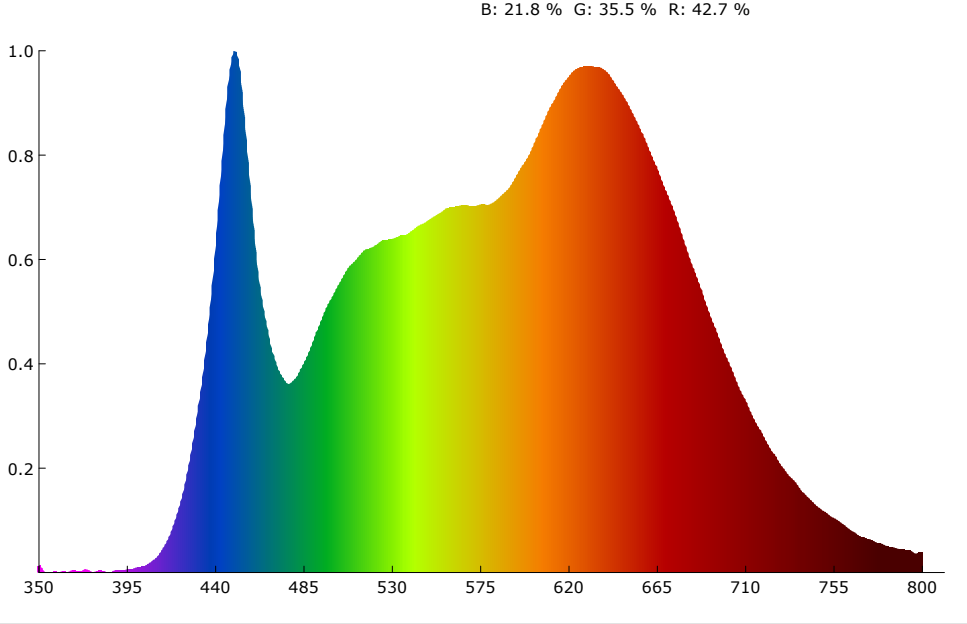

SDCM

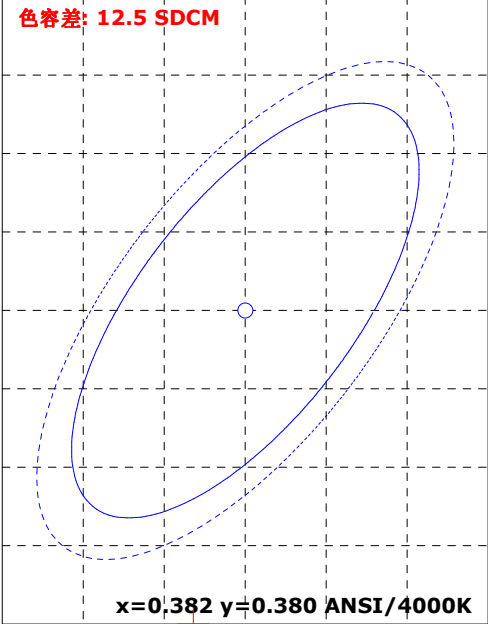

颜色参数:

坐标x: 0.3786 坐标y: 0.3528 坐标u: 0.2338 坐标v: 0.3268 坐标u': 0.2338 坐标v': 0.4902
红色比: 42.7 % 绿色比: 35.5 % 蓝色比: 21.8 % 光通量红色比: 21.9 % 光通量绿色比: 75.1 % 光通量蓝色比: 3.0 %

显色指数: 93.0 AvgR: 91.0
R1: 90.9 R2: 94.7 R3: 95.6 R4: 90.6 R5: 92.1 R6: 93.0 R7: 96.8 R8: 90.6
R9: 76.9 R10: 91.7 R11: 87.4 R12: 88.7 R13: 91.4 R14: 96.6 R15: 88.3


色温: 3861 K 光通量: 4616.394 lm 峰值波长: 449.6 nm 色容差: 12.5
明暗视觉比: 1.8 中心波长: 451.2 nm 主波长: 588.4 nm 质心波长: 583.3 nm
半宽度: 26.9 nm 色偏差: -0.01115 色纯度: 19.5 % 色质指数: 84.9
LER(TM-30): 251.7 辐射功率: 18337.3 mw 色域指数(Rg): 106.5 逼真度(Rf): 92.6
红光辐射功率: 7237.8 mw 近红辐射功率: 1289.0 mw 远红辐射功率: 85.1 mw

电参数:




光效: 24.4 Lm/W 能效: 26.6 能效等级: G
电压: 221.1 V 电流: 0.894 A 功率: 188.900 W 功率因素: 0.955

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/26/14
备注:


Rf: 92.6 CCT: 3861K u': 0.2338
Rg: 106.5 LER: 251.7 Duv: -0.01115 v': 0.4902

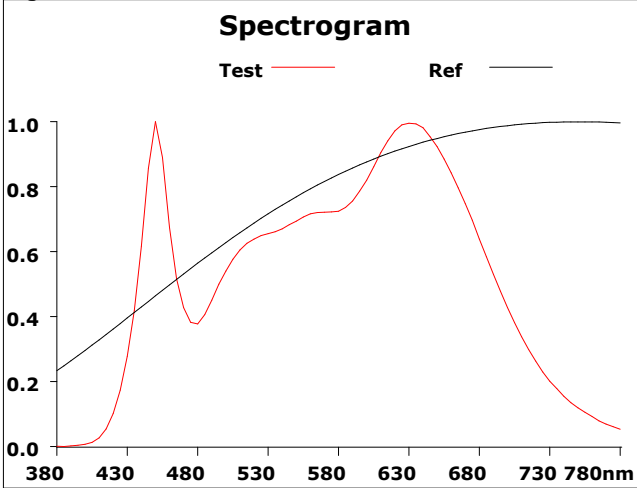

500			
Hue Bin	Rf	Chroma	Hue
1	94.4	2.2%	-0.4%
2	95.3	1.7%	0.2%
3	92.9	2.1%	2.3%
4	94.5	1.4%	2.0%
5	92.2	2.3%	2.2%
6	91.2	5.4%	1.6%
7	93.1	4.0%	-0.1%
8	92.4	3.2%	0.0%
9	94.6	2.0%	0.5%
10	96.0	0.3%	0.7%
11	89.8	2.4%	5.7%
12	88.6	3.9%	4.5%
13	93.7	3.3%	2.6%
14	89.4	8.7%	2.4%
15	91.1	5.0%	0.4%
16	89.1	5.0%	-3.4%

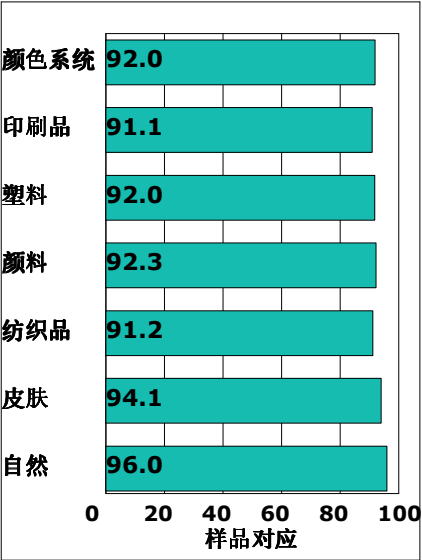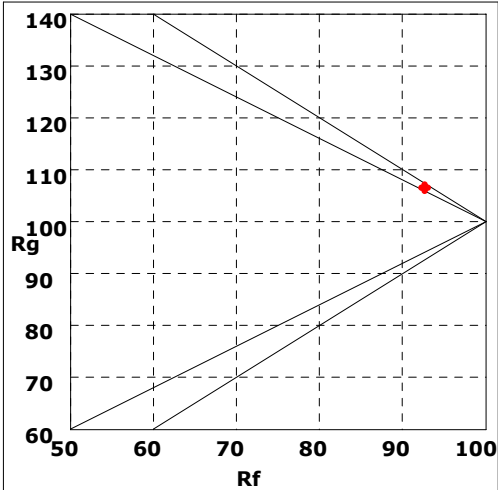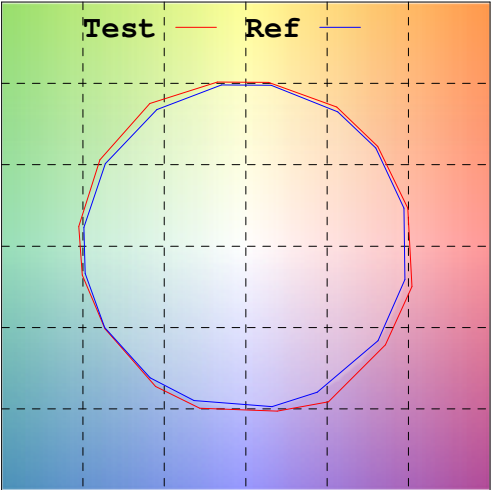

Rf by Bue

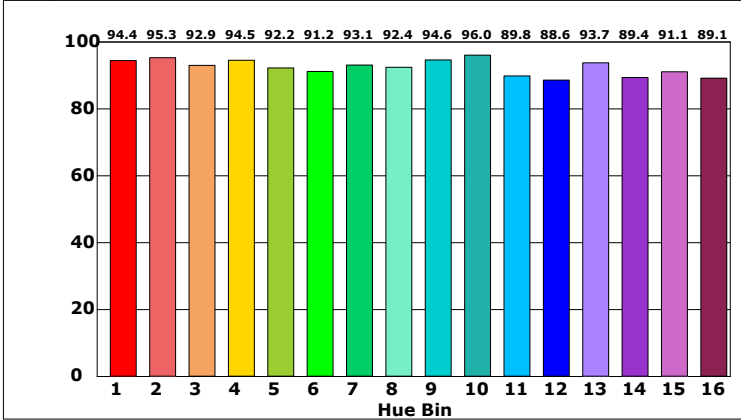

Chroma by Bue

